EUROPEAN PRODUCT PROTECTION

SOLUTIONS

Trusted Industry Partner
Since 1948

More than **60.000 Products** Manufactured in House

caplugs®

A Personal Message from Our CEO

I'm proud to present our Caplugs European Catalogue. Every page of quality products is the result of 75 years of dedication to solving customer challenges. We offer the most comprehensive protection portfolio available today, from product and hose protection to masking and custom moulded parts.

We Make It Easy to Do Business with Us.
We are a global leader with four manufacturing facilities across Europe, each with a full local team to ensure responsive, in-language service. We have a full team of external solutions experts that will come to your facility for your convenience. To support you through sampling, quoting, ordering and delivery, we have a dedicated team of internal customer service representatives in each facility.

Valuing Tradition. Driving Innovation.
Caplugs Europe has integrated the traditions of brands such as Safeplast, Polykap, and Kiba into our ongoing expansion of catalogue and custom offerings. We maintain the team and facility to ensure the quality and service remains, while adding even more product lines and locally manufactured product to offer customers a broader selection and a one-stop shop for protection.

Solutions, Not Just Parts.
Our team discusses your needs and challenges. We start with a comprehensive understanding of your application and technical requirements. From there, we can offer you options to fit your application and provide free samples for trials. We pride ourselves on the broadest catalogue product offering, but for highly specific applications, we can design and manufacture a part to meet your specific needs.

We Are the Experts: Protection, Plastics, Tooling and Manufacturing
We are not a distributor, we manufacture all our products ensuring we control the quality and can customise your products as needed. With more than 75 years of experience and more than 28,000 customers today, we are the trusted partner for your protection needs.

caplugs

European Product Protection Solutions

75 caplugs®

A Legacy of Innovation

For 75 years, Caplugs has proudly served as the leader in product protection, moulded components and masking. We provide the broadest range of innovative, high performing solutions, the highest manufacturing quality, and the most responsive service in the industry.

More Than Just Caps and Plugs

Caplugs parts are purpose designed to perform in your environment. They are manufactured from high quality materials that are resistant to heat, chemicals and UV light. And their ergonomic construction enables quick and easy installation and removal.

SAFEPLAST

Kirsebauer

POLYCAP

Our Achievements

500,000,000
parts in stock

60,000+
catalogue products

32,000,000
parts produced per day

13
manufacturing facilities

Over **375**
moulding machines

The **1** partner you need

European Product Protection Solutions

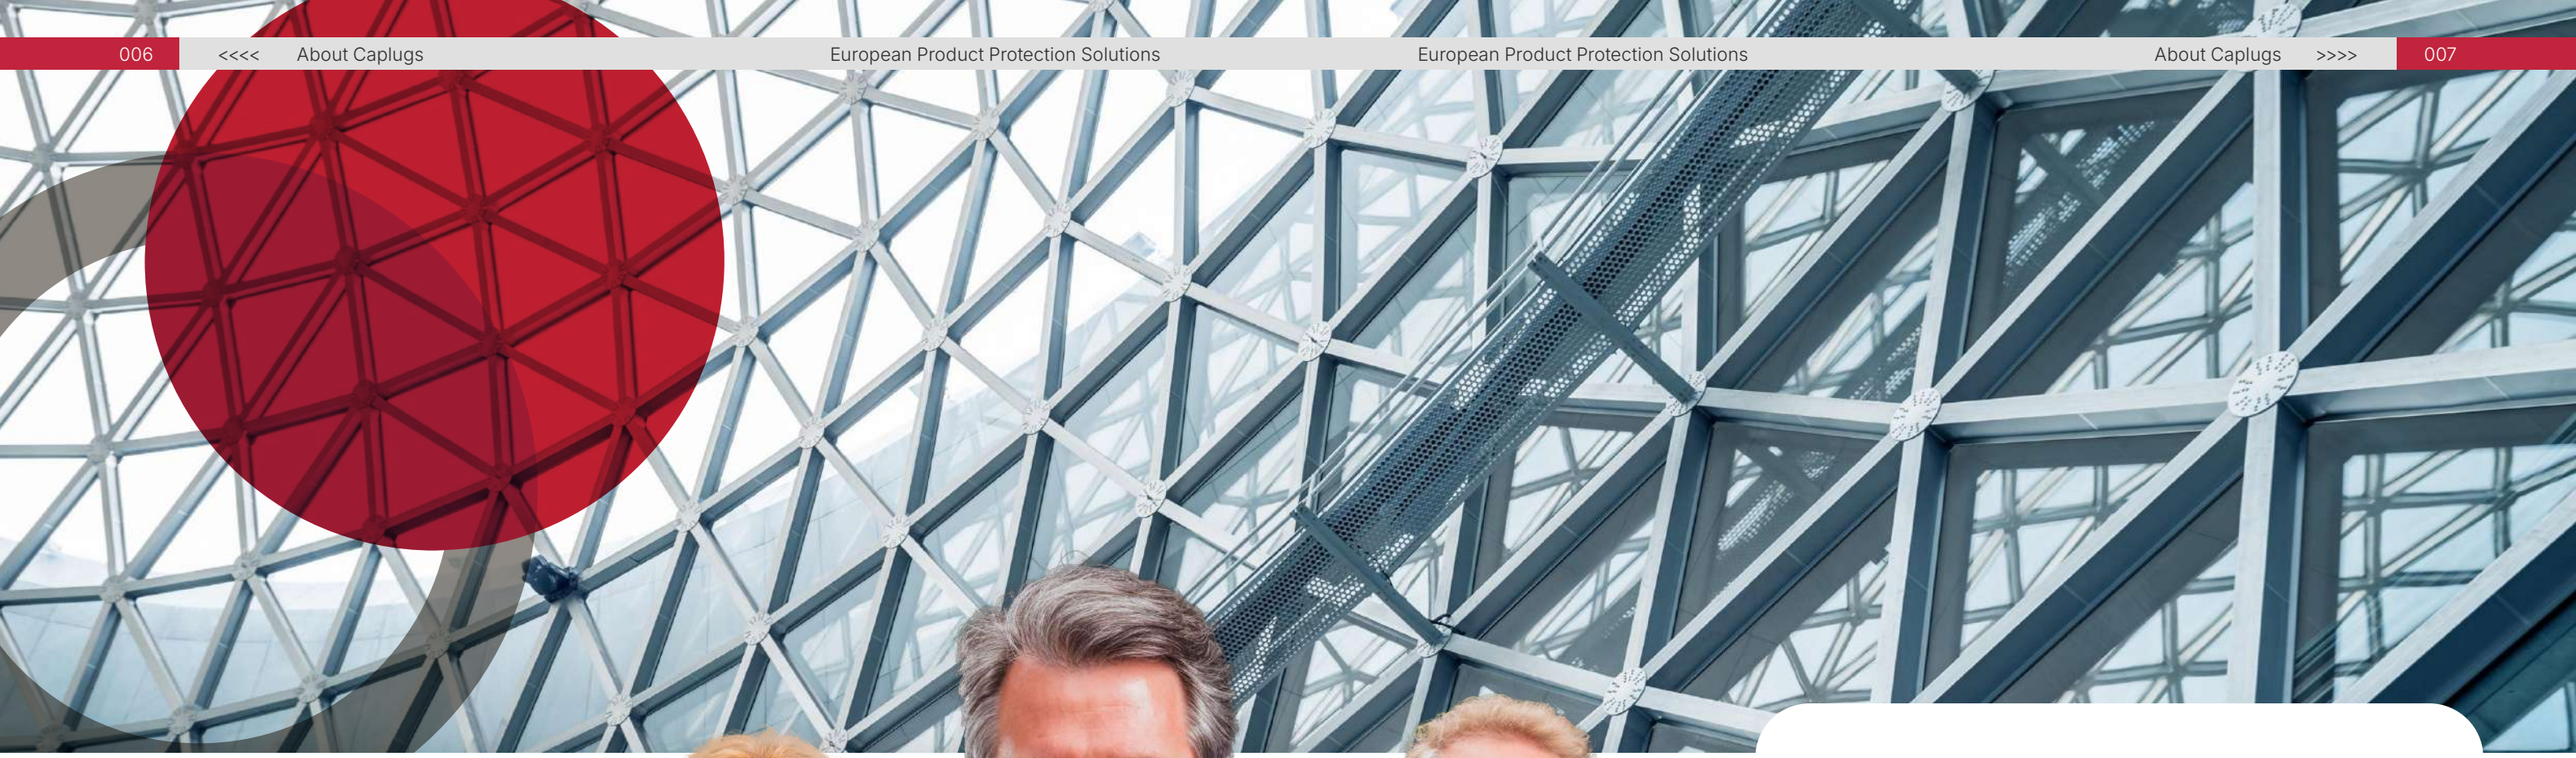

Contact us
sales.eu@caplugs.com
+31 73 643 02 88

"Every day at Caplugs, guided by our mission and vision, we dedicate ourselves to enriching our customers' experience of our brand and enhancing the value we bring to their operations and enterprises."

Our **Vision**

Caplugs is the **first choice** and **trusted partner** for **product protection** and **component solutions** across the globe. Driven by our commitment to provide unmatched service and innovative products that perform.

Our vision is driven by relentless dedication to innovation and informed by a deep understanding of our customers' evolving needs, ensuring we create solutions that protect and prolong product excellence.

Our **Mission**

We take pride in being **the leader**. The Caplugs team combines the **best quality** and **service** with the widest offering of product and capabilities to solve all of our customers' product protection and component needs.

We deliver our mission through proactive application of depth of insight, constantly expanding breadth of choice, and ever-growing heights of achievement, to deliver solutions for all our customers' divers needs.

002 Introduction

006 About Caplugs

010 Product Overview

026 Manufacturing Powerhouse

028 Production Methods

036 Customisation

038 Ordering Samples

040 FAQ

042 Markets Served

Caplugs Catalogue

Introduction

Introduction 002
About Caplugs 006
Product Overview 010
Manufacturing Powerhouse 026
Production Methods 028
Customisation 036
Ordering Samples 038
Frequently Asked Questions 040
Markets Served 042

Products

Caps 056
Threaded Caps 134
Plugs 156
Threaded Plugs 186
Masking Caps 250
Masking Plugs 302
Masking Miscellaneous 390
Masking Tapes 402
Tapes Selector Guide 436
Find Your Tape 438
Masking Discs and Shapes 440
Packaging and Netting 496
Pipe and Flange Protection 506
Spirals 518
Protective Textiles 544
Accessories 558
American Products 564

Additional Information

Military and Aerospace 580
Material Data Chart 582
Material Selection by Temperature 586
Colour Options 588
Index 592
Terms and Conditions 594
Caplugs Mug 598
Draft Paper 599
The Protective Promise 602

European Product Protection Solutions Product Overview >>>> 011

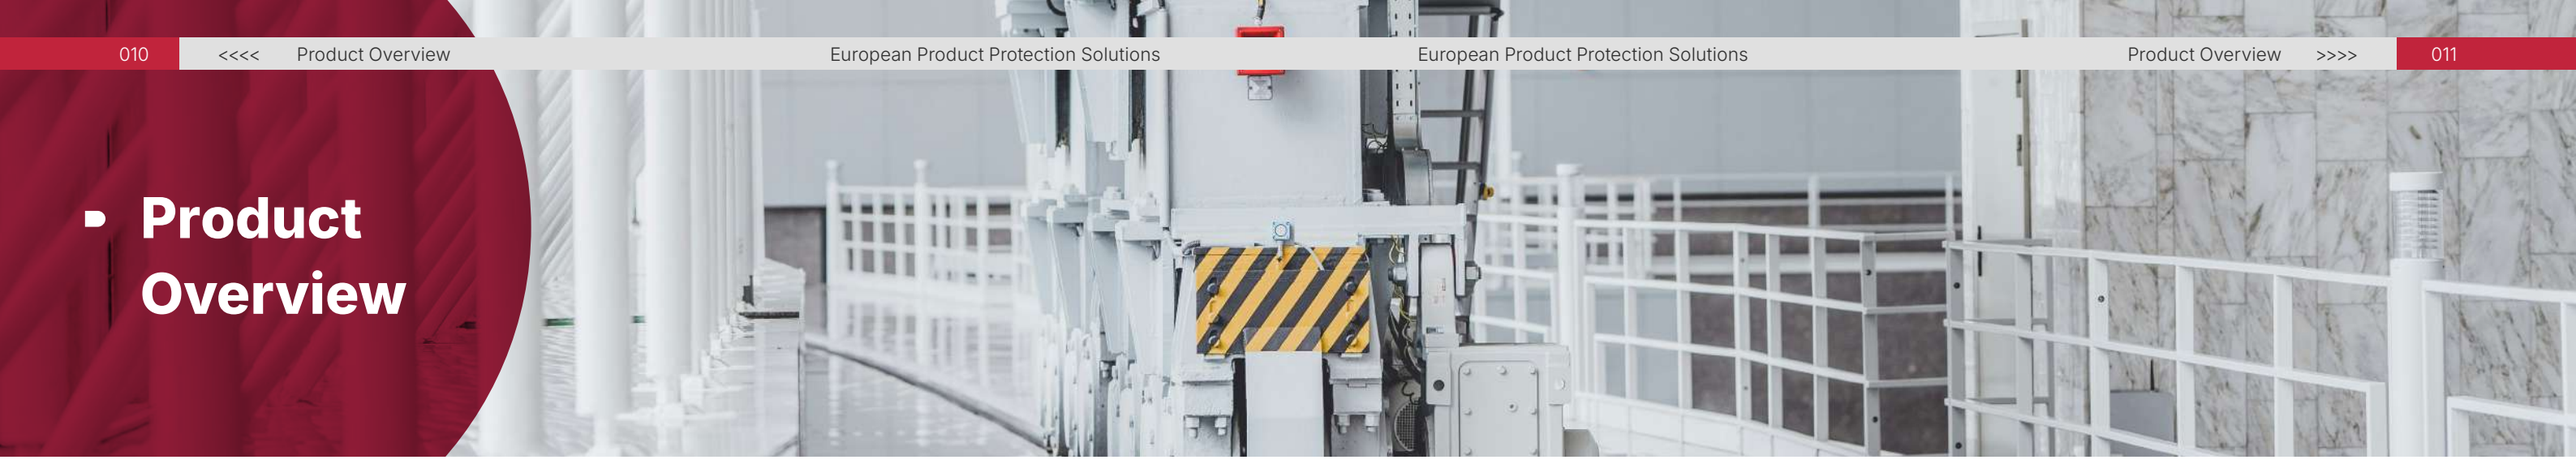

Product Overview

Caps

Non-Threaded Caps

K Series
Durable Precision Cap
Page 058

KPI Series
Internally Ribbed Cap
Page 060

SC Series
Sleeve Cap
Page 062

M Series
Profiled Lug Cap
Page 064

GMP Series
Push-On Cap
Page 068

GMB Series
Push-On Cap
Page 070

T Series
Dish Cap
Page 072

R Series
Knurled Texture Cap
Page 076

RU Series
High Precision Knurled Cap
Page 080

AS138 Series
Connector Dust Cap
Page 082

IKQ Series
Push-On Protection Cap
Page 094

GK Series
Wraparound Grip Cap
Page 095

PLO Series
Open-Tethered Cap
Page 096

PLC Series
Close-Tethered Cap
Page 097

PQN Series
Ribbed Cap
Page 098

PQT Series
Tethering Hole Tab Cap
Page 099

VC Series
Dome Sealing Cap
Page 100

VFE Series
Extended Grip Pull-Tab Cap
Page 120

VFC Series
Flat Pull-Tab Cap
Page 122

EZ Series
Pull-Tab Cap
Page 123

VSC Series
Safety Cap
Page 124

VRF Series
Straight Edged Cap
Page 126

VRR Series
Friction Fit Cap
Page 130

BFS Series
Banjo Fittings-Specific Cap
Page 132

Threaded Caps

Threaded Caps

CD Series
JIC Fittings Cap
Page 136

TCV Series
Ribbed Grip Cap
Page 138



ASC Series
Flared Fittings Cap
Page 141

TCW Series
Ribbed Grip Cap
with Gasket
Page 142



TCF Series
Reinforced Ribbed Cap
Page 148



TCE Series
Reinforced Ribbed Cap
with Gasket
Page 151

PEC Series
Tethered Cap
Page 154

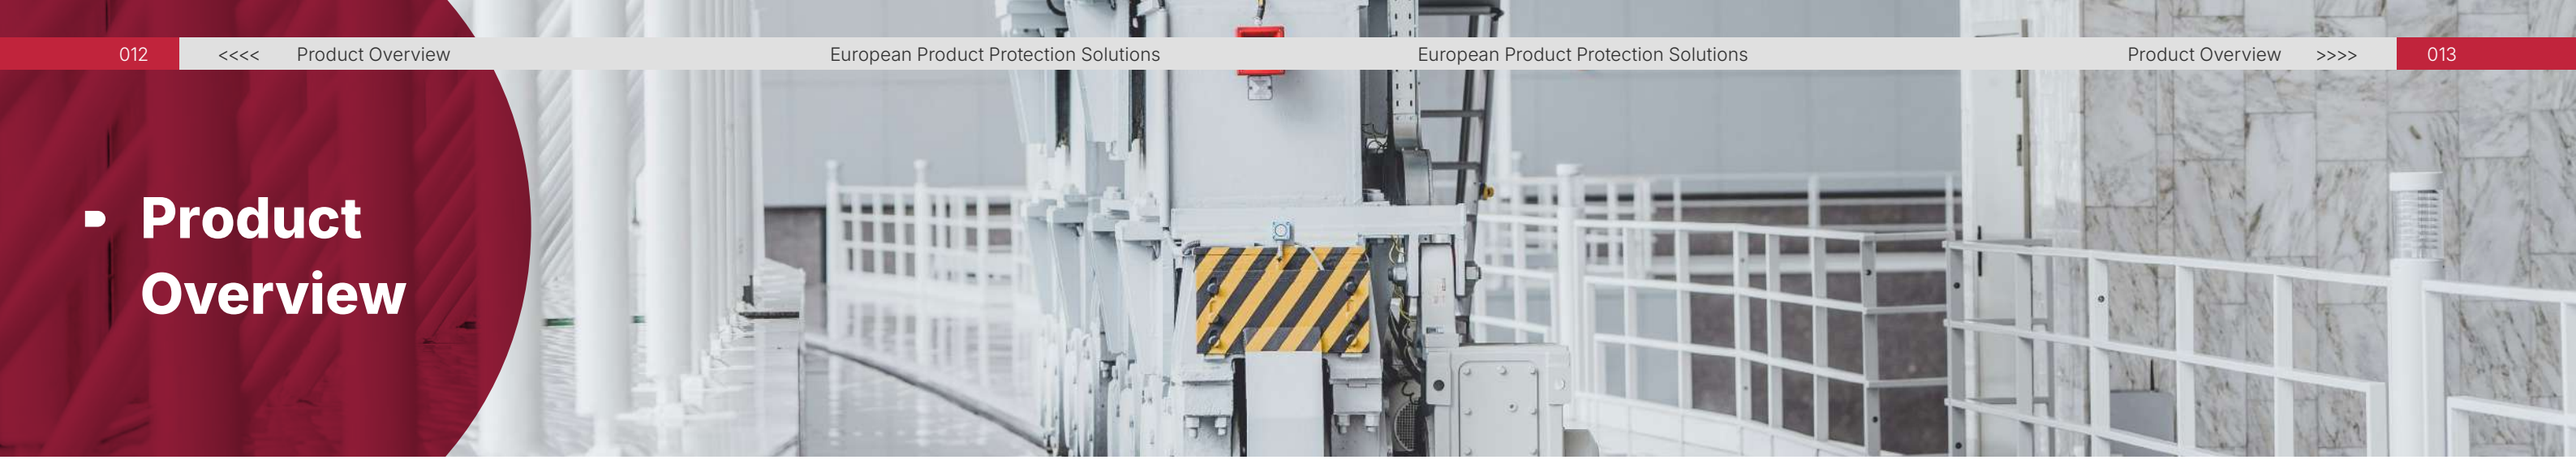

Product Overview

Plugs

Non-Threaded Plugs

H Series
Sealing Stopper Plug
Page 158

LL Series
High-Fidelity-Fit Plug
Page 164

LH Series
Long Lug Plug
Page 166

LB Series
Uniform Pressure Plug
Page 168

PSN Series
Tab-Free Plug
Page 170

PST Series
Tabbed Plug
Page 171

GEO Series
Flexible Pull-Tab Plug
Page 172

M Series
Profiled Lug Plug
Page 174

GMP Series
Push-In Plug
Page 178

T Series
Dish Plug
Page 180

Threaded Plugs

Threaded Plugs

TPY Series
Reliable Hex Threaded Plug
Page 188

TPF Series
Reinforced Threaded Plug
Page 194

TPM Series
Enhanced Performance Threaded Plug with Gasket
Page 200

TPL Series
Enhanced Performance Threaded Plug
Page 206



TPE Series
Reinforced Threaded Plug with Gasket
Page 212

TPG Series
Enhanced Performance Threaded Plug with Oil Seal Gasket
Page 218

TPC Series
Enhanced Performance Colour Coded Threaded Plug with Gasket
Page 220

TPV Series
Streamlined Installation Threaded Plug
Page 226

TPW Series
Streamlined Installation Threaded Plug with Gasket
Page 228

SL1 Series
Screw Plug
Page 230

SL2 Series
Ribbed Screw Plug
Page 232

SK1 Series
Compact Plug
Page 234

SK2 Series
Compact Ribbed Plug
Page 236

SR Series
Ridged Screw Plug
Page 238

PEP Series
Tethered Plug
Page 240

PD Series
Fluid Line Plug
Page 242

ASP Series
Leak Proof Plug
Page 246

ADP Series
Lightweight Plug
Page 248

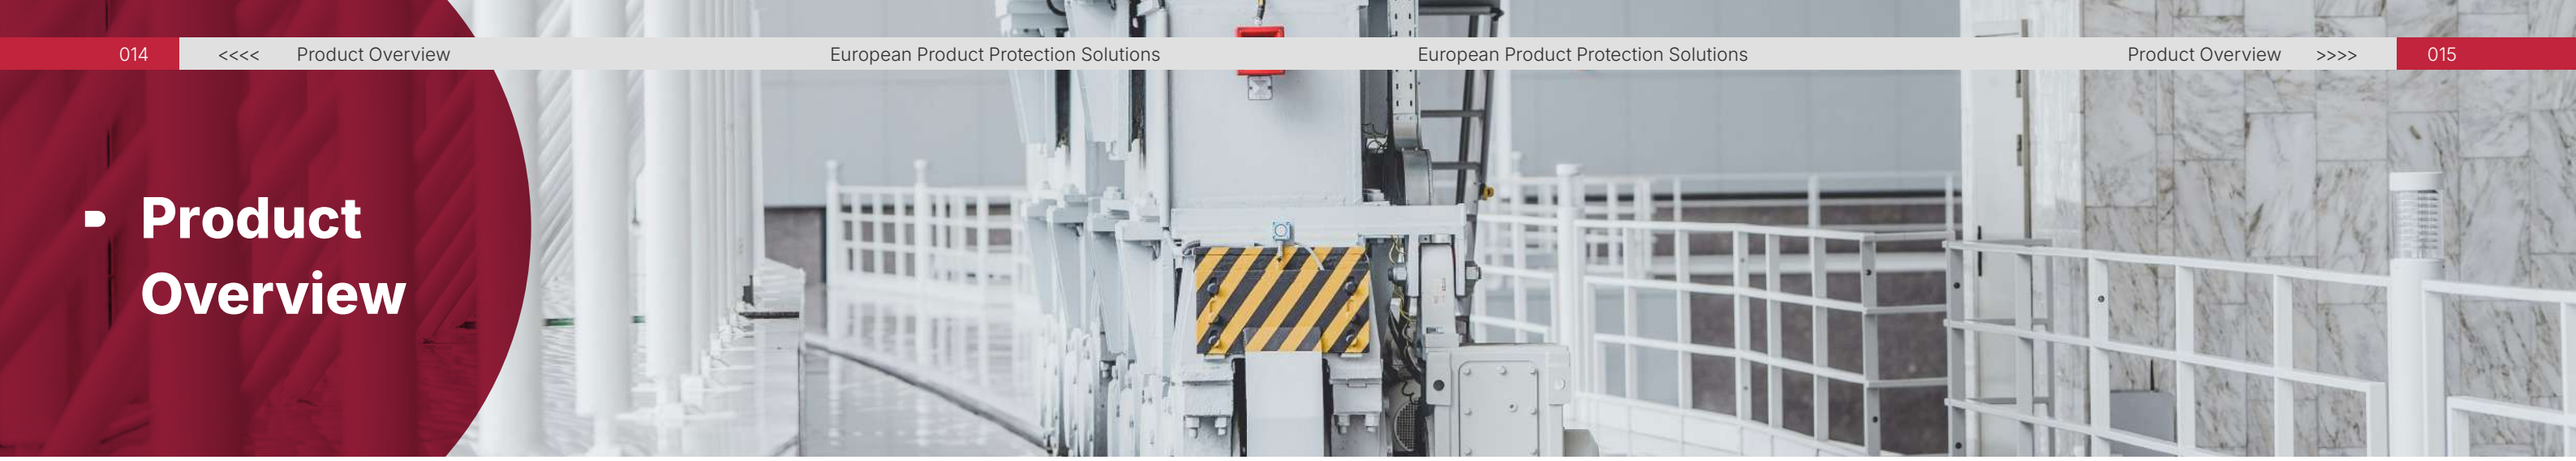

Product Overview

Masking Caps

Non-Threaded Caps

SC-SH Series
Flexible Push-On Cap
Page 252

RC-SH Series
Precision Finish Cap
Page 262

WC-SH Series
Washer Cap
Page 264



SRC-SH Series
Earthing Cap
Page 266

ZC-S-SH Series
Grease Nipple Cap
Page 268

ZC-L-SH Series
Grease Nipple Cap
Page 270

HVC Series
Flexible Conformance Cap
Page 272

HEZ Series
Flexible Pull-Tab Cap
Page 284

HFC Series
Flat Pull-Tab Cap
Page 288

TS Series
Tapered Cap
Page 292

TSV Series
Vented Cap
Page 296

UVCP-SH Series
Vented Cap
Page 300

SFC Series
Flange Cap
Page 301

Masking Plugs

Non-Threaded Plugs

UP-SH Series
Tapered Plug
Page 304

HUP-SH Series
Hollow Plug
Page 306

UPH-SH Series
Tapered Handle Plug
Page 308

HUPH-SH Series
Hollow Handle Plug
Page 310

TS Series
Tapered Plug
Page 312

TSV Series
Vented Plug
Page 316

GN-SH Series
Heat Resistant Plug
Page 320

BN-SH Series
Push-In Plug
Page 322

TP-SH Series
Tapered Plug
Page 324

SPP-SH Series
Pull Tab Plug
Page 326

PP-SH Series
Pull Plug
Page 332

SHPP-SH Series
Hollow Pull Plug
Page 336

CSP-SH-Series
Countersink Hole Plug
Page 338

CSPP-SH Series
Countersink Hole Pull Plug
Page 340

BWNP-SH Series
Blind Weld Nut Plug
Page 342

WNP-SH Series
Weld Nut Pull Plug
Page 344

UWPP-SH Series
Standard Washer Pull Plug
Page 346

UWPPLS-SH Series
Long Washer Pull Plug
Page 348

UWM-SH Series
Washer Mask Cap
Page 350

HFPP-SH Series
Hollow-Flanged Pull Plug
Page 352

DFPP-SH Series
Dual Flanged Pull Plug
Page 354

LEPP-SH Series
Pull Tab Plug
Page 356

UDPP-SH Series
Dual Purpose Plug
Page 358

UMFP-SH Series
Multi-Flanged Plug
Page 360

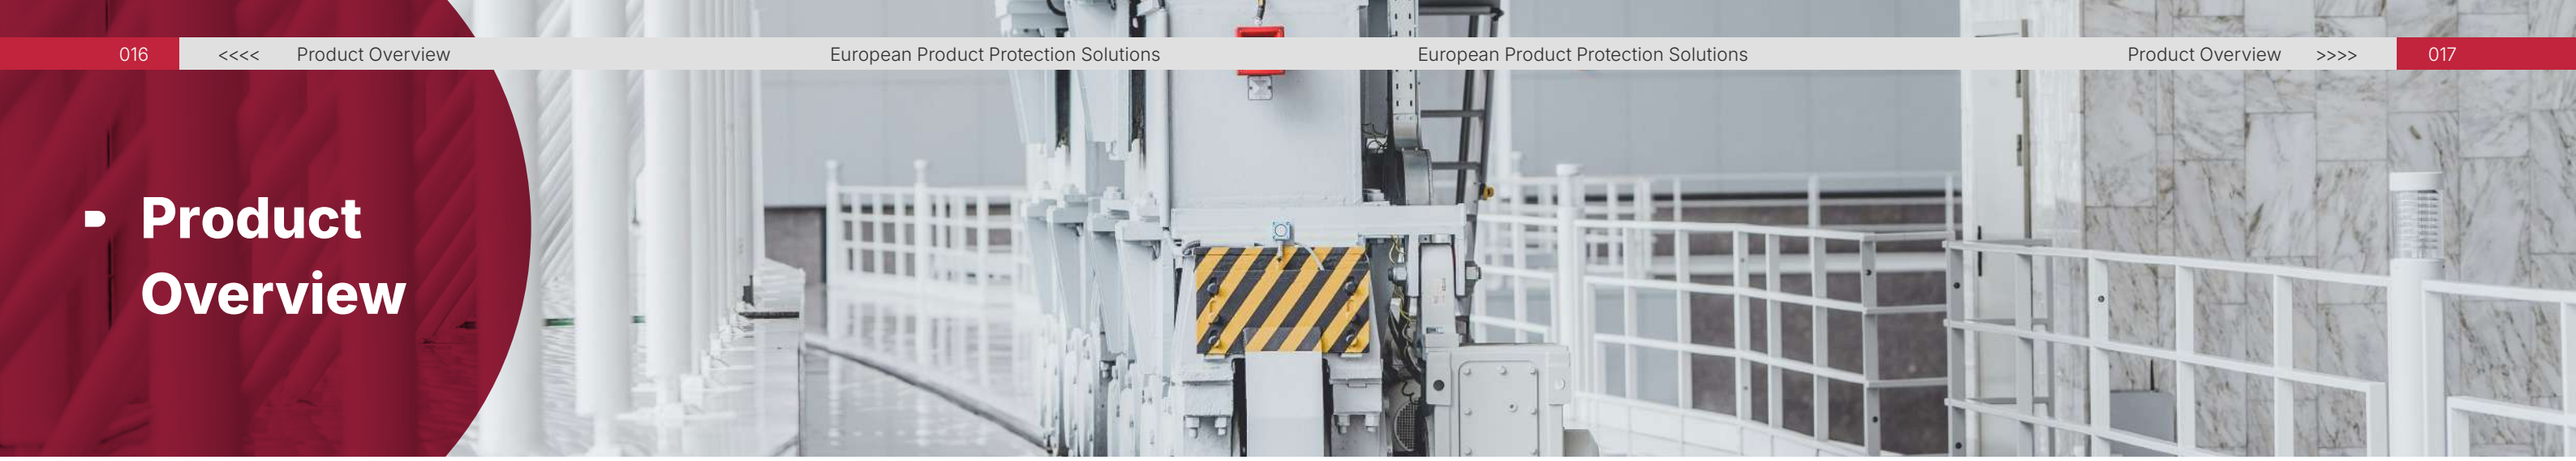

Product Overview

Masking Plugs

Non-Threaded Plugs

PTM-SH Series
Venting Nipple Mask
Page 362

UTM-SH Series
Standard Mask Plug
Page 364

UTMLS-SH Series
Long Mask Plug
Page 366

UFP-SH Series
Flangeless Plug
Page 368

FP-SH Series
Flangeless Plug
Page 370

HTP Series
Small Tapered Plug
Page 371

UW-SH Series
Dual Washer Plug
Page 372

SWP Series
Washer Plug
Page 374

SP-SH Series
Step Plug
Page 376

SFP-SH Series
Flanged Plug
Page 378

HWP-SH Series
Hollow Washer Plug
Page 380

MSP-SH Series
Flexible High Temperature Plug
Page 381

MPP-SH Series
Miscellaneous Plug
Page 382

MT-SH Series
'Mouse Tail' Plug
Page 384

UHCP-SH Series
Hollow Cone Plug
Page 386

RCK-SH Series
Regular Plug
Page 387

STPS-SH Series
Hangable Handle Plug
Page 389

Masking Miscellaneous

Masking Miscellaneous

BM-SH Series
Bore Mask
Page 392

CSC Series
'Shower' Cap
Page 395

US-SH Series
High Temperature Sheeting
Page 396

MDT-SH Series
Multi-Diameter Tubing Mask
Page 397

UC-SH Series
Flexible Cord
Page 398

ST-SH Series
Flexible Tube
Page 399

UST-SH Series
Flexible Star-Shaped Tube
Page 401

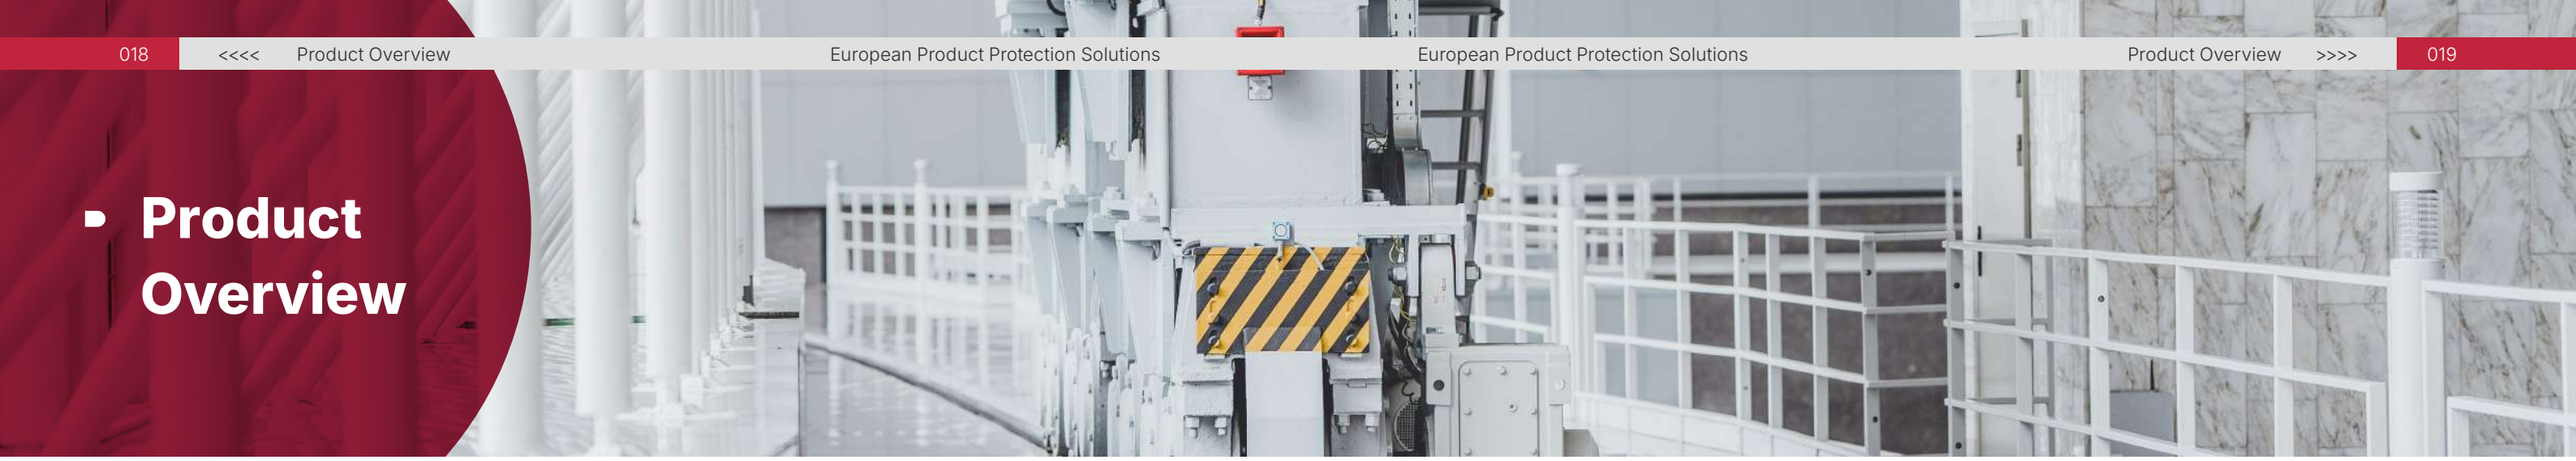

Product Overview

Masking Tapes

Masking Tapes

SRT-SH Series
High Temperature Wrapping Tape
Page 404



22-SH Series
High Temperature Tape
Page 405

PC11-SH Series
High Temperature Tape
Page 407

PC21-SH Series
High Temperature Tape
Page 409

PC25-SH Series
Heavy Duty High Temperature Tape
Page 411

PC30-SH Series
High Temperature Tape
Page 412

PC90-SH Series
Thinner Profile High Temperature Tape
Page 414

PC198-SH Series
Glass Cloth High Temperature Tape
Page 416

KD11-SH Series
High Temperature Tape
Page 418

NAY Series
Self-Adhering Tape
Page 420

SC1-100 Series
Stop-Off Tape
Page 421

232-SH Series
High-Performance Tape
Page 422

425-SH Series
Reflective Surface Tape
Page 423

470-SH Series
High-Resistance Tape
Page 424

471-SH Series
Colour-Coded Tape
Page 425



TOL Series
Same-Width Liner Tape
Page 426

TOEL-SH Series
Extended On-Liner Tape
Page 430

BT100-SH Series
Blasting Tape
Page 434

Masking Discs and Shapes

Masking Discs and Shapes

AD-SH Series
Anodising Disc
Page 442

PC-SH Series
Powder Peel Disc
Page 444

PR-SH Series
Powder Peel Disc
Page 447

PB-SH Series
Powder Peel Disc
Page 449

KP-SH Series
High Temperature Processes Disc
Page 452

GC-SH Series
Glass Cloth Disc
Page 454

Kwiky Dot™ Series
Quick Dot Disc
Page 456

E-Z Peel™ Series
Easy Peel Disc
Page 460

TF-SH Series
Teflon Disc
Page 463

AF-SH Series
Foil Disc
Page 465

LF-SH Series
Foil Disc
Page 468

PCD-SH Series
Precision Donut Shape
Page 470



PCSQ-SH Series
Pre-Cut Refining Tape
Page 471



PCRT-SH Series
Pre-Cut Streamlining Tape
Page 472

AIR-SH Series
Aircraft Window Mask
Page 473

AR-SH Series
Identification Arrow
Page 476

CD-SH Series
Identification Dots Disc
Page 490

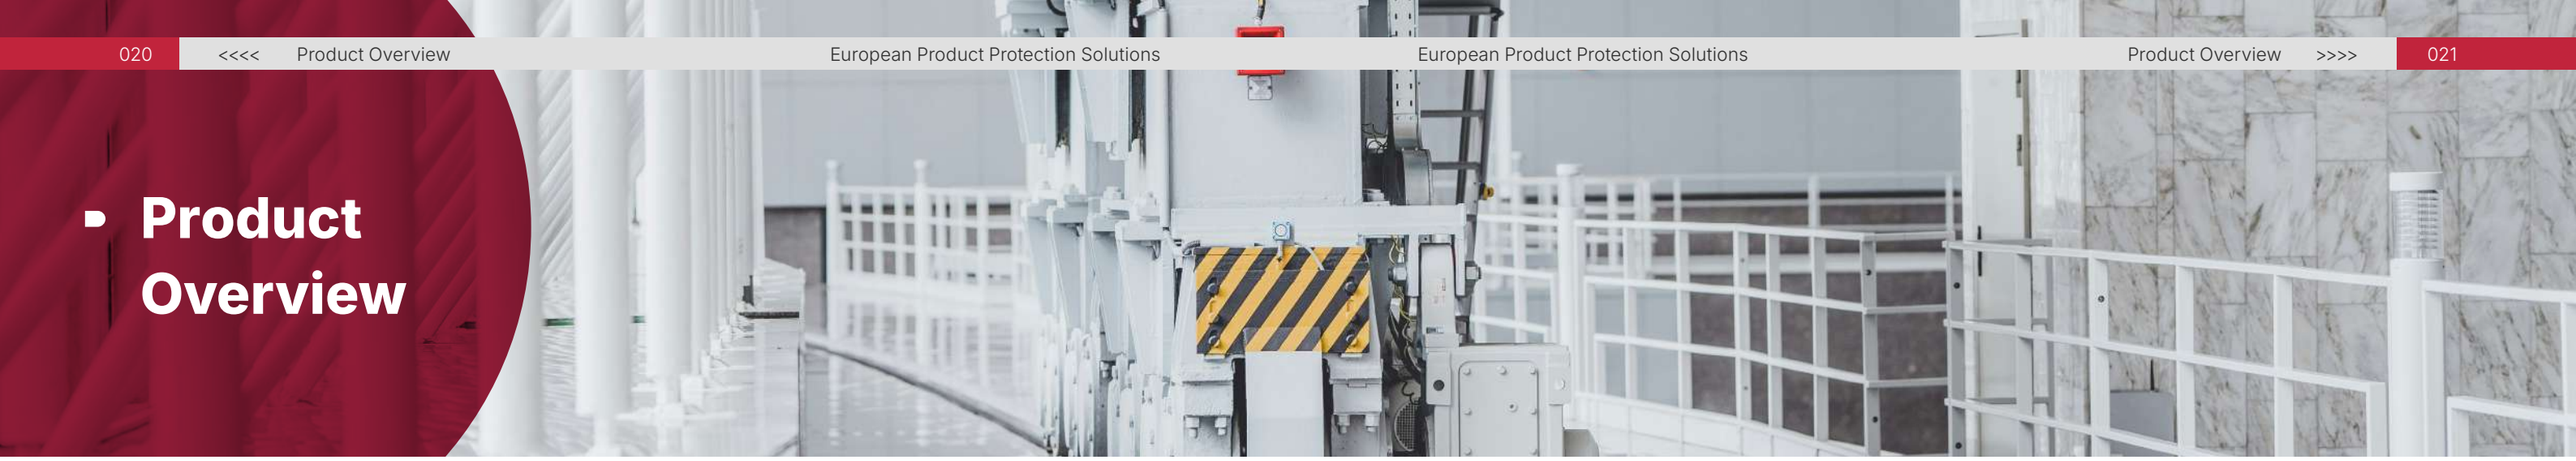

Product Overview

Packaging and Netting

Sleeve-Web® Netting

SW-Standard Series
Standard Duty Net
Page 498

SW-Light Series
Light Duty Net
Page 499

SW-Heavy Series
Heavy Duty Net
Page 500



SWI Series
Rust Inhibitor Net
Page 501



PMW Series
Flat Sheet Net
Page 502

CBW Series
Cut Bottle-Web Net
Page 503



CSW Series
Sleeve-Web® Net
Page 504



CSWF Series
Open / Closed Sleeve Net
Page 505

Pipe and Flange

Flanges

SAE Series
Centred Flange
Page 508

Non-Threaded Caps

VF Series
Flexible Flange Cap
Page 510

VSR Series
Snap Ring Cap
Page 512

K Flange Series
Precision Fitting Cap
Page 514

Non-Threaded Plugs

TLF Series
Hinged Plug
Page 516

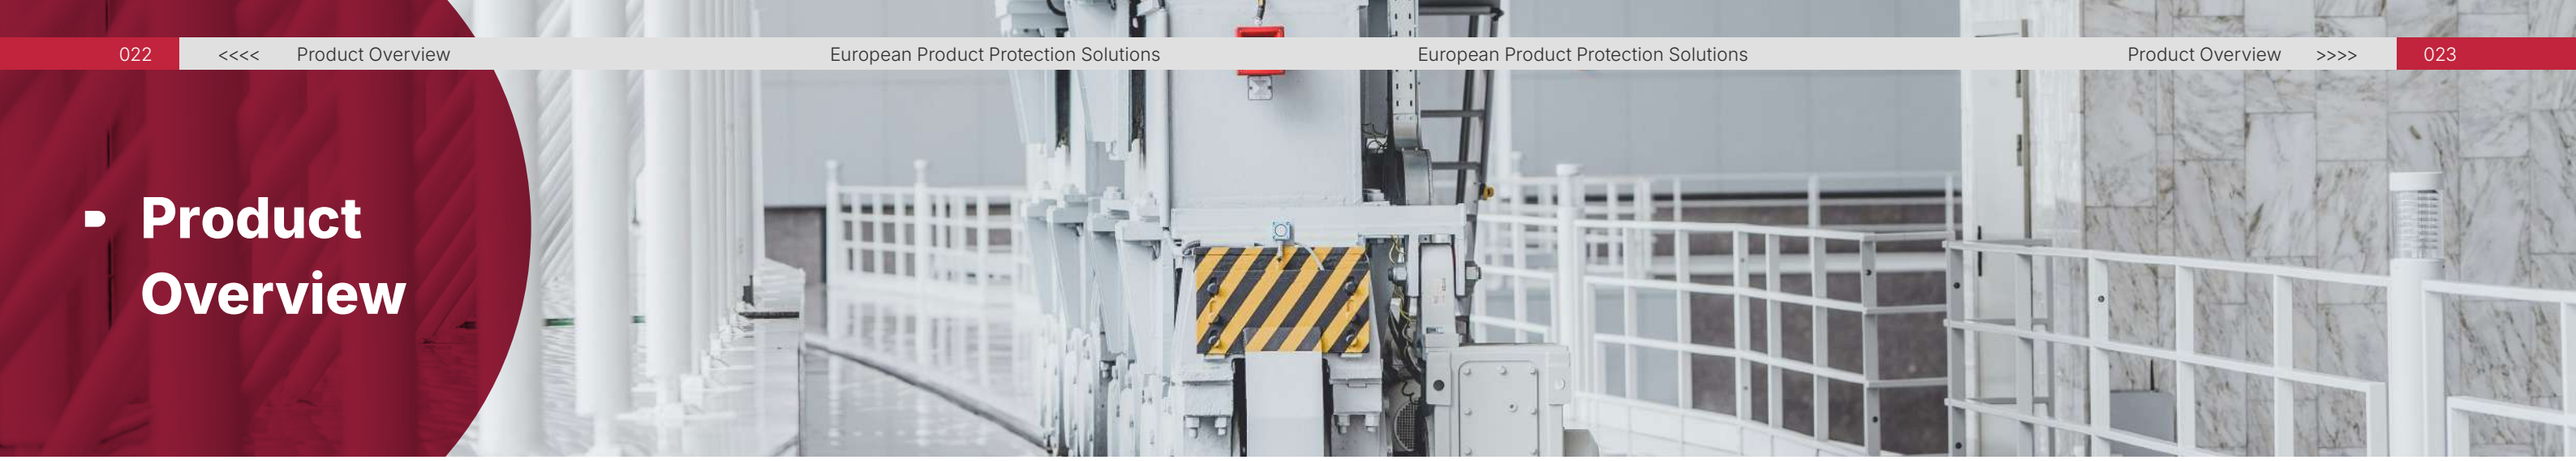

Product Overview

Spirals

Spirals

Safe-Spiral Series
Contoured Hose Wrap
Page 520

Safe-Spiral DUO Series
Dual Wrapping Spiral
Page 522

Safe-Spiral BIO Series
Reduced Environmental Footprint Spiral
Page 524

Safe-Spiral ECO Series
Recycled Spiral
Page 526

Safe-Spiral ABRA Series
Wear Indicator Spiral
Page 528

Safe-Spiral ASTA Series
Electrostatic Charge Dissipation Spiral
Page 530

Safe-Spiral MINE+ Series
Extreme Abrasion-Resistant Spiral
Page 532

Safe-Spiral 'YOUR BRAND' Series
Laser Custom Branded Spiral
Page 534

Pig's Tail™ Spiral Series
Pig's Tail Protective Wrapping
Page 536

FRAS Series
Fire Retardant Anti-Static Spiral
Page 538

Pig's Tail™ Rail Series
Rail Hose Spiral
Page 540

Metal Protection Spiral Series
Robust Spiral
Page 542

Protective Textiles

Sleeves

Safe-Sleeve NW PES
High Velocity Fluid Escape-Prevention Sleeve
Page 546

Safe-Sleeve MSHA Series
High Velocity Fluid Escape-Prevention Sleeve
Page 547

Safe-Sleeve PP Series
Stress Resistant Sleeve
Page 548

Ferrules Series
Secure Hose Fastener
Page 549

Safe-Wrap Series
Rapid-Fit Sleeve
Page 550

Safe-Fire Series
Fire-Sleeve
Page 551

Safe-Fire Series
Fire-Wrap
Page 552

Tapes

Safe-Fire Series
High Temperature Tape
Page 553

Straps and Strips

Safe-Strip Series
Hose Binding Strap
Page 554

Safe-Strip Series
Heavy-Duty Bundling Strap
Page 555

Safe-Strip Series
Hose Assembly Fastener
Page 556

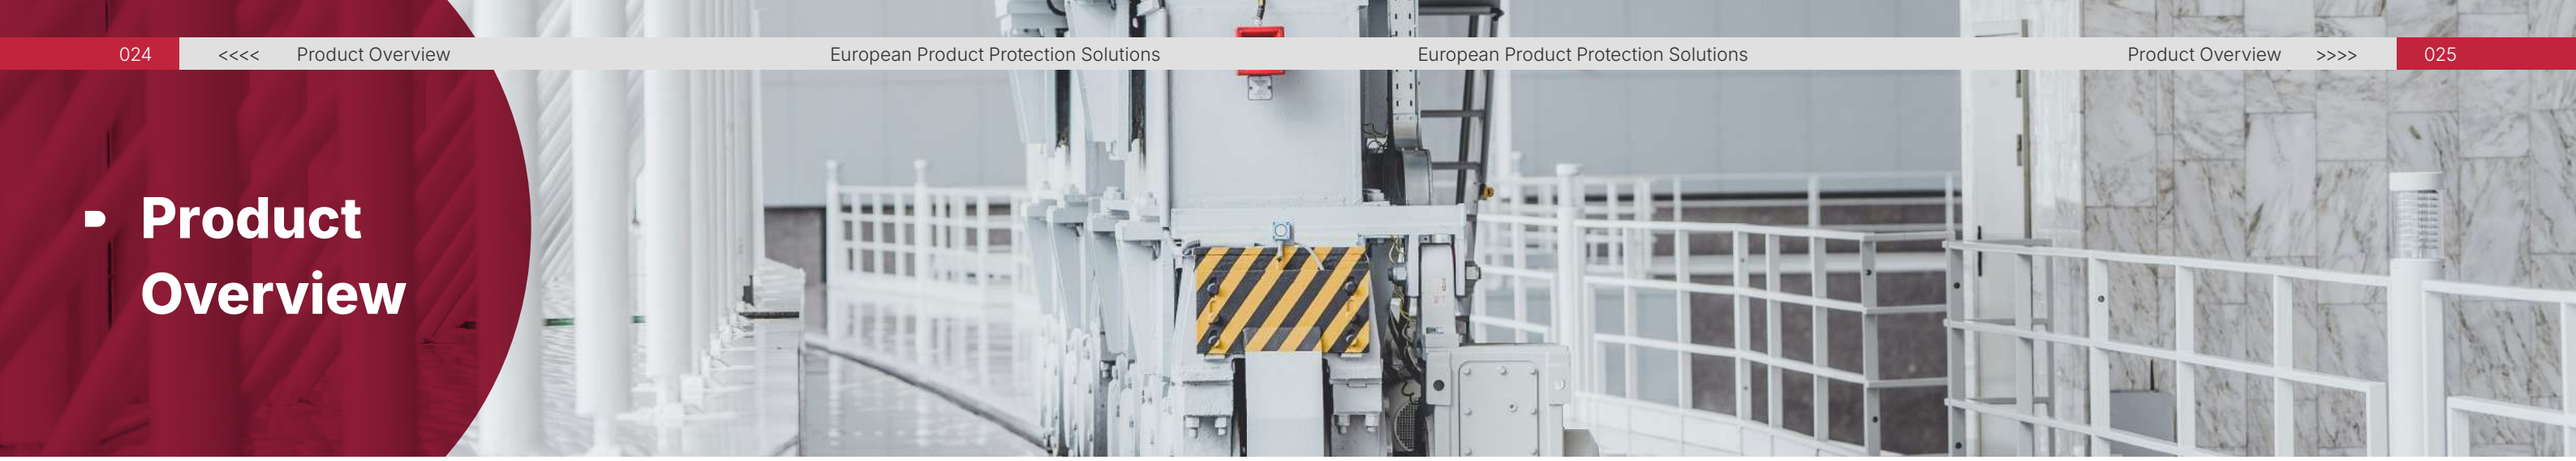

Product Overview

Accessories

Accessories

Safe-Bundler Series
Installation Tool
Page 560

Wrapman Series
Installation Tool
Page 561

Safe-Tool Series
Spiral Hose Mount
Page 562

Service Plug Series
Tapered Service Plug
Page 563

How to order with the correct part number and colour code

Where we manufacture a part in multiple colours, the colour blocks at the top of each product table show the colours we make that part in. To order one of the available colours please add the corresponding colour abbreviation from this table to the end of the part number.

For example, part number 13100324 from the K Series on page 058 is manufactured in clear, red, blue and yellow. The part number for the yellow version of that part is **13100324-YL**.

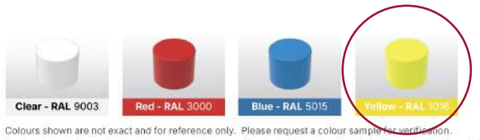

Colours shown are not exact and for reference only. Please request a colour sample for verification.
Part numbers below refer to default colour selection. Contact Caplugs for alternative or custom colour options.



*For more information visit our website: www.caplugs.eu

Part Number	Fits pipe thread	Dimensions in mm			Dimensions in inches			Packaging
		d	h	D	d	h	D	
		Inside diameter	Inside height	Outside diameter	Inside diameter	Inside height	Outside diameter	Quantity per bag
13100324		5.50	13.00	7.00	0.217	0.512	0.276	5000
13103564		5.80	13.00	8.00	0.228	0.512	0.315	5000
13111424		7.50	7.40	9.90	0.295	0.291	0.390	2500

Colour	Abbreviation
Aluminum	-AL
Amber	-AM
Beige	-BG
Black	-BK
Blue	-BL
Brown	-BN
Bronze	-BZ
Charcoal	-CH
Clear	-CL
Cream	-CM
Gold	-GD
Green	-GN
Granite	-GT
Grey	-GY
Ivory	-IV

Colour	Abbreviation
Light	-LT
Natural (no pigmentation)	-NC
Opaque	-OP
Orange	-OR
Pink	-PK
Purple	-PL
Red	-RD
Rusty Red (silicone)	-RR
Translucent	-TL
Tan	-TN
Transparent	-TP
Violet	-VT
White	-WT
Yellow	-YL

European Product Protection Solutions Manufacturing Powerhouse >>>> 027

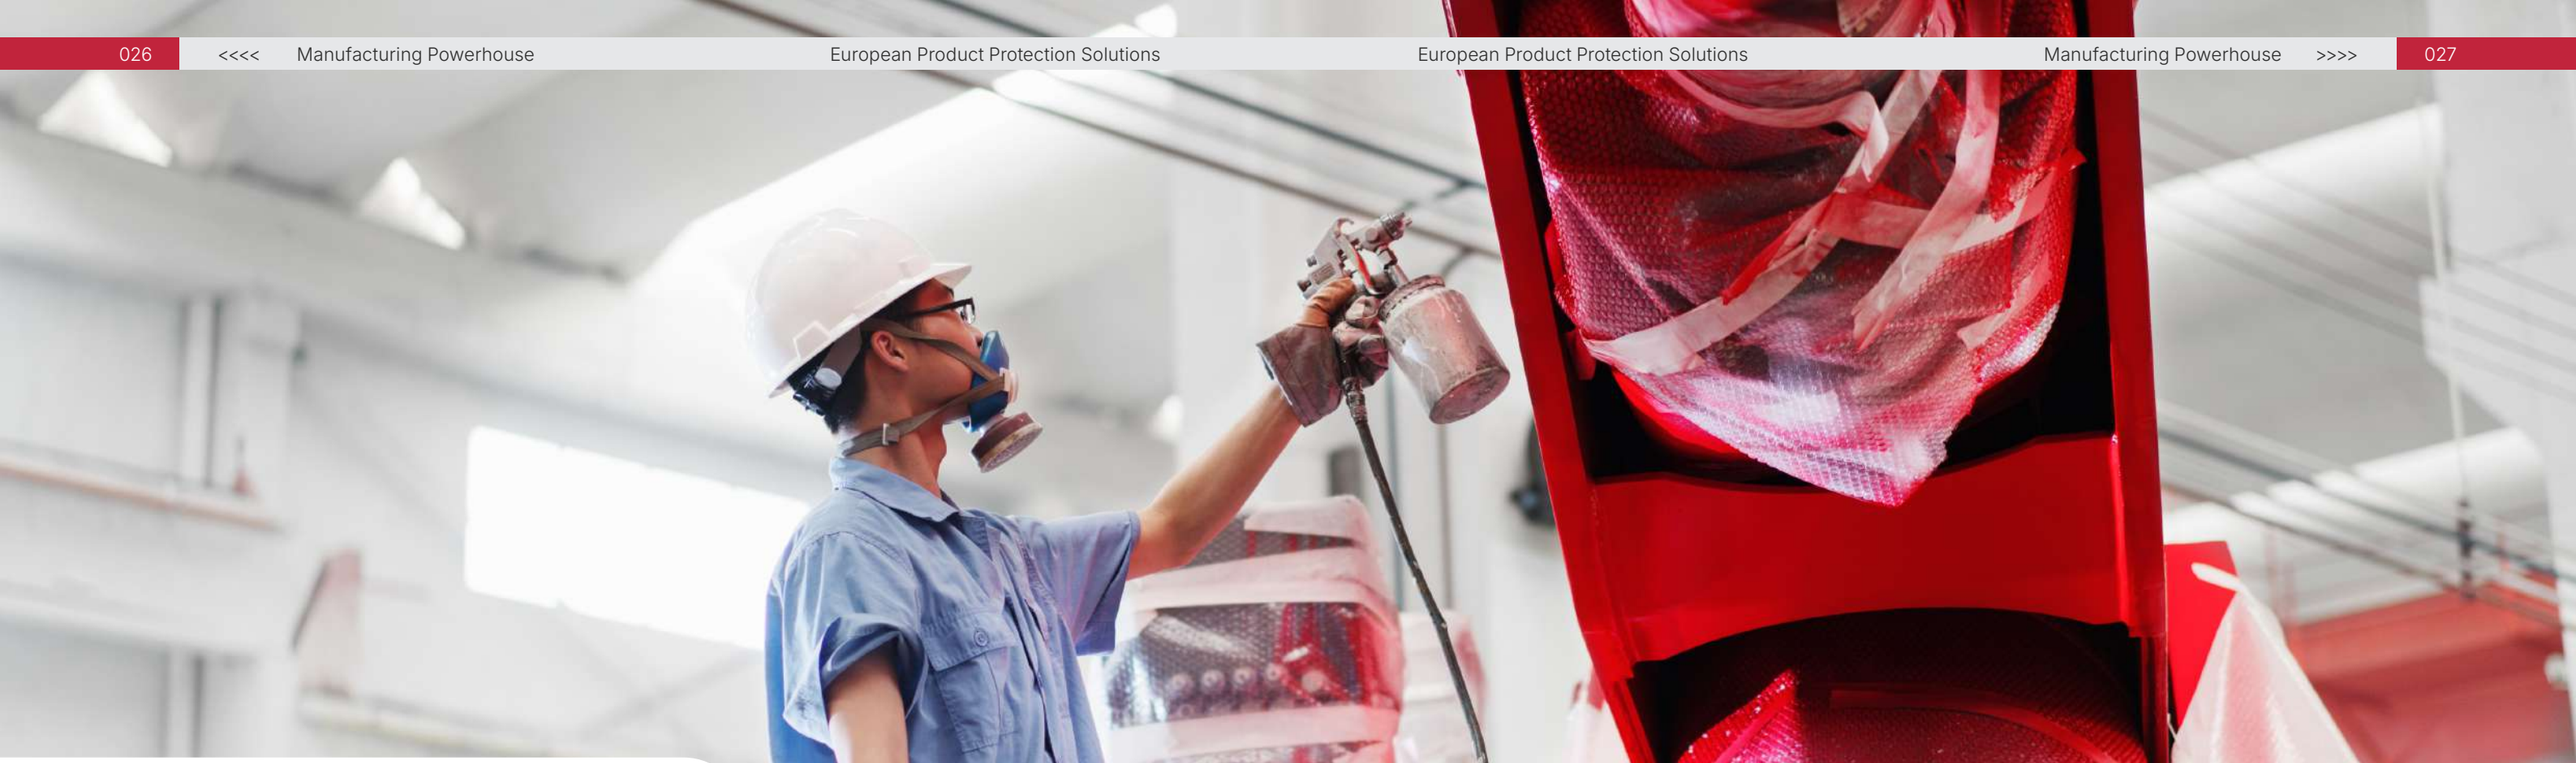

Manufacturing Powerhouse

13 Manufacturing Facilities Across the Globe

We build Caplugs catalogue and custom parts completely in-house.
Our team of engineers design each part and the tools to manufacture them.
Our in-house toolrooms build those tools. Then they work with our team of manufacturing engineers to ensure optimal performance and cycle times.

Quality You Can Trust

ISO 9001
Ensures excellence in quality management systems, enhancing customer satisfaction.

IATF 16949
Supports continual improvement and reduced variability within the automotive industry.

ISO 13485
Guarantees quality management for medical devices, ensuring compliance with stringent regulatory standards.

ISO 14001
Promotes environmental management, enabling sustainable business practices.

ISO 50001
Focuses on energy management, with objectives of increased energy efficiency and reduced costs.

Europe

Lüdenscheid, Germany
ISO 9001 / IATF 16949 / ISO 14001 / ISO 50001

Oss, The Netherlands
ISO 9001

Tampere, Finland
ISO 9001 / ISO 14001

Asia

Jintan, China
IATF 16949 / ISO 9001 / ISO 13485

North America

Buffalo, New York
ISO 9001 / IATF 16949 / ISO 13485 / ISO 14001

Houston, Texas
ISO 9001

Erie, Pennsylvania
ISO 9001 / IATF 16949 / ISO 14001

Rancho Dominquez, California
ISO 9001 / ISO 14001

Toronto, Canada
ISO 9001

Production method

Injection Moulding

Why choose injection moulding?

Caplugs injection moulding offers you:

- The most exact part tolerances
- Precision manufacturing capabilities
- Multiple machines for production scalability

The Caplugs injection moulding capability includes:

- 225 injection moulding machines - ranging from 7 to 1,000 tonnes
- Production of over 300 standard styles of injection moulded plastic parts
- Production of over 50 different series of injection moulded vinyl parts
- Interchangeable mould system for cost-effective custom solutions
- Full library of mould bases
- Quick mould changeovers for shorter lead times
- Slide and standard tools

Locations: **Lüdenscheid / Falciano / Buffalo, NY**

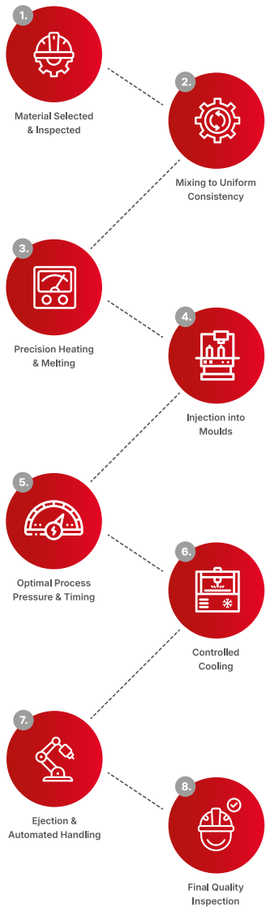

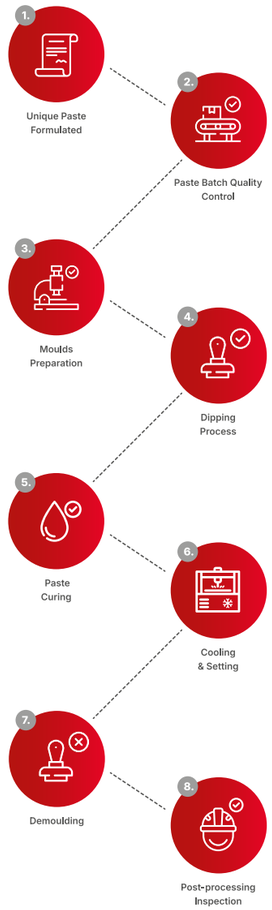

Production method

Vinyl Dip Moulding

Why choose vinyl dip moulding?

Caplugs vinyl dip moulding offers you:

- Material flexibility to accommodate numerous applications
- Creation of longer or shorter parts with the same tooling
- Low cost and rapid production

The Caplugs vinyl dip moulding capability includes:

- 25 dedicated vinyl dip moulding machines
- Quick and economical tooling changes
- Same tool usage for a variety of lengths
- Range of material additives – temperature resistant, UV stable, photoluminescent and more
- Caplugs Europe own-mixed plastisol - phthalate free
- Choice of most appropriate durometer for your specific application
- Large tooling library

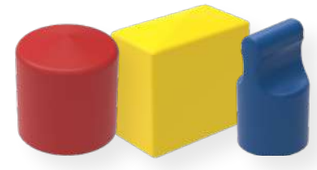

Locations: **Oss / Buffalo, NY**

Production method

Vinyl Dip Coating

Why choose vinyl dip coating?

Caplugs vinyl dip coating offers you:

- Durable protection or enhancement of metal parts
- Adding of colouration or branding to products
- Simple and affordable alternatives to injection moulded solutions

The Caplugs vinyl dip coating capability includes:

- Permanent, ergonomic and protective coating
- Dipping of most metal components
- Convenient process – you ship us your parts, we dip and return the finished products to you

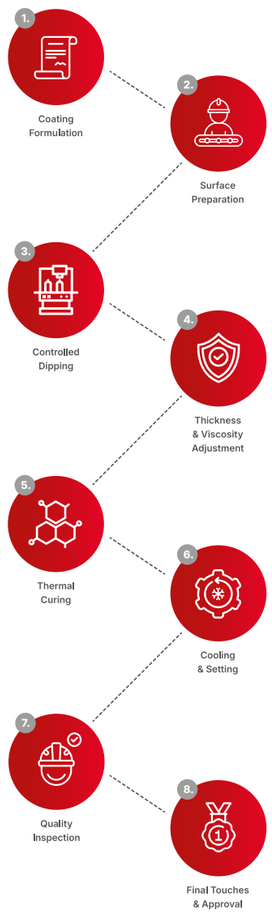

Locations: **Oss**

Production method

Rubber Moulding

Why choose custom rubber moulding?

Caplugs custom rubber moulding offers you:

- Superior and consistent high performance quality parts
- Custom part design and manufacturing
- Accurate production to exact specifications
- Expert engineering team support from concept through production to delivery
- Dedicated production facility

The Caplugs custom rubber moulding capability includes:

- Custom part design and manufacturing
- Rapid prototyping
- Local engineering support
- In-house mixing, compounding and tooling
- Custom compounds for specific feature and colour requirements
- IATF 16949 and ISO 9001 certification to meet stringent standards
- Compression moulding and injection moulding available
- Transfer moulding capabilities
- Production in wholly owned and controlled Caplugs facility in China

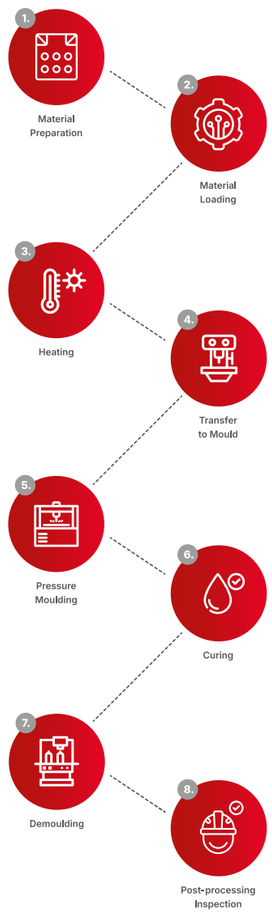

Materials	**Silicone**	**Nitrile (Buna-N)**	**Polyisoprene**
	EPDM	**Natural Rubber**	**Fluorosilicone**
	Neoprene	**Butyl**	**HNBR**
	SBR (Buna-S)	**Viton**	

Locations: **Jintan**

Production method

Die-Cutting

Why choose die-cutting?

Caplugs die-cutting offers you:

- No need for tooling
- Consistent pre-made masking
- Cutting to your exact size and shape requirements
- Low costs
- Increased masking speed and accuracy

The Caplugs die-cutting capability includes:

- Tooling-free design direct from jpg, pdf, CAD or SolidWorks files
- Range of standard materials choices, including magnetic, 2-ply foam, adhesive-backed, and thick-rigid
- Three die-cut processes: flash cutter, plotter and rotary
- Stock of most common use shapes and sizes across industries
- Customised shapes and tear-tab designs to ease residue-free removal
- Customised kit designs for multi-mask projects – ideal for use with automotive and aviation components

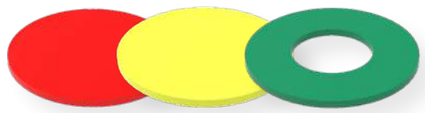

Locations: **Falciano / Erie, PA / Brisbane**

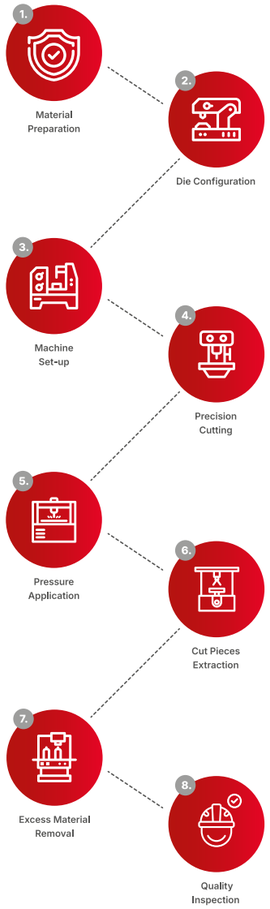

Production method

Extrusion

Why choose extrusion?

Caplugs extrusion offers you:

- Affordable and durable production of containers and packaging
- Availability in a range of colour, length and width options
- Pairing with vinyl dip moulding or injection moulding for complete packaging solutions specific to your product

The Caplugs extrusion capability includes:

- Range of different extruders
- Quick and economical tooling
- On-line fly-knife and planetary cutters for different cut types
- Cutting to any length
- Flexible tooling platforms
- Production of profile extrusions - tubes, netting, edge liners and wraps

Locations: **Tampere / Buffalo, NY / Brisbane**

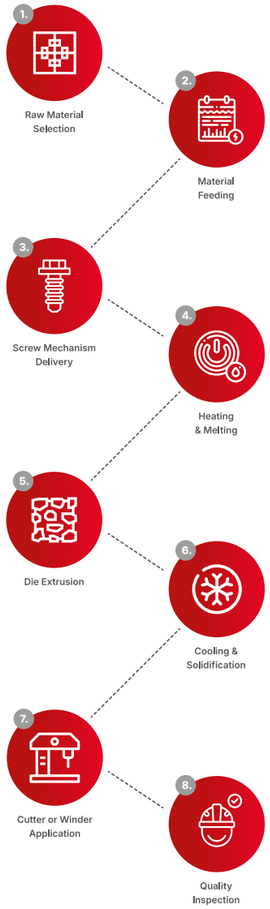

Production method

Netting

Why choose netting?

Why choose netting from Caplugs?

- Affordable and durable production of protective packaging
- Availability in a range of colour, length and width options
- Flexibility with dies designed to produce netting or webbing

The Caplugs netting production capability includes:

- Range of different extruders
- Quick and economical tooling
- Cutting to any length
- Flexible tooling platforms
- Production of netting or webbing

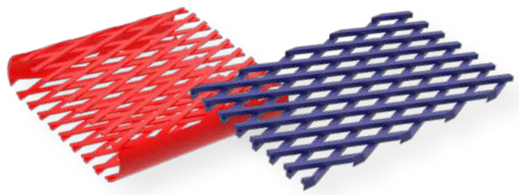

Locations: **Buffalo, NY**

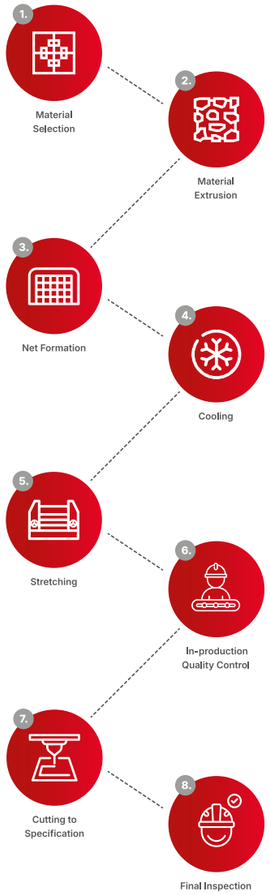

Production method

Catalogue Parts Modification

Why choose Caplugs catalogue parts modification?

Caplugs catalogue parts modification offers you:

- Highly adaptable and flexible customisation of standard parts
- Meeting of exact needs
- Wide range of materials options
- Materials additives for enhanced performance
- Colour matching
- Fulfilment of special packaging requirements

The Caplugs parts modification capability includes:

- Precision cutting to specific dimensions
- Parts slicing for fittings
- Adding of holes with punch-outs
- Pad printing of logos or directions directly onto parts
- Assembly of component parts

Locations: **Tampere, Lüdenscheid, Oss, Jintan**

We Make
Customisation Easy

More than half of all Caplugs products purchased are custom designs. Whether a customer brings us their design to build the tool, or they need our team of specialists to first design the part and then build the tool, we make customisation easy.

Use our team's vast tooling and plastic moulding experience to make sure any part design will mould well, achieve consistent quality, and meet the exact specifications and tolerances your project demands.

You may be looking for design help, material recommendations or fulfilment of special packaging needs, or perhaps you have other customisation requirements. Whatever the specific need, you will find our service is tailor-made to deliver custom solutions.

- Unrivalled experience in plastic moulding
- Hundreds of material options
- 6 different manufacturing processes
- Mould maintenance and storage

European Product Protection Solutions Ordering Samples >>>> 039

Our Caplugs
FREE Sample Service

At Caplugs, we believe in providing our customers with every opportunity to thoroughly test our products before deciding to purchase. That is why we offer free samples right across our range, allowing you to evaluate multiple sizes and designs in practice and at no cost. We have designed the service specifically to help you find the perfect solution for your needs, easily and with complete confidence.

Requesting Samples

You can request a sample via any of our channels:

Via Our Website: Access our full catalogue online and use the sample request feature available on each product page.

Directly Through a Caplugs Sales Representative: Contact your dedicated sales representative who will be delighted to help select the right samples for your requirements.

By Email: Contact our customer service team by email with details of your sample requirements.

By Telephone: Call our customer service desk to discuss your needs and request samples directly.

Each method is user-friendly and efficient, ensuring easy and seamless process from request to receipt.

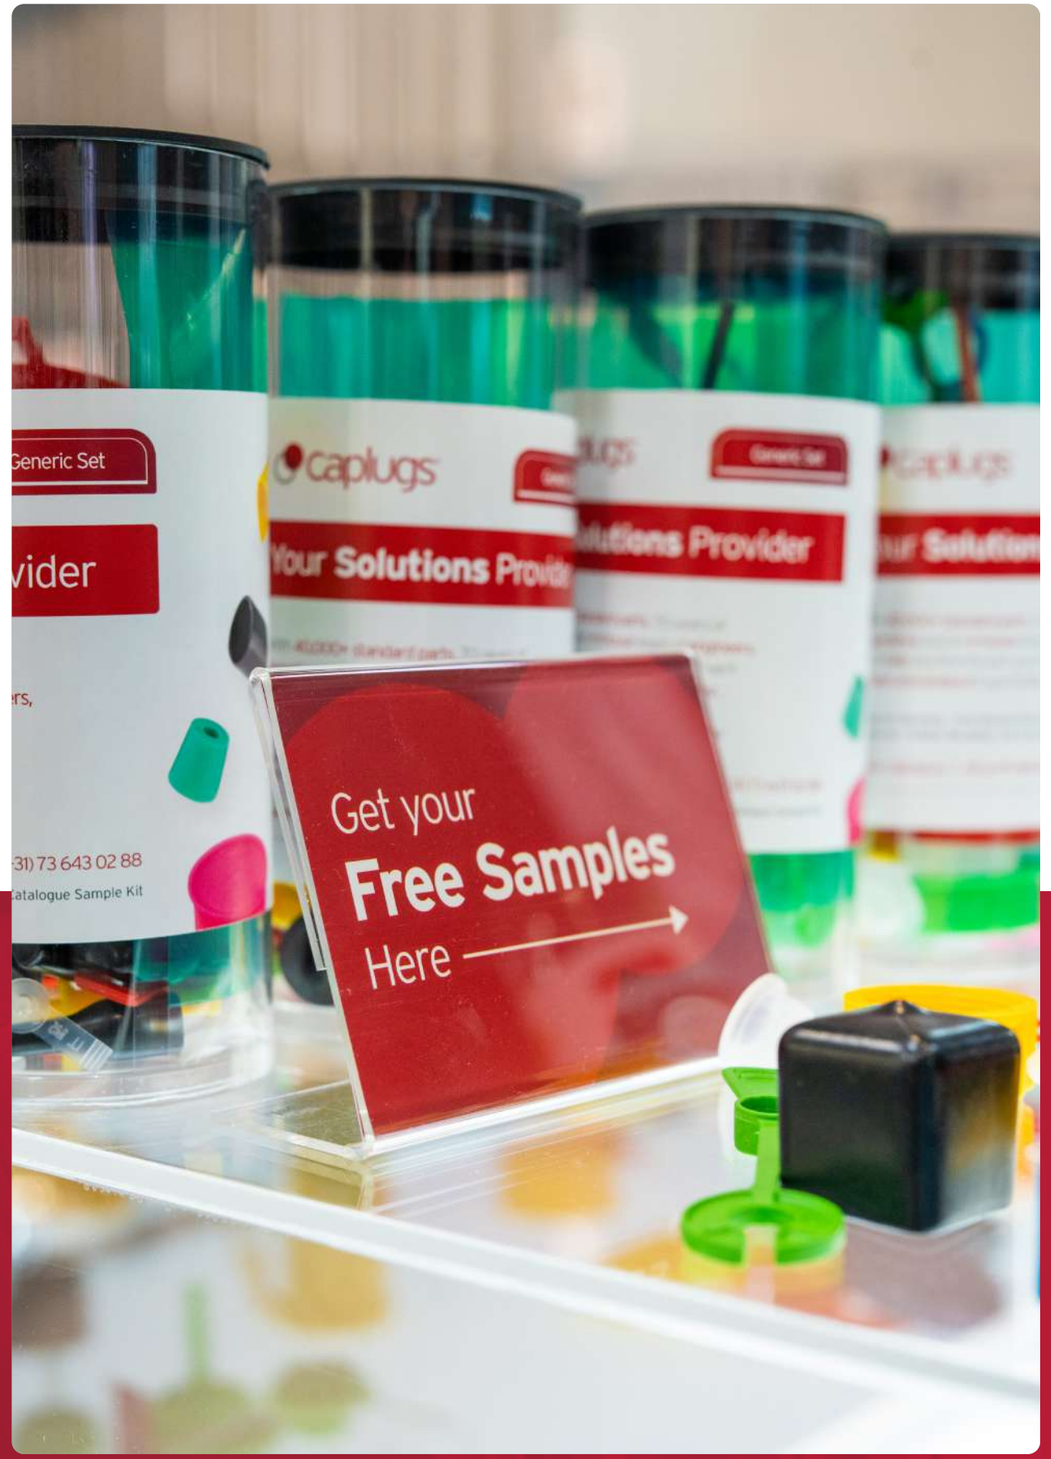

Requesting Samples

When we receive your sample request, this is how we handle it internally:

Selection and Picking: Our warehouse team carefully selects and prepares the requested samples from our extensive stock.

Dispatch: We promptly send out the samples, aiming for quick delivery to allow you to begin testing without delay.

Frequently Asked Questions About Our Sample Process

- **How many samples can I request at one time?**
  You will receive up to three samples per size to thoroughly evaluate their suitability for your project(s).
  For additional samples, or to assess multiple sizes, further requests can be accommodated.

- **Are there any costs involved with requesting samples?**
  Samples are provided at no charge to the customer, this includes shipping.

- **Can I request a sample of any product from your catalogue?**
  Samples are available for every product listed in our catalogue.

- **How long will it take to receive my samples once requested?**
  Samples are typically dispatched within 48 hours of your request and should arrive within a few working days,

- **What should I do if the samples I receive do not meet my needs?**
  Should the samples not meet your specifications, please contact us to explore alternative options, or to discuss the development of a custom solution.

- **Is it possible to request custom samples of products not listed in your standard catalogue?**
  Custom samples based on your specific project specifications cannot be supplied on our standard products basis. Please contact us to discuss your particular requirements.

- **How can I give feedback on the samples I test?**
  Feedback may be provided directly to your sales representative or by contacting our customer service team via email or telephone.

- **What happens if I need a larger quantity of samples for extensive testing?**
  Requests for larger quantities of samples can be fulfilled. Please discuss your needs with our customer service team.

- **Can I speak with an engineer or technical specialist about specific sample applications?**
  Our engineers and technical specialists are available to provide support and address any technical questions about our products.

- **What are my options if, due to project deadlines, I need faster delivery for samples?**
  Expedited shipping options are available for urgent sample requests. Please mention your faster delivery requirements when you place your sample order.

Need More Information?

If you have additional questions, or need further assistance with your sample requests, please do not hesitate to contact us. Our team is ready and waiting to assist you in finding the right solutions for your projects.

Order Your Samples Today

Ready to request your samples or need specific advice? **Call us at +31 73 643 02 88** to speak directly with one of our specialists. We are here to make sure you have precisely the market leading protection products you need, to move your projects forward with total confidence.

European Product Protection Solutions

Markets Served

For 75 years, customers across many industries have made Caplugs their trusted supplier. We apply our experience to make the parts selection and purchasing process easy for them.

We use our expertise not just to listen to what our customers need, but to offer recommendations for products and materials that may perform better for a specific application. Different design features and material options allow us to support our customers with efficient part installation and removal. And we can provide value-added features such as sound dampening or sealing properties.

- Automotive
- Agriculture
- Electronics
- Aviation/Aerospace
- Metal Fabrication
- Hydraulics
- Industrial Machinery
- Medical
- Packaging

Automotive Market

Caplugs automotive industry-specific products protect key components, enhance process efficiencies, and keep pace with the demands of continuously evolving design.

- **Protective Caps and Plugs**
  Essential for safeguarding engine and chassis components during handling and shipping.
- **High-Temperature Masks**
  Critical for precise protection of non-coated areas in painting and coating processes.
- **Custom Moulded Components**
  Purpose-designed to shield contours and specifications of EV and autonomous vehicle components.

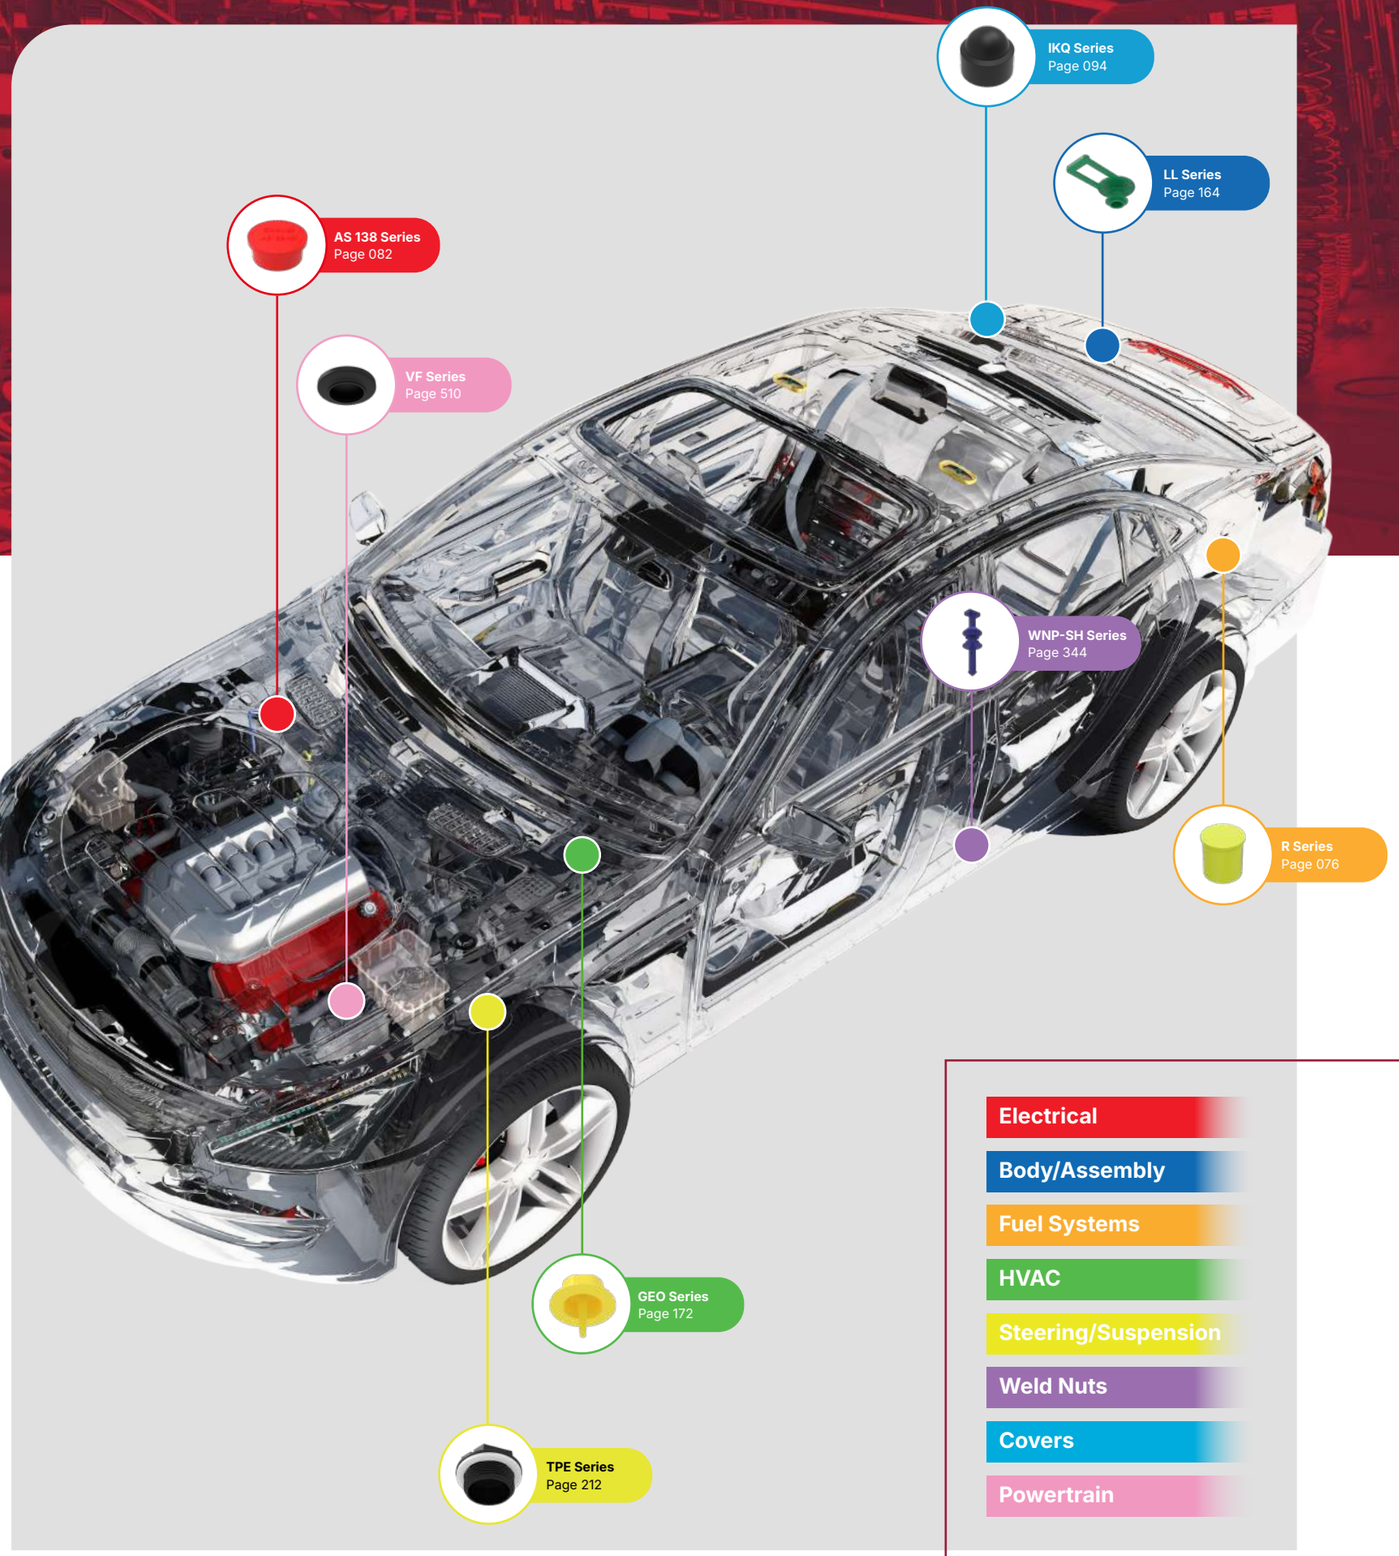

The Automotive Industry – Driving Your Business Forward

Specific Solutions

Caplugs supports automotive manufacturers in these critical areas.

Protection

We provide component protection when shipping, from tier to assembly. We have designed a broad selection of parts to cushion delicate threads, secure open ports from debris and contaminants, and shield machined parts from impact damage and scratching.

Body Sealing and Finishing

We offer a wide range of sheet metal plugs for use in all areas of the vehicle. Some incorporate high visibility, while others are designed to seal the cabin, withstanding harsh environments and heat.

Functional Components

We supply parts that stay on the vehicle and provide some type of functionality, such as isolator grommets and heat shield boots. Alternatively, these components can be used as protection and installation guides to ensure assembly is carried out correctly, without damaging adjacent areas of the vehicle.

Masking Solutions

We manufacture a variety of caps, plugs, tapes and discs to secure critical areas during powder coating, plating, e-coating and more. We have designed our line of masking products to endure the harsh environments of chemical processing and high temperature curing ovens, ensuring there is no bleed or leakage.

Agriculture Market

Caplugs provides a full range of parts to protect the hydraulic and pneumatic components and fittings vital for reliable performance of modern agricultural equipment.

Solutions for all your hydraulic protection needs include:

- Industry-leading protection of delicate threads during shipment and storage and guarding of ports against contamination.
- Masking of component areas - with high precision - during finishing processes.
- Custom moulded components for specific applications.

The Agriculture Industry - Overview

Caplugs is a long-time partner of agricultural and forestry equipment OEMs and suppliers. We deliver a wide range of solutions to aid in seamless manufacturing, from FOD protection and transport solutions to masking, finishing and functional components. Put our expertise to work for you.

Hose Protection

Caplugs' range of hose guard and hose bend restrictors ensures hydraulic, pneumatic and high-pressure hoses stay protected, even while operating in the most demanding environments.

Fitting Protection

Seal effectively against contaminants and protect delicate threads with Caplugs' comprehensive range of plastic caps and plugs.

Pipe Caps and Flange Covers

Caplugs' pipe caps and flange covers protect delicate pipe threads and flange surfaces during shipment and storage.

Masking

A wide choice of masking devices includes caps, plugs, tapes and discs. Caplugs' masking products are available in a variety of materials, from silicone and Flex500® to polyethylene and standard vinyl.

Custom Designs

Caplugs' design engineering team works with you directly from part design and prototyping to production and packaging. We can offer a variety of solutions to cost effectively provide the part you need.

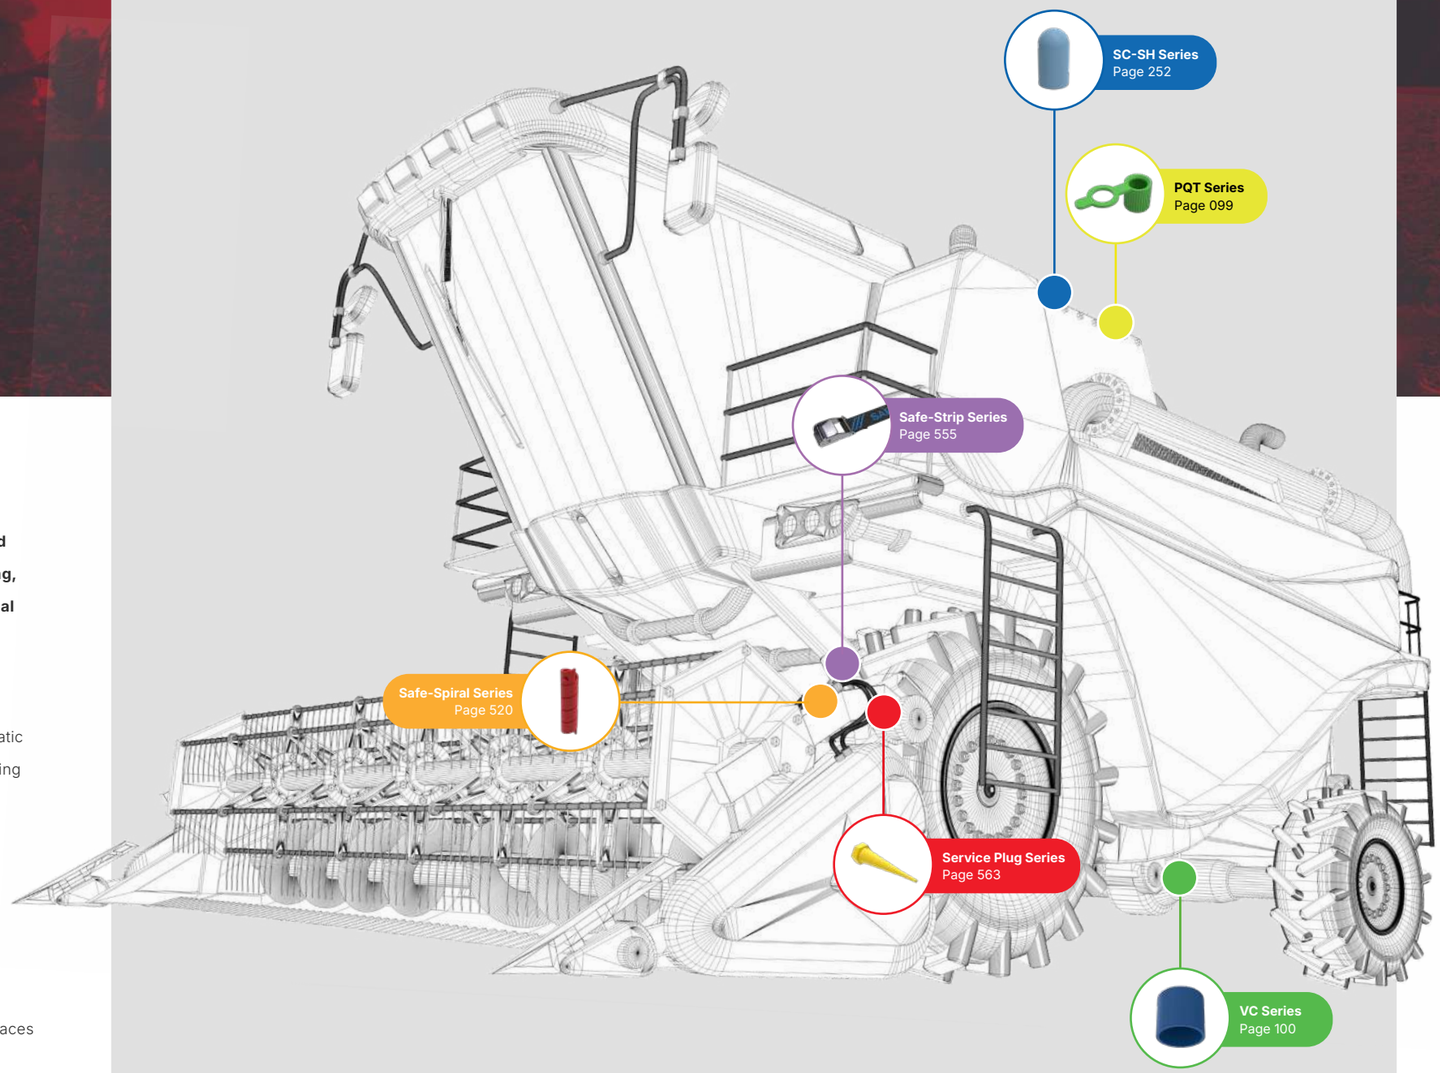

Hydraulic Systems
Lubrication Systems
Engine Components
Hose Assemblies
Hydraulic Hoses
Transmission and Drive

Electronics Industry

Caplugs electronics industry-specific products safeguard sensitive components from static, dust, and mechanical damage, ensuring flawless functionality from production to final assembly.

- **Anti-Static Caps and Plugs**
  Purpose designed to fit over connectors and endpoints and provide a secure barrier against electrostatic and environmental hazards.
- **Protective Tapes and Films**
  Applied to cover and shield board-level components during processing and handling, preventing damage without leaving residue.
- **Custom Moulded Solutions**
  Tailored to specific electronic applications to offer precision fit and protection, enhancing product durability and reliability during critical operations.

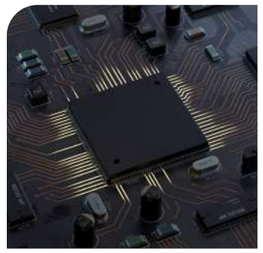

The Electronics Industry - Overview

Constant innovation demands precise, reliable, and sustained performance of sensitive components against stringent standards.

Specific Solutions

Caplugs supports manufacturers in three critical areas.

Static Protection

Our anti-static and static-dissipative products prevent electrostatic discharge (ESD) damage, providing critical protection where electronic components are handled and assembled.

Dust and Particle Protection

Our caps, plugs, and covers protect components from particulate contamination during manufacturing, storage, or transport, maintaining the necessary cleanliness for optimal electronic functionality.

Mechanical Protection

Our robust protective solutions shield delicate components from physical impacts and vibrations during handling and shipping, preserving integrity and operational readiness.

Engineered for Electronics

Our specialised protective products leverage deep knowledge of the electronic industry's technical challenges and performance standards. We innovate continuously to enhance the safety and efficiency of manufacturing processes.

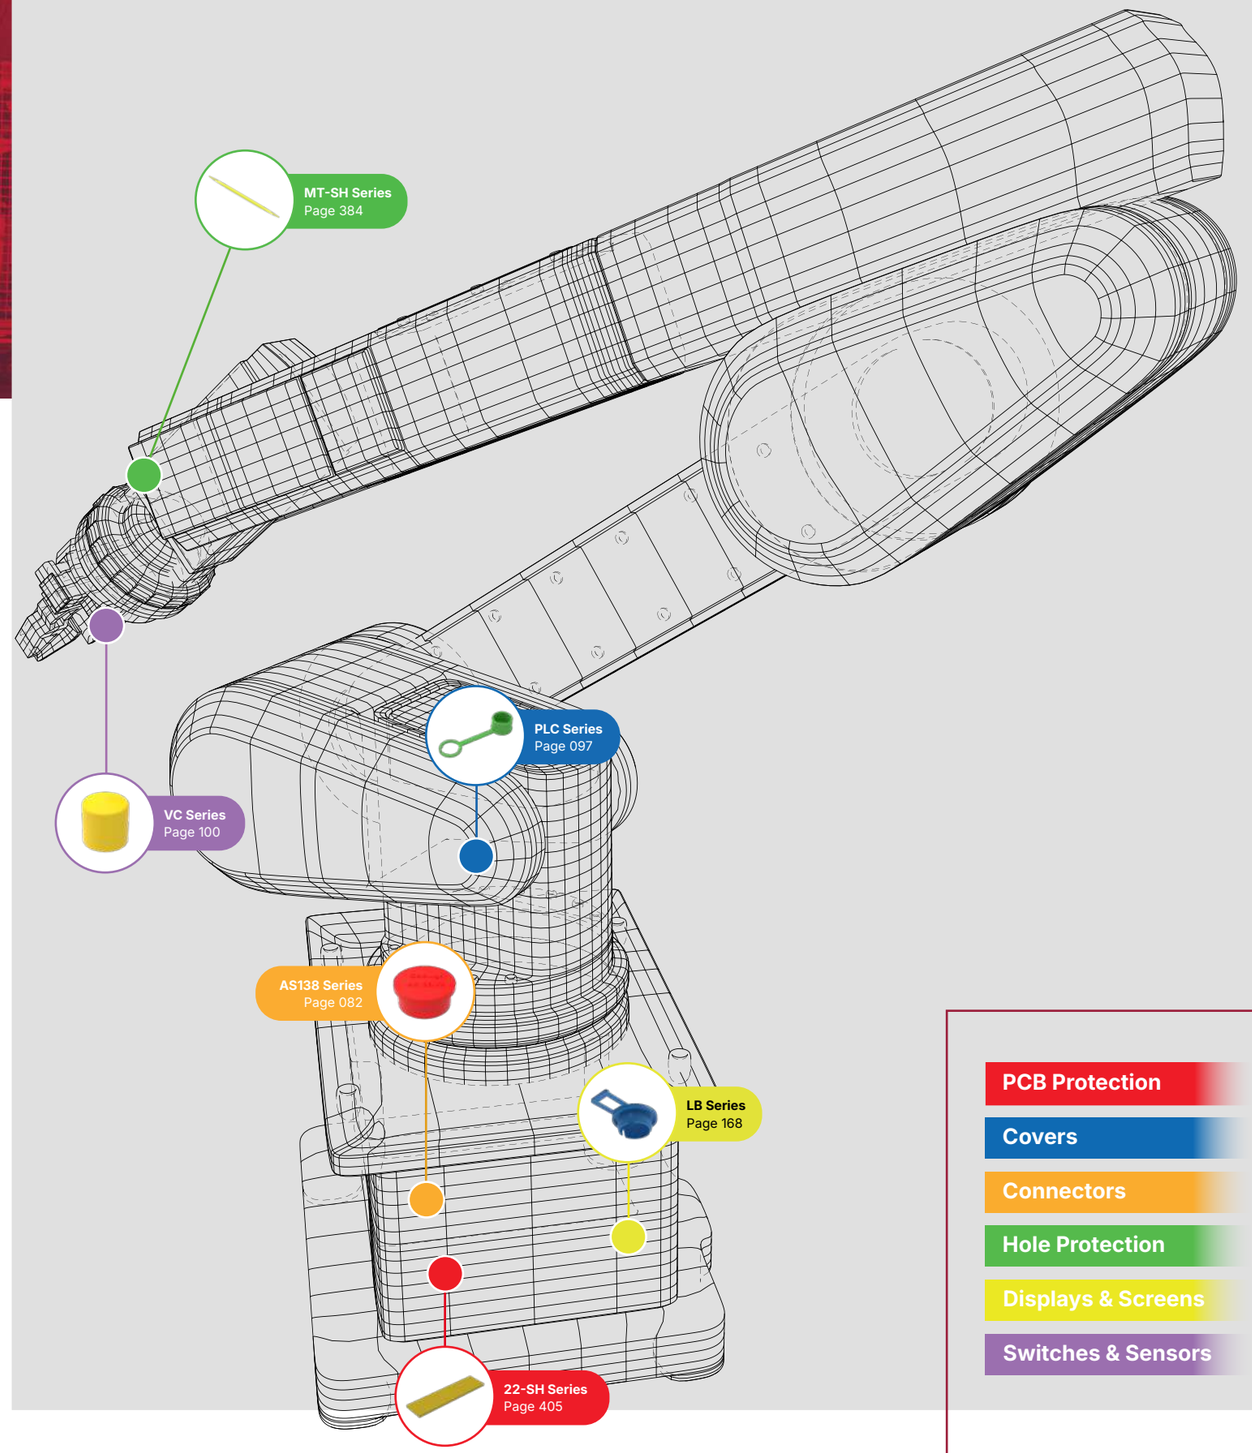

PCB Protection
Covers
Connectors
Hole Protection
Displays & Screens
Switches & Sensors

European Product Protection Solutions

Aviation and Aerospace Market

We are a trusted supplier because we understand the industry's unique demands and we have the expertise and global reach to meet them. Caplugs parts satisfy current MIL/NAS specifications to safeguard vital components from impact and FOD during shipment, storage, assembly, repair, refurbishment and finishing processes.

- **Protective Parts**
  Caps, Plugs, Netting, Moulded Components
- **Masking Products**
  High-Temperature Caps and Plugs, Tapes and Discs, Custom Die-Cuts
- **Hydraulic Protection**
  Rubber Seals, Valve and Fitting Protection
- **Electronic/Avionics Protection**
  Conductive, Static Dissipative, Non-Sloughing
- **Parts Modification**
  Cut-to-Size, Slice, Punch-Out Die-Cuts, Pad Print Message on Part

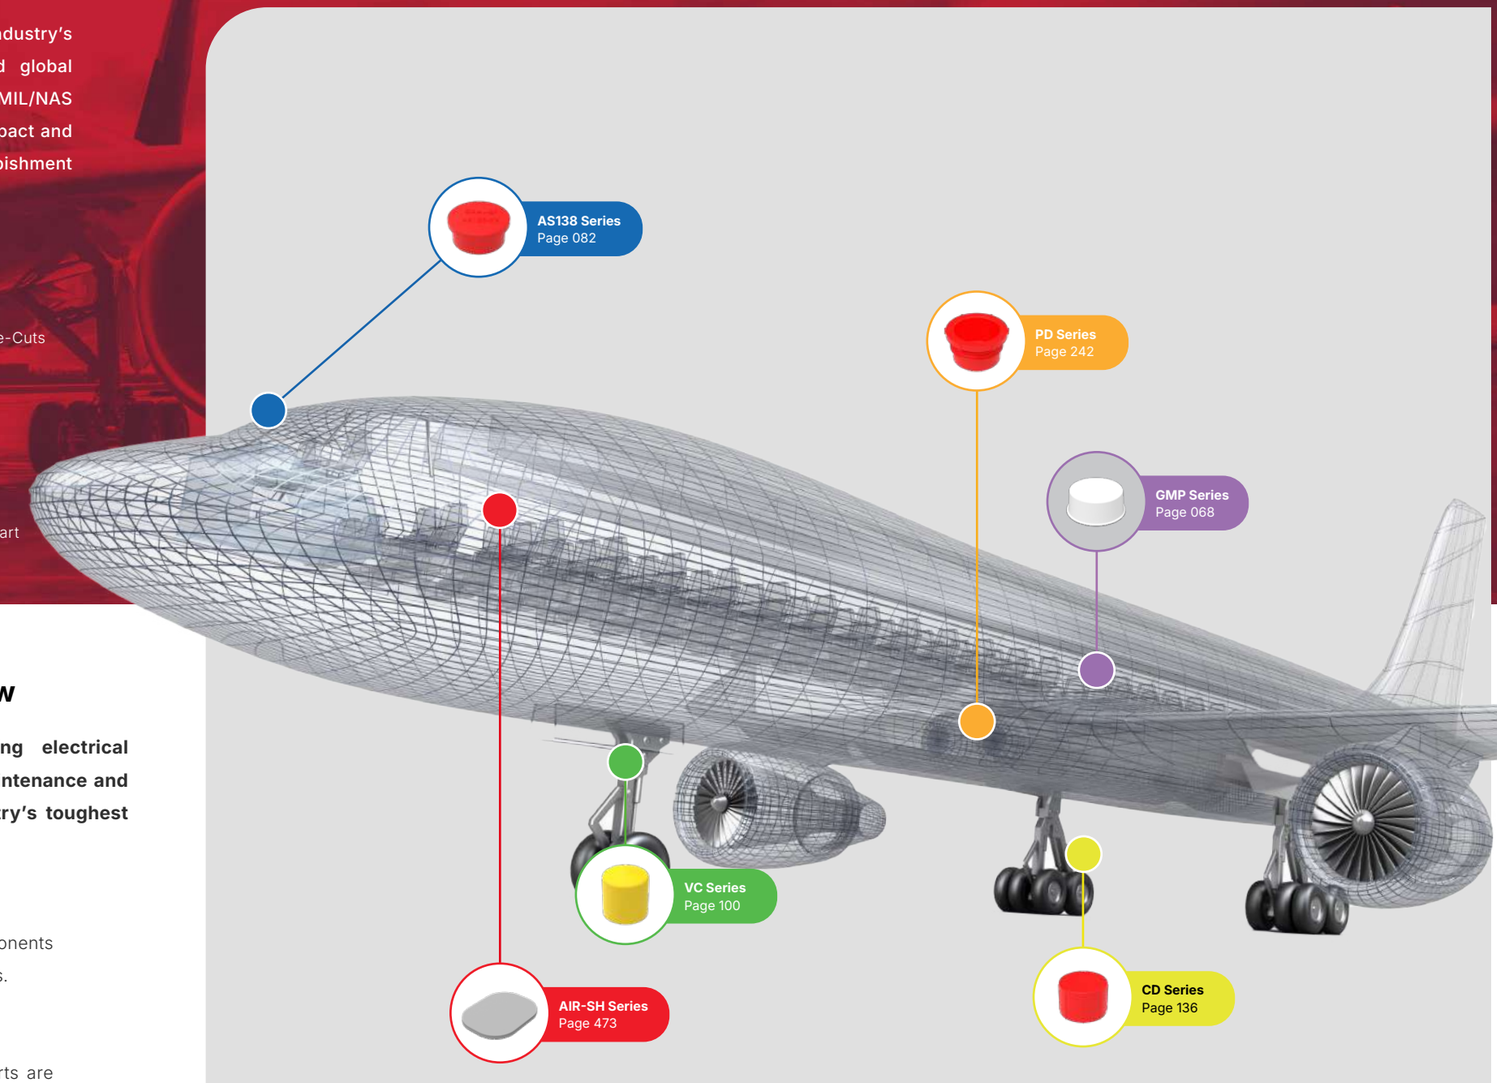

The Aerospace Industry – Overview

From concealing access panels and protecting electrical connections, to masking windows during fleet maintenance and repair, Caplugs' parts meet the aerospace industry's toughest challenges at every stage.

FOD Protection

Our parts play a key role in ensuring your critical components are not impacted or damaged by foreign objects or debris.

Product Protection

From work cell to work cell, facility to facility, your parts are protected from damage or contamination during every stage of production, storage and shipping.

Masking

Our wide range of parts are manufactured to withstand harsh environments during plating, painting, powder coating, shot peening and other finishing processes.

A Trusted Partner on the Ground

Our range of solutions, moulding capabilities, consistent quality and responsive service have made Caplugs the ideal partner and trusted source for all your component needs. We have served the industry for over 75 years, partnering with over 1,000 customers and nearly all the top 20 OEMs/suppliers.

- Aircraft Windows
- Electrical Connectors
- Tubes & Pipes
- Masking & Coatings
- Landing Gear
- FOD Protection

Metal Fabrication

Caplugs metal fabrication market-specific products protect components from damage during handling, processing, and transportation, maintaining structural integrity and appearance.

- **Protective End Protection Caps**
  Designed to fit snugly over the ends of rods, pipes, and tubes, safeguarding against damage and contamination.
- **Protective Sleeves for Long Products**
  Ideal for protecting elongated metal parts, including rods and shafts, to prevent surface damage during storage and transit.
- **Flange Covers**
  Shielding from dirt, dust, and impact during shipping and handling, to maintain assembly-readiness with no additional cleaning or repair.

The Metal Fabrication Industry - Overview

Protection and precision remain crucially important, in an industry where finished product quality directly impacts individual component integrity and customer satisfaction.

Specific Solutions

Caplugs supports manufacturers in three critical areas.

Surface Protection

Our solutions - caps, plugs and tapes - protect surfaces from scratches, dents, and other damage during fabrication and are crucial for maintaining metal parts' finish quality.

Thread Edge and Open Port Protection

Our caps and plugs are critical in guarding threaded parts and sharp edges from in-fabrication damage. This protection is also vital to preventing injury and preserving component functionality.

Custom Fit Solutions

For diverse projects, custom-designed protection ensures a precise fit, regardless of shape or size, for comprehensive protection of complex geometry parts.

In The Best Shape to Protect

We understand the critical importance of component integrity and we innovate to provide solutions that best enhance safety and efficiency in metal fabrication workshops. Whatever the shape and size of the project.

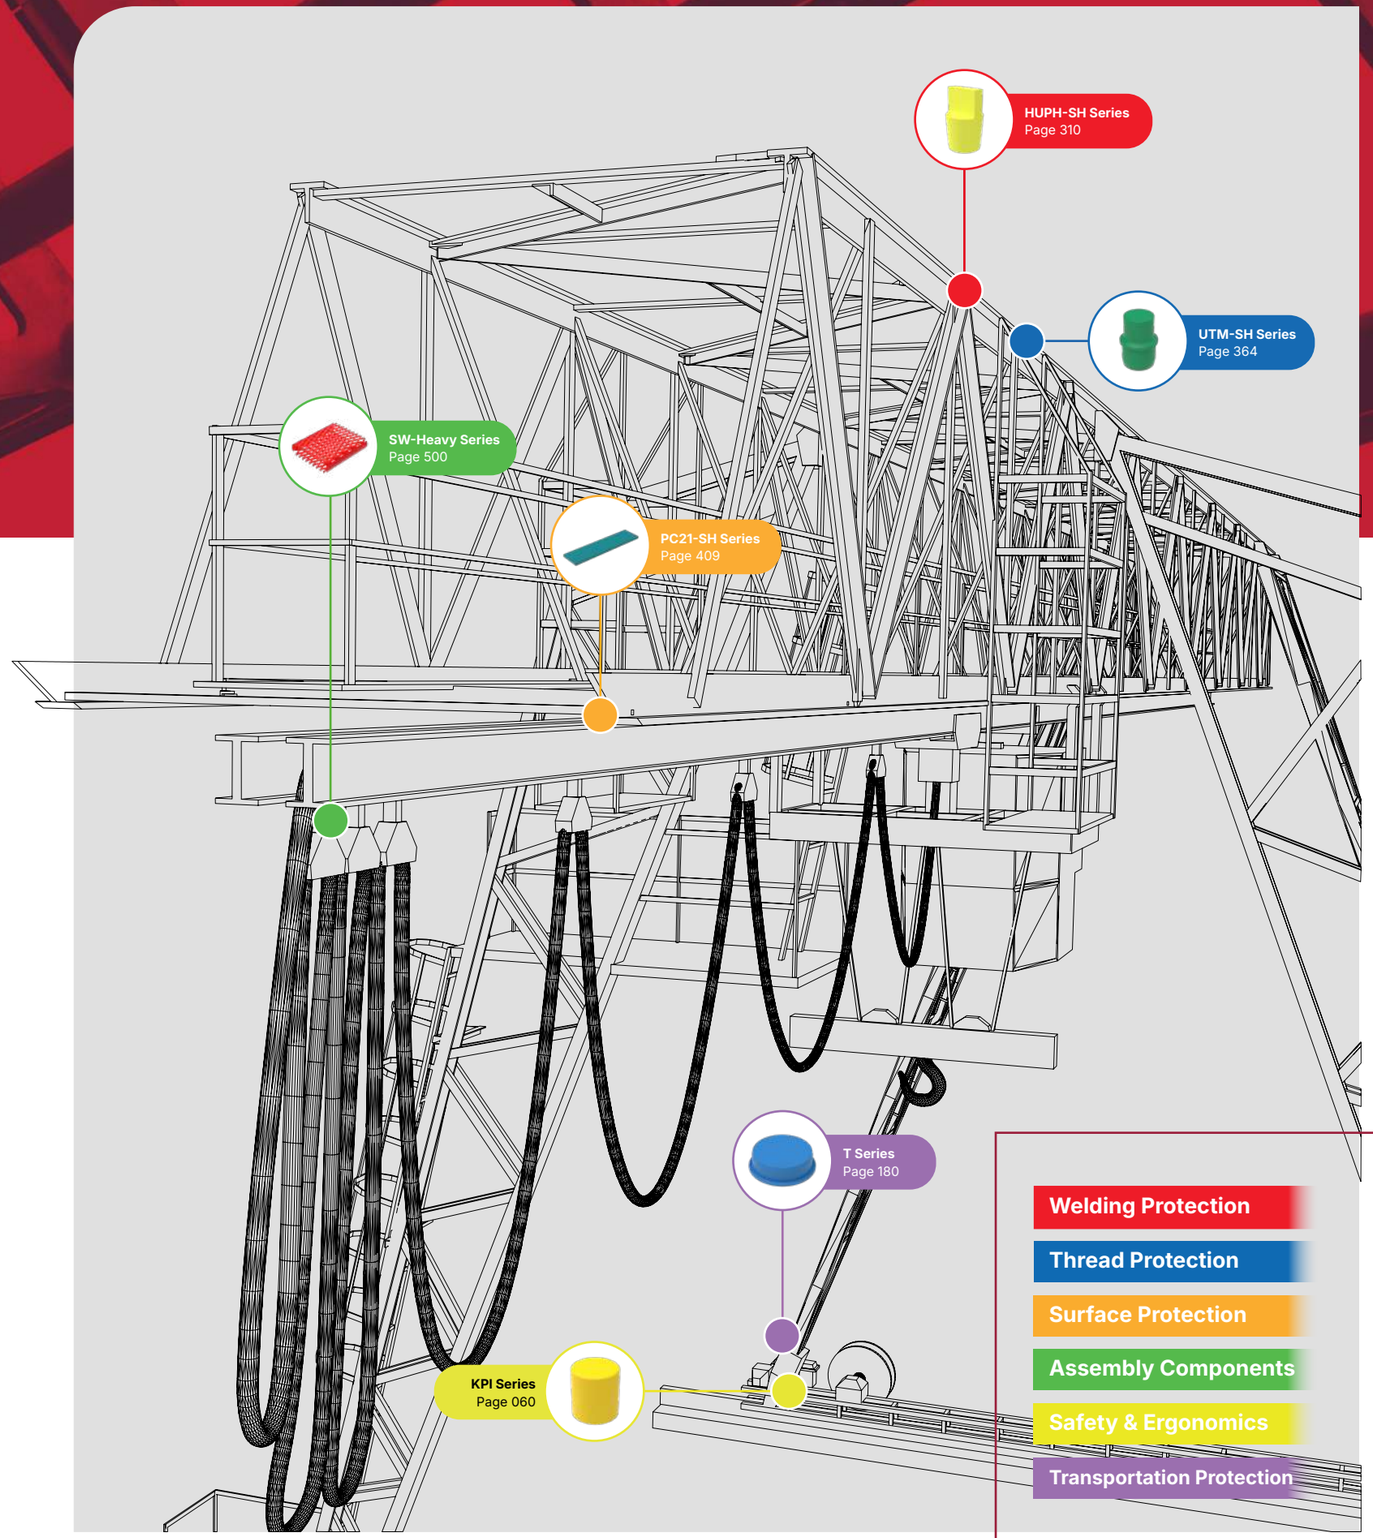

European Product Protection Solutions

Hydraulics Industry

Caplugs hydraulics industry-specific products provide robust contamination control and reliable sealing to maintain system integrity and functionality.

- **Protective Spirals and Sleeves**
  Safeguarding hydraulic hoses and tubing from external abrasion and wear, to extend operational lifespan.
- **Threaded Caps and Plugs**
  Specifically designed to provide a secure fit for hydraulic fittings, valves, and assemblies, guarding against leaks and contamination.
- **Flange Covers**
  Protecting hydraulic flanges from potential damage and contamination during handling and installation.

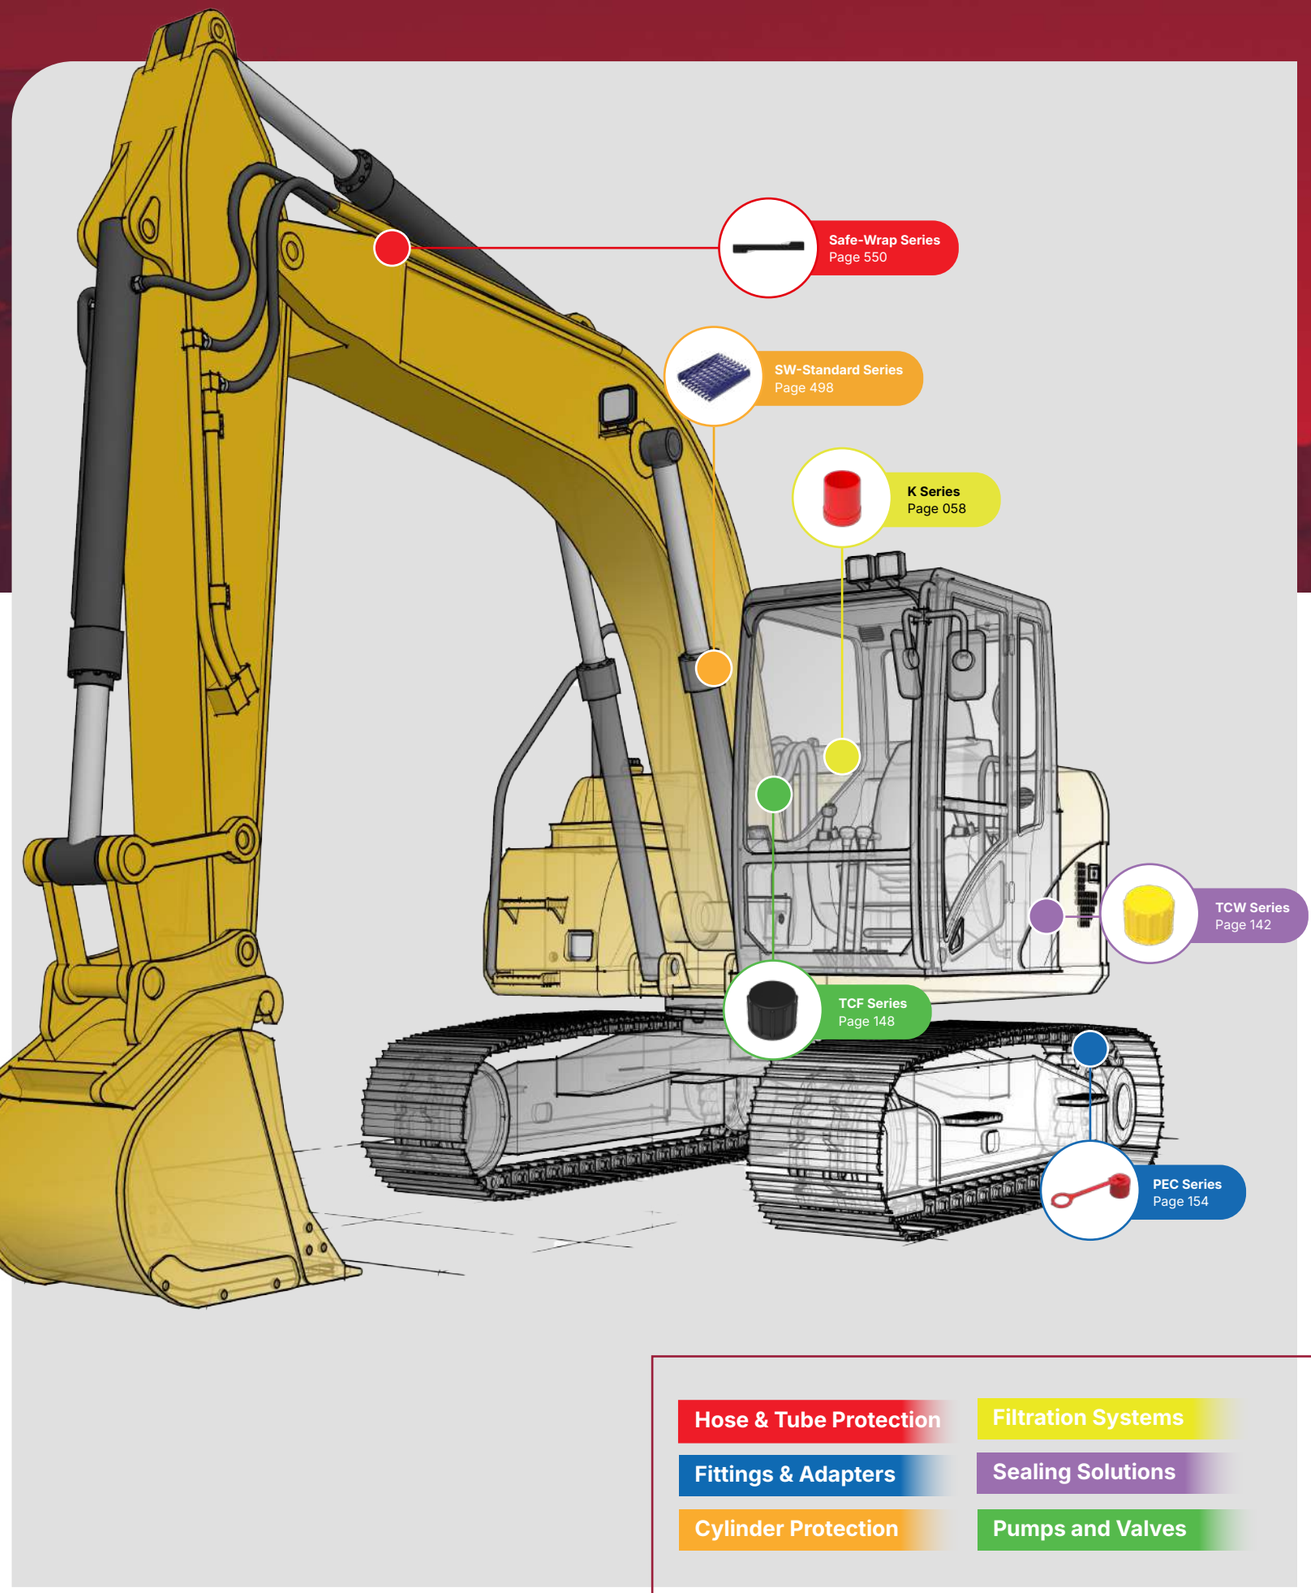

The Hydraulics Industry - Overview

Durable high-performance hydraulics continue to play a critical role in the function of systems where reliability, integrity and precision are paramount.

Specific Solutions

Caplugs supports manufacturers in three critical areas.

Contamination Protection

Caplugs solutions - caps, plugs, and covers – shield against dirt, dust, and moisture to maintain the cleanliness and functionality of hydraulic systems during storage, shipping, and operation.

Leak Prevention

Our robust sealing solutions are essential for preventing fluid leaks, thus maintaining hydraulic system pressure and efficiency, and enabling optimal performance.

Customised Protection

Our custom-fitted protective spirals and sleeves ensure a perfect fit and comprehensive protection for all types of hydraulic components.

Performance Under Pressure

Our protection products are built on deep sector knowledge and broad experience of the practical needs of hydraulic systems. We engineer our solutions to reduce maintenance costs, enhance system uptime and ensure performance under pressure.

Hose & Tube Protection
Filtration Systems
Fittings & Adapters
Sealing Solutions
Cylinder Protection
Pumps and Valves

Caplugs Caps

When Robust, Reliable Protection is Critical

Caplugs caps play a critical role in protecting pipes, tubes, and rods.
These non-threaded caps guard against contamination and damage during shipping, storage, and handling. Engineered for a precise fit, each creates a tight seal that effectively blocks unwanted external factors to maintain component integrity.

Designed to facilitate easy application and removal, they enable efficiency in industrial environments where rapid adjustments during maintenance and assembly processes are key to effective operation. They are optimised for seamless integration with the components they guard, protecting their functionality without impeding workflow.

Produced to strict technical specifications, these caps support reliable and uninterrupted industrial operations by protecting products, preserving finished items and extending the working life of essential components in settings where precision is imperative.

More details about these products on our website

K Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Durable Precision Cap

The K Series protective cap is designed for critical component protection. Robust yet flexible, the cap seals effectively against dirt, moisture and small particle penetration to maintain component integrity, quality and working life. Application and removal are quick and simple with potential snagging and tangling in crowded work areas minimised.

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°**C** / 150°**F**

***Internal rings or ribs help the cap to grip**

Clear (-**CL**)
RAL 9003

Red (-**RD**)
RAL 3000

Blue (-**BL**)
RAL 5015

Yellow (-**YL**)
RAL 1016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits pipe thread	Dimensions in mm			Dimensions in inches			Packaging
		d	h	D	d	h	D	
		Inside diameter	Inside height	Outside diameter	Inside diameter	Inside height	Outside diameter	Quantity per bag
13100324		5.50	13.00	7.00	0.217	0.512	0.276	5000
13103564		5.80	13.00	8.00	0.228	0.512	0.315	5000
13111424		7.50	7.40	9.90	0.295	0.291	0.390	2500
13122444		8.30	9.50	10.80	0.327	0.374	0.425	2500
13134694	G 1/8	9.30	16.00	12.00	0.366	0.630	0.472	1000
13143844		11.40	16.00	14.50	0.449	0.630	0.571	1000
13149224	G 1/4	12.70	16.00	15.50	0.500	0.630	0.610	1000
13152184		13.30	16.00	16.30	0.524	0.630	0.642	1000
13177814		13.50	8.00	15.50	0.531	0.315	0.610	1000
13179354		15.80	20.50	18.30	0.622	0.807	0.720	1000
13185094	G 3/8	15.70	20.00	18.20	0.618	0.787	0.717	1000
13189054	G 3/8	16.60	20.00	19.20	0.654	0.787	0.756	1000
13189744		17.70	14.00	19.80	0.697	0.551	0.780	1000
13190534		17.70	16.30	19.80	0.697	0.642	0.780	1000
13197064		17.60	20.00	20.50	0.693	0.787	0.807	1000
13210754		18.75	20.00	20.00	0.738	0.787	0.787	1000
13249984		19.20	20.00	22.10	0.756	0.787	0.870	1000
13272784	G 1/2	20.60	20.90	22.90	0.811	0.823	0.902	1000
13296984		20.80	21.00	23.50	0.819	0.827	0.925	1000
13301334		23.40	9.00	24.50	0.921	0.354	0.965	1000
13303204		23.40	18.00	25.70	0.921	0.709	1.012	1000
13305314		23.80	27.00	26.20	0.937	1.063	1.031	1000

9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

Visit **www.caplugs.eu** for full product information and build your order with precision and confidence.

K Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits pipe thread	Dimensions in mm			Dimensions in inches			Packaging
		d	h	D	d	h	D	
		Inside diameter	Inside height	Outside diameter	Inside diameter	Inside height	Outside diameter	Quantity per bag
13310264		23.90	20.50	26.30	0.941	0.807	1.035	1000
13316024		25.00	27.50	27.50	0.984	1.083	1.083	500
13316374	G 3/4	25.90	26.80	28.80	1.020	1.055	1.134	500
13317904	G 3/4	25.40	16.00	27.60	1.000	0.630	1.087	1000
13346914		26.80	27.00	29.50	1.055	1.063	1.161	500
13353384		29.50	9.00	30.80	1.161	0.354	1.213	1000
13355664		29.40	27.00	31.50	1.157	1.063	1.240	500
13362054		31.20	27.00	32.20	1.228	1.063	1.268	500
13362804	G 1	31.60	27.00	34.80	1.244	1.063	1.370	500
13368534	G 1	32.40	16.00	34.50	1.276	0.630	1.358	1000
13371204		34.00	17.00	36.70	1.339	0.669	1.445	500
13371724		33.60	27.00	36.60	1.323	1.063	1.441	500
13378914		36.20	31.50	38.70	1.425	1.240	1.524	250
13380534		37.40	50.00	39.80	1.472	1.969	1.567	250
13400194		39.40	27.00	42.50	1.551	1.063	1.673	250
13408154	G 1-1/4	41.50	27.00	44.10	1.634	1.063	1.736	200
13410434	G 1-1/4	40.90	18.20	43.00	1.610	0.717	1.693	250
13418834	G 1-3/8	44.40	35.00	47.00	1.748	1.378	1.850	200
13419644	G 1-1/2	47.10	18.20	49.50	1.854	0.717	1.949	500
13433604		47.60	35.00	49.50	1.874	1.378	1.949	250
13434584		49.20	28.00	52.70	1.937	1.102	2.075	250
13434624		51.00	35.00	53.00	2.008	1.378	2.087	200
13438924		53.70	35.00	56.40	2.114	1.378	2.220	200
13451214		54.70	18.20	57.00	2.154	0.717	2.244	250
13451544	G 2	58.70	17.60	61.50	2.311	0.693	2.421	250
13463244		69.40	34.50	72.00	2.732	1.358	2.835	100
13466604	G 2-1/2	75.00	34.50	75.50	2.953	1.358	2.972	100
13472814	G 3	86.00	35.00	90.00	3.386	1.378	3.543	50
13474654		89.50	72.00	91.50	3.524	2.835	3.602	200
13475364	G 3-1/4	92.50	18.00	95.50	3.642	0.709	3.760	50
13477214		98.50	70.00	101.50	3.878	2.756	3.996	100
13479654		98.50	40.00	101.50	3.878	1.575	3.996	400
13481364	G 3-3/4	106.80	35.00	109.50	4.205	1.378	4.311	50
13492074	G 4	111.80	35.00	116.00	4.402	1.378	4.567	50

Part Number	Fits pipe thread	d	h	D	d	h	D	Quantity per bag
		Inside diameter	Inside height	Outside diameter	Inside diameter	Inside height	Outside diameter	
		Dimensions in mm			Dimensions in inches			Packaging





9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

Our engineering experts are ready to help you with fully customised solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

KPI Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Internally Ribbed Cap

The KPI Series internally ribbed cap is precision engineered to fit securely and seamlessly on threaded parts, forming a highly effective barrier against contaminants such as moisture or oil. Resilient and durable, the cap handles easily to cut installation or removal time and is very practical in maintenance or assembly operations.

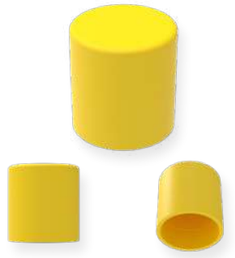

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°**C** / 150°**F**

***Internal rings or ribs help the cap to grip**

Yellow (-**YL**)
RAL 1021

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

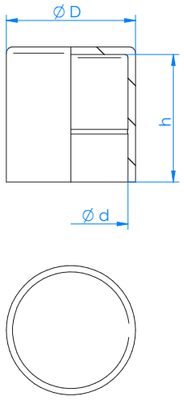

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	d	h	D	d	h	D	Quantity per bag
	Inside diameter	Inside height	Outside diameter	Inside diameter	Inside height	Outside diameter	
13103911	17.00	13.50	18.50	0.669	0.531	0.728	2500
13113141	17.30	17.00	19.30	0.681	0.669	0.760	2000
13156061	19.05	50.50	22.30	0.750	1.988	0.878	1000
13188271	20.00	16.50	22.50	0.787	0.650	0.886	1500
13202971	24.55	17.30	27.75	0.967	0.681	1.093	2000
13232491	25.00	21.00	27.20	0.984	0.827	1.071	1500
13260571	27.20	18.70	30.00	1.071	0.736	1.181	1500
13278451	31.00	19.60	34.00	1.220	0.772	1.339	500
13283131	31.80	27.50	34.20	1.252	1.083	1.346	500
13354721	39.50	21.85	43.00	1.555	0.860	1.693	500
13359281	40.00	29.00	42.00	1.575	1.142	1.654	500
13414781	47.80	32.50	51.00	1.882	1.280	2.008	250
13424351	57.60	26.00	61.00	2.268	1.024	2.402	250
13439901	73.00	29.00	76.50	2.874	1.142	3.012	150
13531441	87.80	34.00	90.80	3.457	1.339	3.575	100
13594051	109.80	37.00	113.00	4.323	1.457	4.449	100
13649961	114.00	65.00	118.00	4.488	2.559	4.646	50
13696231	132.00	34.00	136.00	5.197	1.339	5.354	50
13702281	138.60	60.00	142.00	5.457	2.362	5.591	50
13767141	158.00	40.00	162.00	6.220	1.575	6.378	50
13827111	166,00	58,00	170,00	6,535	2,283	6,693	50
13396771	176.50	56.50	180.00	6.946	2.224	7.084	50

KPI Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

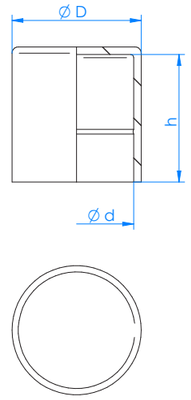

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	d	h	D	d	h	D	Quantity per bag
	Inside diameter	Inside height	Outside diameter	Inside diameter	Inside height	Outside diameter	
13841071	189.00	58.00	193.00	7.441	2.283	7.598	25
13850661	216.00	65.00	221.00	8.504	2.559	8.701	25
13857851	273.00	41.50	277.00	10.748	1.634	10.906	10
13864441	323.90	58.00	329.90	12.752	2.283	12.988	10
13960141	406.40	60.00	412.40	16.000	2.362	16.236	5
13980981	419.00	90.00	425.00	16.496	3.543	16.732	5
Part Number	d	h	D	d	h	D	Quantity per bag
	Inside diameter	Inside height	Outside diameter	Inside diameter	Inside height	Outside diameter	
	Dimensions in mm			Dimensions in inches			Packaging

SC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Sleeve Cap

The SC Series cap is purpose designed to robustly protect threaded and non-threaded component ends from contaminants and mechanical stress and damage. The built-in friction grip ensures a secure fit to prevent detachment during handling and transportation. Close masking during industrial processes ensures a clean, precision finish of high quality.

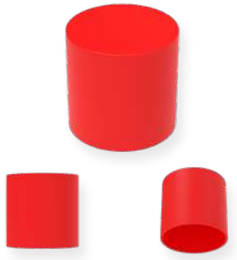



Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°**C** / 150°**F**

***Meets national aerospace standard NAS 844**

Red (-**RD**)
RAL 3024

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	NAS 844 Reference	Dimensions in mm		Dimensions in inches		Packaging	
		d	h	d	h	Carton quantity	Mini pack quantity
		Press fit on diameter	Inside height	Press fit on diameter	Inside height		
38992401	NAS 844-1	2.39	14.99	0.094	0.59	5000	1000
38134061	NAS 844-2	3.18	14.99	0.125	0.59	5000	1000
38164721	NAS 844-3	3.96	14.22	0.156	0.56	5000	1000
38203041	NAS 844-4	4.75	14.99	0.187	0.59	5000	1000
38248521	NAS 844-5	6.35	11.18	0.250	0.44	5000	1000
38259361	NAS 844-6	7.95	22.35	0.313	0.88	5000	1000
38314741	NAS 844-7	9.53	22.35	0.375	0.88	5000	1000
38350911	NAS 844-8	11.13	22.35	0.438	0.88	5000	1000
38374481	NAS 844-9	12.70	22.35	0.500	0.88	5000	1000
38406101	NAS 844-10	14.30	22.35	0.563	0.88	5000	1000
38411651	NAS 844-11	15.88	22.35	0.625	0.88	5000	1000
38419881	NAS 844-12	17.45	22.35	0.687	0.88	5000	1000
38429521	NAS 844-13	19.05	22.35	0.750	0.88	5000	1000
38440121	NAS 844-14	20.65	22.35	0.813	0.88	5000	1000
38450991	NAS 844-15	22.23	22.35	0.875	0.88	5000	1000
38465521	NAS 844-16	25.40	25.40	1.000	1.00	2500	500
38473781	NAS 844-17	28.58	25.40	1.125	1.00	2500	500
38475871	NAS 844-18	31.75	25.40	1.250	1.00	2000	400
38494491	NAS 844-19	34.93	24.89	1.375	0.98	1000	200
38548211	NAS 844-20	38.10	25.40	1.500	1.00	1000	200
38566731	NAS 844-21	41.28	25.40	1.625	1.00	1000	200
38579211	NAS 844-22	44.45	25.40	1.750	1.00	1000	200



9001
ISO certification

14001
ISO certification

16949
IATF certification

SC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	NAS 844 Reference	Dimensions in mm		Dimensions in inches		Packaging	
		d	h	d	h	Carton quantity	Mini pack quantity
		Press fit on diameter	Inside height	Press fit on diameter	Inside height		
38614611	NAS 844-23	47.63	25.40	1.875	1.00	1000	200
38623601	NAS 844-24	50.80	22.35	2.000	0.88	1000	200
38635751	NAS 844-25	53.98	25.40	2.125	1.00	500	100
38638891	NAS 844-26	57.15	22.35	2.250	0.88	500	100
38653871	NAS 844-27	60.33	22.35	2.375	0.88	500	100
38662221	NAS 844-28	63.50	22.35	2.500	0.88	500	100
38673111	NAS 844-29	66.68	25.40	2.625	1.00	500	100
38680401	NAS 844-30	69.85	25.40	2.750	1.00	500	100
38730771	NAS 844-31	76.20	25.40	3.000	1.00	450	90
38796311	NAS 844-32	79.38	35.05	3.125	1.38	250	50
Part Number	NAS 844 Reference	d	h	d	h	Carton quantity	Mini pack quantity
		Press fit on diameter	Inside height	Press fit on diameter	Inside height		
		Dimensions in mm		Dimensions in inches		Packaging	





9001
ISO certification

14001
ISO certification

16949
IATF certification

M Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Profiled Lug Cap

The M Series cap fits snugly over threaded openings, providing a secure seal to prevent fluid or debris entry. The conical profile ensures a tight fit, maintaining the cleanliness and integrity of connections for reliable operation. Durable construction extends working life, while the grip-enhancing design keeps it firmly in place.



Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°C / 150°F

***Can be used as a cap or a plug**

Clear (-**CL**)
RAL 9003



Yellow (-**YL**)
RAL 1016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Fits Metric thread as a cap	Fits Pipe thread as a cap	Dimensions in mm						Packaging
			d	d1	h	D2	D	D1	
			Inside diameter	Inside diameter	Height	Flange diameter	Outside diameter	Outside diameter	Quantity per Bag
13119444	M4, M4 x 0.5		4,60	2,80	10,00	10,00	6,20	4,40	5000
13130554	M5, M5 x 0.5, M6		6,20	4,40	10,00	11,00	7,80	6,00	5000
13130754			7,80	6,00	10,00	13,00	9,40	7,60	5000
13156684			9,30	7,50	10,00	14,00	11,00	9,20	5000
13158954	M10 x 1		10,10	8,30	10,00	15,00	11,70	9,90	5000
13160764	M10	G 1/8	10,80	9,00	10,00	16,00	12,40	10,60	1000
13161214			11,20	9,50	10,00	17,00	13,10	11,30	5000
13183254	M12, M12 x 1.5		12,50	10,40	12,00	18,00	14,10	12,00	1000
13200454			13,30	11,20	12,00	18,00	14,60	12,50	1000
13203334		G 1/4	14,00	11,90	12,00	19,00	15,60	13,50	1000
13233884	M14, M14 x 1.5		14,50	12,40	12,00	19,00	16,10	14,00	1000
13240294			15,50	13,20	13,00	21,00	17,00	14,70	1000
13242354	M16, M16 x 1.5		17,00	14,70	13,00	22,00	18,60	16,30	1000
13263054		G 3/8	17,80	15,50	13,00	22,00	19,40	17,10	1000
13291534	M18, M18 x 1.5		18,50	15,90	15,00	24,00	20,10	17,50	1000
13305644			19,40	16,80	15,00	25,00	21,00	18,40	1000
13311474			20,00	17,40	15,00	25,00	21,60	19,00	1000
13314494	M20, M20 x 1.5		21,60	18,80	17,00	27,00	23,20	20,40	1000
13335104		G 1/2	21,90	19,10	16,00	28,00	23,50	20,70	500
13340324	M22, M22 x 1.5		23,20	20,40	16,00	29,00	24,80	22,00	500
13342744	M24, M24 x 2.5	G 5/8	24,40	21,20	18,00	30,00	26,30	23,20	500
13378774			26,20	22,90	19,00	32,00	27,80	24,50	500

9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

M Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits Metric thread as a cap	Fits Pipe thread as a cap	Dimensions in inches						Packaging
			d	d1	h	D2	D	D1	
			Inside diameter	Inside diameter	Height	Flange diameter	Outside diameter	Outside diameter	Quantity per Bag
13119444	M4, M4 x 0.5		0,181	0,110	0,394	0,394	0,244	0,173	5000
13130554	M5, M5 x 0.5, M6		0,244	0,173	0,394	0,433	0,307	0,236	5000
13130754			0,307	0,236	0,394	0,512	0,370	0,299	5000
13156684			0,366	0,295	0,394	0,551	0,433	0,362	5000
13158954	M10 x 1		0,398	0,327	0,394	0,591	0,461	0,390	5000
13160764	M10	G 1/8	0,425	0,354	0,394	0,630	0,488	0,417	1000
13161214			0,441	0,374	0,394	0,669	0,516	0,445	5000
13183254	M12, M12 x 1.5		0,492	0,409	0,472	0,709	0,555	0,472	1000
13200454			0,524	0,441	0,472	0,709	0,575	0,492	1000
13203334		G 1/4	0,551	0,469	0,472	0,748	0,614	0,531	1000
13233884	M14, M14 x 1.5		0,571	0,488	0,472	0,748	0,634	0,551	1000
13240294			0,610	0,520	0,512	0,827	0,669	0,579	1000
13242354	M16, M16 x 1.5		0,669	0,579	0,512	0,866	0,732	0,642	1000
13263054		G 3/8	0,701	0,610	0,512	0,866	0,764	0,673	1000
13291534	M18, M18 x 1.5		0,728	0,626	0,591	0,945	0,791	0,689	1000
13305644			0,764	0,661	0,591	0,984	0,827	0,724	1000
13311474			0,787	0,685	0,591	0,984	0,850	0,748	1000
13314494	M20, M20 x 1.5		0,850	0,740	0,669	1,063	0,913	0,803	1000
13335104		G 1/2	0,862	0,752	0,630	1,102	0,925	0,815	500
13340324	M22, M22 x 1.5		0,913	0,803	0,630	1,142	0,976	0,866	500
13342744	M24, M24 x 2.5	G 5/8	0,961	0,835	0,709	1,181	1,035	0,913	500
13378774			1,031	0,902	0,748	1,260	1,094	0,965	500





9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

M Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits Metric thread as a cap	Fits Pipe thread as a cap	Dimensions in mm						Packaging
			d	d1	h	D2	D	D1	
			Inside diameter	Inside diameter	Height	Flange diameter	Outside diameter	Outside diameter	Quantity per Bag
13382554	M26 x 1.5	G 3/4	27,70	23,70	19,00	33,00	29,20	25,20	500
13386624	M28 x 1.5		29,50	26,20	19,00	35,00	31,10	27,80	500
13396264	M30, M30 x 1.5		31,10	28,30	16,00	37,00	32,60	29,80	500
13401754	M33, M32 x 1.5		33,40	29,70	21,00	38,00	35,10	31,40	500
13408544		G 1	35,50	31,70	22,00	41,00	37,10	33,30	500
13415684	M36, M38 x 1.5	G 1-1/8	39,00	35,20	21,00	45,00	40,50	36,70	250
13417854	M40 x 1.5		41,40	36,60	23,00	48,00	43,00	38,20	250
13474034			41,30	38,00	19,00	48,00	42,90	39,60	250
13477844	M42, M42 x 1.5	G 1-1/4	43,00	39,70	19,00	49,00	44,70	41,40	250
13483574	M45	G 1-3/8	46,10	42,80	19,00	51,00	47,70	44,40	250
13489394			48,00	43,60	25,00	54,00	49,60	45,20	250
13497054	M48, M48 x 1.5	G 1-1/2	49,60	45,20	25,00	55,00	51,00	46,60	100
13500374	M52 x 1.5	G 1-3/4	55,20	50,80	25,00	62,00	56,90	52,50	100
13560894			57,80	52,50	25,00	65,00	59,30	54,00	100
13568304			57,00	52,60	25,00	65,00	58,60	54,20	100
13631424	M60 x 1.5	G 2	61,10	56,70	25,00	67,00	62,80	58,40	100
13639164	M62 x 1.5		64,30	59,00	29,00	71,00	67,10	60,70	100
13662104			68,70	65,40	19,00	75,00	70,40	67,10	100
13691854	M72 x 1.5		74,10	70,80	19,00	83,00	75,70	72,40	100
13700204			85,70	82,40	19,00	92,00	87,80	84,50	100

Part Number	Fits Metric thread as a cap	Fits Pipe thread as a cap	d	d1	h	D2	D	D1	Quantity per Bag
			Inside diameter	Inside diameter	Height	Flange diameter	Outside diameter	Outside diameter	
			Dimensions in mm						Packaging

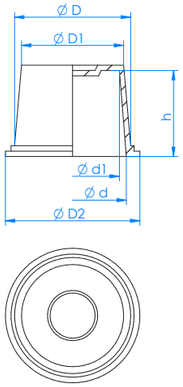

9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

M Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits Metric thread as a cap	Fits Pipe thread as a cap	Dimensions in inches						Packaging
			d	d1	h	D2	D	D1	
			Inside diameter	Inside diameter	Height	Flange diameter	Outside diameter	Outside diameter	Quantity per Bag
13382554	M26 x 1.5	G 3/4	1,091	0,933	0,748	1,299	1,150	0,992	500
13386624	M28 x 1.5		1,161	1,031	0,748	1,378	1,224	1,094	500
13396264	M30, M30 x 1.5		1,224	1,114	0,630	1,457	1,283	1,173	500
13401754	M33, M32 x 1.5		1,315	1,169	0,827	1,496	1,382	1,236	500
13408544		G 1	1,398	1,248	0,866	1,614	1,461	1,311	500
13415684	M36, M38 x 1.5	G 1-1/8	1,535	1,386	0,827	1,772	1,594	1,445	250
13417854	M40 x 1.5		1,630	1,441	0,906	1,890	1,693	1,504	250
13474034			1,626	1,496	0,748	1,890	1,689	1,559	250
13477844	M42, M42 x 1.5	G 1-1/4	1,693	1,563	0,748	1,929	1,760	1,630	250
13483574	M45	G 1-3/8	1,815	1,685	0,748	2,008	1,878	1,748	250
13489394			1,890	1,717	0,984	2,126	1,953	1,780	250
13497054	M48, M48 x 1.5	G 1-1/2	1,953	1,780	0,984	2,165	2,008	1,835	100
13500374	M52 x 1.5	G 1-3/4	2,173	2,000	0,984	2,441	2,240	2,067	100
13560894			2,276	2,067	0,984	2,559	2,335	2,126	100
13568304			2,244	2,071	0,984	2,559	2,307	2,134	100
13631424	M60 x 1.5	G 2	2,406	2,232	0,984	2,638	2,472	2,299	100
13639164	M62 x 1.5		2,531	2,323	1,142	2,795	2,642	2,390	100
13662104			2,705	2,575	0,748	2,953	2,772	2,642	100
13691854	M72 x 1.5		2,917	2,787	0,748	3,268	2,980	2,850	100
13700204			3,374	3,244	0,748	3,622	3,457	3,327	100

Part Number	Fits Metric thread as a cap	Fits Pipe thread as a cap	d	d1	h	D2	D	D1	Quantity per Bag
			Inside diameter	Inside diameter	Height	Flange diameter	Outside diameter	Outside diameter	
			Dimensions in inches						Packaging

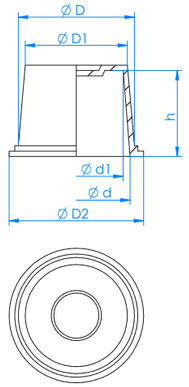

9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

GMP Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Push-On Cap

The GMP Series durable tapered cap fits snugly over threaded and non-threaded components. The absence of a tab creates a smooth profile, for situations where appearance is important. Robust sealing protects against dust, moisture, and debris, while the cap contours reduce the risk of snagging, or accidental detachment.

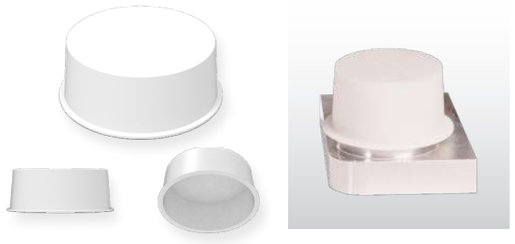

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°**C** / 150°**F**

***Can also be used as a plug**

Clear (-**CL**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm						Packaging
	d	d1	h	D2	D	D1	
	Inside diameter	Inside diameter	Inside height	Flange diameter	Outside diameter	Outside diameter	Carton Quantity
13145811	8,00	7,00	9,60	14,00	9,90	8,50	1.000
13150381	30,00	28,00	18,50	36,20	30,80	29,70	400
13176481	33,20	31,40	17,95	39,50	34,00	33,40	400
13184121	39,10	37,50	19,00	43,00	39,45	39,50	250
13198711	41,00	38,00	20,80	46,20	41,00	40,00	250
13217421	43,10	40,40	18,10	47,20	43,50	42,40	250
13234721	45,50	43,00	21,00	51,50	47,00	45,00	150
13259371	49,10	47,30	20,00	55,20	50,00	49,30	150
13279341	51,50	49,00	20,40	58,50	51,70	51,00	150
13313841	53,20	50,50	15,00	58,50	55,20	53,50	150
13345971	54,30	51,00	20,80	57,70	54,00	53,00	150
13352451	57,00	54,50	14,80	62,50	58,50	57,40	150
13380911	66,00	63,00	21,20	72,20	66,30	66,00	100
13422451	75,00	66,30	23,20	74,00	71,70	68,70	100
13485551	72,00	69,50	23,00	77,20	72,00	71,50	100
13500731	72,50	70,00	14,50	82,50	75,50	74,80	100
13514461	87,50	86,50	11,50	95,50	89,00	88,50	100
13521341	88,00	85,70	18,50	99,50	89,60	89,20	100
13537781	105,50	104,00	11,90	115,00	106,50	106,00	100

Part Number	d	d1	h	D2	D	D1	Carton Quantity
	Inside diameter	Inside diameter	Inside height	Flange diameter	Outside diameter	Outside diameter	
	Dimensions in mm						Packaging

GMP Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches						Packaging
	d	d1	h	D2	D	D1	
	Inside diameter	Inside diameter	Inside height	Flange diameter	Outside diameter	Outside diameter	Carton Quantity
13145811	0,276	0,378	0,551	0,390	0,335	1.000	1.000
13150381	1,102	0,728	1,425	1,213	1,169	400	400
13176481	1,236	0,707	1,555	1,339	1,315	400	400
13184121	1,476	0,748	1,693	1,553	1,555	250	250
13198711	1,496	0,819	1,819	1,614	1,575	250	250
13217421	1,591	0,713	1,858	1,713	1,669	250	250
13234721	1,693	0,827	2,028	1,850	1,772	150	150
13259371	1,862	0,787	2,173	1,969	1,941	150	150
13279341	1,929	0,803	2,303	2,035	2,008	150	150
13313841	1,988	0,591	2,303	2,173	2,106	150	150
13345971	2,008	0,819	2,272	2,126	2,087	150	150
13352451	2,146	0,583	2,461	2,303	2,260	150	150
13380911	2,480	0,835	2,843	2,610	2,598	100	100
13422451	2,610	0,913	2,913	2,823	2,705	100	100
13485551	2,736	0,906	3,039	2,835	2,815	100	100
13500731	2,756	0,571	3,248	2,972	2,945	100	100
13514461	3,406	0,453	3,760	3,504	3,484	100	100
13521341	3,374	0,728	3,917	3,528	3,512	100	100
13537781	4,094	0,469	4,528	4,193	4,173	100	100

Part Number	d	d1	h	D2	D	D1	Carton Quantity
	Inside diameter	Inside diameter	Inside height	Flange diameter	Outside diameter	Outside diameter	
	Dimensions in inches						Packaging





GMB Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Push-On Cap

The GMB Series cap is engineered to provide precise and robust protection of sensitive components. Shielding from dust, moisture and other harmful contaminants protects component quality while extending working life. The design enables ease of handling even in tight spaces and when the wearing of gloves reduces the operator's manual dexterity.

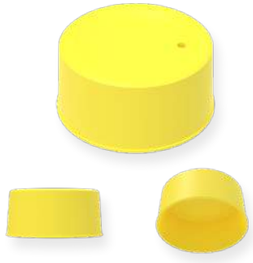

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°**C** / 150°**F**

***This cap has a small vent hole**

Yellow (-**YL**)
RAL 1018

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm						Packaging
	d	d1	h	D2	D	D1	
	Inside diameter	Inside diameter	Inside height	Flange diameter	Outside diameter	Outside diameter	Carton Quantity
13626191	56,00	50,65	23,65	58,00	53,60	52,65	700
13119771	65,20	62,76	25,72	69,00	68,00	65,00	400
13134141	73,50	72,50	28,45	77,50	76,40	75,65	300
13194481	89,88	87,24	35,32	95,00	94,00	90,00	150
13211501	111,50	108,00	37,88	117,00	114,60	111,00	100
13266541	129,00	125,00	39,75	133,00	131,80	127,00	50
13348531	143,00	135,00	44,00	147,00	145,00	139,00	50
13460501	161,50	157,50	44,90	166,00	164,80	160,00	40
13563471	181,30	178,50	54,20	186,00	183,80	181,00	30
13656311	201,15	196,00	55,25	206,00	205,10	200,00	20
13767331	228,90	222,40	58,00	232,00	230,60	225,00	15
13799791	315,00	310,27	61,40	318,20	318,20	313,47	5
Part Number	d	d1	h	D2	D	D1	Carton Quantity
	Inside diameter	Inside diameter	Inside height	Flange diameter	Outside diameter	Outside diameter	
	Dimensions in mm						Packaging

GMB Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches						Packaging
	d	d1	h	D2	D	D1	
	Inside diameter	Inside diameter	Inside height	Flange diameter	Outside diameter	Outside diameter	Carton Quantity
13626191	2,205	1,994	0,931	2,283	2,110	2,073	700
13119771	2,567	2,471	1,013	2,717	2,677	2,559	400
13134141	2,894	2,854	1,120	3,051	3,008	2,978	300
13194481	3,539	3,435	1,391	3,740	3,701	3,543	150
13211501	4,390	4,252	1,491	4,606	4,512	4,370	100
13266541	5,079	4,921	1,565	5,236	5,189	5,000	50
13348531	5,630	5,315	1,732	5,787	5,709	5,472	50
13460501	6,358	6,201	1,768	6,535	6,488	6,299	40
13563471	7,138	7,028	2,134	7,323	7,236	7,126	30
13656311	7,919	7,717	2,175	8,110	8,075	7,874	20
13767331	9,012	8,756	2,283	9,134	9,079	8,858	15
13799791	12,402	12,215	2,417	12,528	12,528	12,341	5
Part Number	d	d1	h	D2	D	D1	Carton Quantity
	Inside diameter	Inside diameter	Inside height	Flange diameter	Outside diameter	Outside diameter	
	Dimensions in inches						Packaging





T Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Dish Cap

The T Series cap is specifically designed to protect threaded ports and boreholes from contaminants and moisture, ensuring component cleanliness. The rugged construction withstands harsh environmental and mechanical conditions, maintaining integrity and functionality. Effortless application and removal provide a reliable seal without damaging threads.

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°C / 150°F

***Can also be used as a plug**

Clear (-**CL**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm				Dimensions in inches				Packaging
	d	h	D	D1	d	h	D	D1	
	Inside diameter	Height	Flange diameter	Outside diameter	Inside diameter	Height	Flange diameter	Outside diameter	Quantity per bag
13336724	3.00	4.20	8.30	4.25	0.118	0.165	0.327	0.167	5000
13109234	3.90	5.90	8.30	5.30	0.154	0.232	0.327	0.209	5000
13115714	4.10	5.70	8.70	5.70	0.161	0.224	0.343	0.224	5000
13129544	5.20	5.85	9.30	6.30	0.205	0.230	0.366	0.248	5000
13138114	5.20	5.80	9.70	6.70	0.205	0.228	0.382	0.264	5000
13155794	6.10	7.00	10.20	7.20	0.240	0.276	0.402	0.283	5000
13198964	6.10	6.80	10.70	7.70	0.240	0.268	0.421	0.303	5000
13212424	7.00	7.15	11.10	8.10	0.276	0.281	0.437	0.319	5000
13222764	7.00	6.90	11.50	8.50	0.276	0.272	0.453	0.335	5000
13228374	7.90	6.35	12.90	9.10	0.311	0.250	0.508	0.358	5000
13229094	7.90	10.80	12.90	9.20	0.311	0.425	0.508	0.362	5000
13255534	9.30	7.00	14.30	10.40	0.366	0.276	0.563	0.409	5000
13271684	9.30	7.00	14.70	10.80	0.366	0.276	0.579	0.425	5000
13295244	10.30	7.60	15.20	11.20	0.406	0.299	0.598	0.441	5000
13300704	10.30	7.30	15.70	11.70	0.406	0.287	0.618	0.461	5000
13306734	11.00	7.00	15.90	12.10	0.433	0.276	0.626	0.476	5000
13314314	11.00	7.20	16.40	12.50	0.433	0.283	0.646	0.492	5000
13320854	11.90	8.10	16.90	13.00	0.469	0.319	0.665	0.512	5000
13324694	12.40	8.00	17.80	14.00	0.488	0.315	0.701	0.551	5000
13340384	13.30	8.10	18.40	14.50	0.524	0.319	0.724	0.571	5000
13347634	13.30	8.00	19.00	15.00	0.524	0.315	0.748	0.591	5000
13371474	13.80	11.20	19.30	15.30	0.543	0.441	0.760	0.602	1000

9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

T Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm				Dimensions in inches				Packaging
	d	h	D	D1	d	h	D	D1	
	Inside diameter	Height	Flange diameter	Outside diameter	Inside diameter	Height	Flange diameter	Outside diameter	Quantity per bag
13377854	13.80	11.60	25.50	15.30	0.543	0.457	1.004	0.602	1000
13382164	14.40	8.00	19.10	15.50	0.567	0.315	0.752	0.610	5000
13398004	14.90	8.10	19.60	16.00	0.587	0.319	0.772	0.630	5000
13399524	14.90	8.00	19.70	16.50	0.587	0.315	0.776	0.650	5000
13408224	16.10	8.00	20.90	17.10	0.634	0.315	0.823	0.673	1000
13408524	16.70	8.00	21.40	17.80	0.657	0.315	0.843	0.701	1000
13418174	16.70	8.00	21.80	18.20	0.657	0.315	0.858	0.717	1000
13434644	17.80	11.70	29.70	19.00	0.701	0.461	1.169	0.748	1000
13437284	18.50	8.30	23.30	19.60	0.728	0.327	0.917	0.772	1000
13446784	18.50	5.50	23.30	19.60	0.728	0.217	0.917	0.772	2500
13459984	19.60	8.50	24.70	20.70	0.772	0.335	0.972	0.815	1000
13476114	20.60	8.70	25.70	21.70	0.811	0.343	1.012	0.854	1000
13479024	20.60	9.00	26.20	22.30	0.811	0.354	1.031	0.878	1000
13482134	23.40	8.80	28.20	24.50	0.921	0.346	1.110	0.965	1000
13482294	23.90	8.80	28.80	25.10	0.941	0.346	1.134	0.988	1000
13483264	24.70	8.85	30.00	26.00	0.972	0.348	1.181	1.024	1000
13486924	24.70	9.20	30.60	26.60	0.972	0.362	1.205	1.047	1000
13489534	26.00	9.00	31.20	27.20	1.024	0.354	1.228	1.071	1000
13499144	26.00	8.90	31.60	27.70	1.024	0.350	1.244	1.091	1000
13500894	27.80	9.20	32.80	28.90	1.094	0.362	1.291	1.138	1000
13508964	28.80	9.20	34.00	30.00	1.134	0.362	1.339	1.181	1000
13557374	29.90	9.00	35.00	31.10	1.177	0.354	1.378	1.224	1000
13572324	30.20	8.30	35.50	31.40	1.189	0.327	1.398	1.236	1000
13583534	30.20	9.20	35.80	31.80	1.189	0.362	1.409	1.252	1000
13588554	31.70	9.00	37.20	33.20	1.248	0.354	1.465	1.307	500
13590324	34.40	9.00	40.20	36.00	1.354	0.354	1.583	1.417	500
13595294	37.50	9.15	43.10	39.10	1.476	0.360	1.697	1.539	500
13600974	38.00	9.15	46.20	39.50	1.496	0.360	1.819	1.555	500
13604364	38.90	8.40	46.80	40.10	1.531	0.331	1.843	1.579	500
13610624	39.10	9.00	47.50	40.70	1.539	0.354	1.870	1.602	500
13637484	41.40	4.00	46.40	42.60	1.630	0.157	1.827	1.677	500
13640804	41.70	9.15	47.20	43.00	1.642	0.360	1.858	1.693	500
13645244	44.50	9.20	52.70	46.10	1.752	0.362	2.075	1.815	500
13674764	45.10	6.00	50.30	46.60	1.776	0.236	1.980	1.835	500
13685474	49.50	8.70	60.00	51.10	1.949	0.343	2.362	2.012	500
13699254	56.50	8.70	67.00	58.20	2.224	0.343	2.638	2.291	500
13711524	58.80	10.00	61.70	60.00	2.315	0.394	2.429	2.362	500



9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

T Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm				Dimensions in inches				Packaging
	d	h	D	D1	d	h	D	D1	
	Inside diameter	Height	Flange diameter	Outside diameter	Inside diameter	Height	Flange diameter	Outside diameter	Quantity per bag
13727464	64.60	9.00	75.20	66.20	2.543	0.354	2.961	2.606	250
13731164	71.80	9.00	82.50	73.60	2.827	0.354	3.248	2.898	250
13766764	79.40	9.25	90.20	81.20	3.126	0.364	3.551	3.197	250
13787354	83.20	9.00	93.80	85.10	3.276	0.354	3.693	3.350	250
13794414	84.60	10.00	98.60	86.60	3.331	0.394	3.882	3.409	250
13797594	99.50	10.00	113.80	101.80	3.917	0.394	4.480	4.008	250

Part Number	d	h	D	D1	d	h	D	D1	Quantity per bag
	Inside diameter	Height	Flange diameter	Outside diameter	Inside diameter	Height	Flange diameter	Outside diameter	
	Dimensions in mm				Dimensions in inches				Packaging



9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

Caplugs 360° Solutions Manufacturing

Contact us on Caplugs.eu

R Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Knurled Texture Cap

The R Series cap's knurled texture increases surface area and enhances grip when oil, water or other slippery substances are present. Effective handling, even in gloves, enables secure fastening, easy adjustment and faster operation. The cap offers durable protection, resisting chemical corrosion or temperature variation with no functionality loss.



Material: Low Density Polyethylene (LDPE) / some Products are available in TPE
Temperature Resistance: 66°**C** / 150°**F**

***A number of different materials are available**

Clear (-**CL**)
RAL 9003

Yellow (-**YL**)
RAL 1016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits thread	Dimensions in mm				Packaging
		d	h	D	D1	
		Inside diameter	Inside height	Outside diameter	Flange diameter	Quantity per bag
13113624		8.00	10.50	9.95	11.40	2500
13128294		10.00	10.50	11.80	13.10	2500
13166504		12.00	16.10	13.80	15.00	2500
13172134		14.00	15.60	15.90	17.30	1000
13208124		16.00	15.60	18.00	19.30	1000
13242154		16.00	20.40	17.90	19.60	1000
13294334		18.00	20.60	20.00	21.80	1000
13449684		20.00	20.60	21.85	23.80	1000
13474774		22.00	18.60	24.10	27.30	1000
13504244		24.00	18.00	26.20	27.80	500
13569924	1-14 UN	25.00	20.00	27.60	29.50	500
13577734		27.00	20.00	29.10	30.80	500
13598434		30.00	20.00	32.20	34.20	500
13653834		36.00	20.00	38.00	40.00	500
13769404	G 1/8	9.50	8.00	11.20	12.50	5000
13840624	G 1/4	12.80	12.00	14.90	16.50	5000
13847994	G 3/8	16.30	12.00	18.50	19.80	2500
13856434	G 1/2	20.50	14.00	22.50	24.50	2500
13882654	G 3/4	26.00	16.00	28.40	30.50	750
13913924	G 1	32.80	18.00	35.20	37.20	500
13927384	G 1-1/4	41.50	20.00	44.00	46.00	500



9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

R Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits thread	Dimensions in inches				Packaging
		d	h	D	D1	
		Inside diameter	Inside height	Outside diameter	Flange diameter	Quantity per bag
13113624		0.315	0.413	0.392	0.449	2500
13128294		0.394	0.413	0.465	0.516	2500
13166504		0.472	0.634	0.543	0.591	2500
13172134		0.551	0.614	0.626	0.681	1000
13208124		0.630	0.614	0.709	0.760	1000
13242154		0.630	0.803	0.705	0.772	1000
13294334		0.709	0.811	0.787	0.858	1000
13449684		0.787	0.811	0.860	0.937	1000
13474774		0.866	0.732	0.949	1.075	1000
13504244		0.945	0.709	1.031	1.094	500
13569924	1-14 UN	0.984	0.787	1.087	1.161	500
13577734		1.063	0.787	1.146	1.213	500
13598434		1.181	0.787	1.268	1.346	500
13653834		1.417	0.787	1.496	1.575	500
13769404	G 1/8	0.374	0.315	0.441	0.492	5000
13840624	G 1/4	0.504	0.472	0.587	0.650	5000
13847994	G 3/8	0.642	0.472	0.728	0.780	2500
13856434	G 1/2	0.807	0.551	0.886	0.965	2500
13882654	G 3/4	1.024	0.630	1.118	1.201	750
13913924	G 1	1.291	0.709	1.386	1.465	500
13927384	G 1-1/4	1.634	0.787	1.732	1.811	500





9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

R Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits thread	Dimensions in mm				Packaging
		d	h	D	D1	Quantity per bag
		Inside diameter	Inside height	Outside diameter	Flange diameter	
13928174	G 1-1/2	47.30	22.00	50.30	52.50	500
13930324	G 2	59.00	24.00	62.00	65.00	500

Part Number	Fits thread	d	h	D	D1	Quantity per bag
		Inside diameter	Inside height	Outside diameter	Flange diameter	
		Dimensions in mm				Packaging





9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

R Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits thread	Dimensions in inches				Packaging
		d	h	D	D1	Quantity per bag
		Inside diameter	Inside height	Outside diameter	Flange diameter	
13928174	G 1-1/2	1.862	0.866	1.980	2.067	500
13930324	G 2	2.323	0.945	2.441	2.559	500

Part Number	Fits thread	d	h	D	D1	Quantity per bag
		Inside diameter	Inside height	Outside diameter	Flange diameter	
		Dimensions in inches				Packaging





9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

RU Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

High Precision Knurled Cap

The RU Series cap is designed for specialised and high precision applications and is capable of withstanding varied pressures. Robust construction provides secure thread protection against dust and operational by-products or damage by machinery movements or vibrations, the knurled exterior enables reliable grasp during manual or automated handling.



Material: Low Density Polyethylene (LDPE) / Thermoplastic Elastomer (TPE)
Temperature Resistance: 66°**C** / 150°**F**

***The stepped design forms a handle for easy removal.**

Clear (-**CL**)
RAL 9003

Blue (-**BL**)
RAL 5015

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits UNF thread	Material	Dimensions in mm					Packaging
			d	h	H	D	D1	
			Inside diameter	Inside height	Height	Outside diameter	Flange diameter	Quanitity per Bag
13170324	9/16	LDPE	13.90	11.00	14.50	15.50	16.50	1000
13201664	11/16	LDPE	17.10	13.00	16.50	19.30	19.30	1000
13215324	13/16	LDPE	19.80	16.00	22.00	21.40	21.50	1000
13424314	1	LDPE	24.80	16.70	22.70	26.40	26.80	1000
13341664	9/16	TPE	13.90	11.00	14.50	15.50	16.50	1000
13642054	11/16	TPE	17.10	13.00	16.50	19.30	19.30	1000
13646214	13/16	TPE	19.80	16.00	22.00	21.40	21.50	1000
13651664	1	TPE	24.80	16.70	22.70	26.40	26.80	1000
Part Number	Fits UNF thread	Material	d	h	H	D	D1	Quanitity per Bag
			Inside diameter	Inside height	Height	Outside diameter	Flange diameter	
			Dimensions in mm					Packaging



9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

RU Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits UNF thread	Material	Dimensions in inches					Packaging
			d	h	H	D	D1	
			Inside diameter	Inside height	Height	Outside diameter	Flange diameter	Quanitity per Bag
13170324	9/16	LDPE	0.547	0.433	0.571	0.610	0.650	1000
13201664	11/16	LDPE	0.673	0.512	0.650	0.760	0.760	1000
13215324	13/16	LDPE	0.780	0.630	0.866	0.843	0.846	1000
13424314	1	LDPE	0.976	0.657	0.894	1.039	1.055	1000
13341664	9/16	TPE	0.547	0.433	0.571	0.610	0.650	1000
13642054	11/16	TPE	0.673	0.512	0.650	0.760	0.760	1000
13646214	13/16	TPE	0.780	0.630	0.866	0.843	0.846	1000
13651664	1	TPE	0.976	0.657	0.894	1.039	1.055	1000
Part Number	Fits UNF thread	Material	d	h	H	D	D1	Quanitity per Bag
			Inside diameter	Inside height	Height	Outside diameter	Flange diameter	
			Dimensions in inches					Packaging





9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

AS138 Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Connector Dust Cap

The AS138 Series dust cap is engineered for component protection when precision and reliability are imperatives. The specialised easy-to-fit design shields circular connectors from dust, moisture, and other contaminants, to maintain electrical systems integrity. A built-in attachment mechanism keeps the cap reliably in place, even during vibration.

Material: Refer to product table.
Temperature Resistance: Refer to product table.

***Meets national aerospace standard AS 138**

Red (**-RD**)
RAL 3024

Black (**-BK**)
RAL 9005

Yellow (**-YL**)
RAL 1026

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	AS85049/138 Ref	Material	Dimensions in mm					Packaging	
			d	D	h	H	D1	Carton quantity	Mini pack quantity
			Inside diameter	Outside diameter	Inside height	Outside height	Flange diameter		
38100521	AS85049/138-08A	LDPE	6.22	7.75	12.70	13.59	10.92	5000	1000
38104671	AS85049/138-08B	Electrostatic Dissipative	6.22	7.75	12.70	13.59	10.92	5000	1000
38107471	AS85049/138-08C	Conductive	6.22	7.75	12.70	13.59	10.92	5000	1000
38107721	AS85049/138-10A	LDPE	7.75	9.27	12.70	13.59	12.70	5000	1000
38107771	AS85049/138-10B	Electrostatic Dissipative	7.75	9.27	12.70	13.59	12.70	5000	1000
38113721	AS85049/138-10C	Conductive	7.75	9.27	12.70	13.59	12.70	5000	1000
38114631	AS85049/138-11A	LDPE	8.76	10.29	12.70	13.59	14.86	5000	1000
38116121	AS85049/138-11B	Electrostatic Dissipative	8.76	10.29	12.70	13.59	14.86	5000	1000
38117521	AS85049/138-11C	Conductive	8.76	10.29	12.70	13.59	14.86	5000	1000
38119151	AS85049/138-12A	LDPE	9.35	11.13	12.70	13.59	15.75	5000	1000
38120711	AS85049/138-12B	Electrostatic Dissipative	9.35	11.13	12.70	13.59	15.75	5000	1000
38122141	AS85049/138-12C	Conductive	9.35	11.13	12.70	13.59	15.75	5000	1000
38128411	AS85049/138-14A	LDPE	10.49	12.27	15.88	16.89	17.02	5000	1000
38130151	AS85049/138-14B	Electrostatic Dissipative	10.49	12.27	15.88	16.89	17.02	5000	1000
38131981	AS85049/138-14C	Conductive	10.49	12.27	15.88	16.89	17.02	5000	1000
38134691	AS85049/138-15A	LDPE	11.23	12.75	15.88	16.89	17.32	5000	1000
38141971	AS85049/138-15B	Electrostatic Dissipative	11.23	12.75	15.88	16.89	17.32	5000	1000
38143601	AS85049/138-15C	Conductive	11.23	12.75	15.88	16.89	17.32	5000	1000
38144931	AS85049/138-16A	LDPE	12.19	13.72	12.70	13.72	18.80	5000	1000

Caplugs
AS138-XX

9001
ISO certification

14001
ISO certification

16949
IATF certification

AS138 Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	AS85049/138 Ref	Material	Dimensions in inches					Packaging	
			d	D	h	H	D1	Carton quantity	Mini pack quantity
			Inside diameter	Outside diameter	Inside height	Outside height	Flange diameter		
38100521	AS85049/138-08A	LDPE	0.245	0.305	0.500	0.535	0.430	5000	1000
38104671	AS85049/138-08B	Electrostatic Dissipative	0.245	0.305	0.500	0.535	0.430	5000	1000
38107471	AS85049/138-08C	Conductive	0.245	0.305	0.500	0.535	0.430	5000	1000
38107721	AS85049/138-10A	LDPE	0.305	0.365	0.500	0.535	0.500	5000	1000
38107771	AS85049/138-10B	Electrostatic Dissipative	0.305	0.365	0.500	0.535	0.500	5000	1000
38113721	AS85049/138-10C	Conductive	0.305	0.365	0.500	0.535	0.500	5000	1000
38114631	AS85049/138-11A	LDPE	0.345	0.405	0.500	0.535	0.585	5000	1000
38116121	AS85049/138-11B	Electrostatic Dissipative	0.345	0.405	0.500	0.535	0.585	5000	1000
38117521	AS85049/138-11C	Conductive	0.345	0.405	0.500	0.535	0.585	5000	1000
38119151	AS85049/138-12A	LDPE	0.368	0.438	0.500	0.535	0.620	5000	1000
38120711	AS85049/138-12B	Electrostatic Dissipative	0.368	0.438	0.500	0.535	0.620	5000	1000
38122141	AS85049/138-12C	Conductive	0.368	0.438	0.500	0.535	0.620	5000	1000
38128411	AS85049/138-14A	LDPE	0.413	0.483	0.625	0.665	0.670	5000	1000
38130151	AS85049/138-14B	Electrostatic Dissipative	0.413	0.483	0.625	0.665	0.670	5000	1000
38131981	AS85049/138-14C	Conductive	0.413	0.483	0.625	0.665	0.670	5000	1000
38134691	AS85049/138-15A	LDPE	0.442	0.502	0.625	0.665	0.682	5000	1000
38141971	AS85049/138-15B	Electrostatic Dissipative	0.442	0.502	0.625	0.665	0.682	5000	1000
38143601	AS85049/138-15C	Conductive	0.442	0.502	0.625	0.665	0.682	5000	1000
38144931	AS85049/138-16A	LDPE	0.480	0.540	0.500	0.540	0.740	5000	1000



Caplugs
AS138-XX

9001
ISO certification

14001
ISO certification

16949
IATF certification

AS138 Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	AS85049/138 Ref	Material	Dimensions in mm					Packaging	
			d	D	h	H	D1	Carton quantity	Mini pack quantity
			Inside diameter	Outside diameter	Inside height	Outside height	Flange diameter		
38148421	AS85049/138-16B	Electrostatic Dissipative	12.19	13.72	12.70	13.72	18.80	5000	1000
38148451	AS85049/138-16C	Conductive	12.19	13.72	12.70	13.72	18.80	5000	1000
38149061	AS85049/138-18A	LDPE	13.46	15.11	15.88	16.89	19.05	5000	1000
38156861	AS85049/138-18B	Electrostatic Dissipative	13.46	15.11	15.88	16.89	19.05	5000	1000
38161291	AS85049/138-18C	Conductive	13.46	15.11	15.88	16.89	19.05	5000	1000
38165941	AS85049/138-19A	LDPE	14.48	16.00	15.88	16.89	20.57	5000	1000
38168081	AS85049/138-19B	Electrostatic Dissipative	14.48	16.00	15.88	16.89	20.57	5000	1000
38171611	AS85049/138-19C	Conductive	14.48	16.00	15.88	16.89	20.57	5000	1000
38171951	AS85049/138-20A	LDPE	15.37	16.89	12.70	13.72	21.34	5000	1000
38179221	AS85049/138-20B	Electrostatic Dissipative	15.37	16.89	12.70	13.72	21.34	5000	1000
38197551	AS85049/138-20C	Conductive	15.37	16.89	12.70	13.72	21.34	5000	1000
38205181	AS85049/138-22A	LDPE	16.64	18.16	15.88	16.89	21.84	5000	1000
38216591	AS85049/138-22B	Electrostatic Dissipative	16.64	18.16	15.88	16.89	21.84	5000	1000
38221321	AS85049/138-22C	Conductive	16.64	18.16	15.88	16.89	21.84	5000	1000
38229681	AS85049/138-24A	LDPE	18.29	19.69	12.70	13.72	24.64	5000	1000
38233401	AS85049/138-24B	Electrostatic Dissipative	18.29	19.69	12.70	13.72	24.64	5000	1000
38241371	AS85049/138-24C	Conductive	18.29	19.69	12.70	13.72	24.64	5000	1000
38246861	AS85049/138-26A	LDPE	19.94	21.46	15.88	17.02	26.19	4500	900
38255761	AS85049/138-26B	Electrostatic Dissipative	19.94	21.46	15.88	17.02	26.19	4500	900
38256251	AS85049/138-26C	Conductive	19.94	21.46	15.88	17.02	26.19	4500	900
38258321	AS85049/138-27A	LDPE	20.57	22.10	12.70	13.84	26.67	5000	1000
38260201	AS85049/138-27B	Electrostatic Dissipative	20.57	22.10	12.70	13.84	26.67	5000	1000
38266721	AS85049/138-27C	Conductive	20.57	22.10	12.70	13.84	26.67	5000	1000
38268401	AS85049/138-28A	LDPE	21.59	22.99	12.70	13.84	28.58	3500	700
38272711	AS85049/138-28B	Electrostatic Dissipative	21.59	22.99	12.70	13.84	28.58	3500	700
38273451	AS85049/138-28C	Conductive	21.59	22.99	12.70	13.84	28.58	3500	700
38273811	AS85049/138-29A	LDPE	22.68	24.46	15.88	17.02	28.58	3500	700
38274551	AS85049/138-29B	Electrostatic Dissipative	22.68	24.46	15.88	17.02	28.58	3500	700
38284801	AS85049/138-29C	Conductive	22.68	24.46	15.88	17.02	28.58	2500	500
38290661	AS85049/138-30A	LDPE	23.11	24.89	15.88	17.02	29.46	2500	500
38306491	AS85049/138-30B	Electrostatic Dissipative	23.11	24.89	15.88	17.02	29.46	2500	500
38311321	AS85049/138-30C	Conductive	23.11	24.89	15.88	17.02	29.46	2500	500



Caplugs
AS138-XX

9001
ISO certification

14001
ISO certification

16949
IATF certification

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

AS138 Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	AS85049/138 Ref	Material	Dimensions in inches					Packaging	
			d	D	h	H	D1	Carton quantity	Mini pack quantity
			Inside diameter	Outside diameter	Inside height	Outside height	Flange diameter		
38148421	AS85049/138-16B	Electrostatic Dissipative	0.480	0.540	0.500	0.540	0.740	5000	1000
38148451	AS85049/138-16C	Conductive	0.480	0.540	0.500	0.540	0.740	5000	1000
38149061	AS85049/138-18A	LDPE	0.530	0.595	0.625	0.665	0.750	5000	1000
38156861	AS85049/138-18B	Electrostatic Dissipative	0.530	0.595	0.625	0.665	0.750	5000	1000
38161291	AS85049/138-18C	Conductive	0.530	0.595	0.625	0.665	0.750	5000	1000
38165941	AS85049/138-19A	LDPE	0.570	0.630	0.625	0.665	0.810	5000	1000
38168081	AS85049/138-19B	Electrostatic Dissipative	0.570	0.630	0.625	0.665	0.810	5000	1000
38171611	AS85049/138-19C	Conductive	0.570	0.630	0.625	0.665	0.810	5000	1000
38171951	AS85049/138-20A	LDPE	0.605	0.665	0.500	0.540	0.840	5000	1000
38179221	AS85049/138-20B	Electrostatic Dissipative	0.605	0.665	0.500	0.540	0.840	5000	1000
38197551	AS85049/138-20C	Conductive	0.605	0.665	0.500	0.540	0.840	5000	1000
38205181	AS85049/138-22A	LDPE	0.655	0.715	0.625	0.665	0.860	5000	1000
38216591	AS85049/138-22B	Electrostatic Dissipative	0.655	0.715	0.625	0.665	0.860	5000	1000
38221321	AS85049/138-22C	Conductive	0.655	0.715	0.625	0.665	0.860	5000	1000
38229681	AS85049/138-24A	LDPE	0.720	0.775	0.500	0.540	0.970	5000	1000
38233401	AS85049/138-24B	Electrostatic Dissipative	0.720	0.775	0.500	0.540	0.970	5000	1000
38241371	AS85049/138-24C	Conductive	0.720	0.775	0.500	0.540	0.970	5000	1000
38246861	AS85049/138-26A	LDPE	0.785	0.845	0.625	0.670	1.031	4500	900
38255761	AS85049/138-26B	Electrostatic Dissipative	0.785	0.845	0.625	0.670	1.031	4500	900
38256251	AS85049/138-26C	Conductive	0.785	0.845	0.625	0.670	1.031	4500	900
38258321	AS85049/138-27A	LDPE	0.810	0.870	0.500	0.545	1.050	5000	1000
38260201	AS85049/138-27B	Electrostatic Dissipative	0.810	0.870	0.500	0.545	1.050	5000	1000
38266721	AS85049/138-27C	Conductive	0.810	0.870	0.500	0.545	1.050	5000	1000
38268401	AS85049/138-28A	LDPE	0.850	0.905	0.500	0.545	1.125	3500	700
38272711	AS85049/138-28B	Electrostatic Dissipative	0.850	0.905	0.500	0.545	1.125	3500	700
38273451	AS85049/138-28C	Conductive	0.850	0.905	0.500	0.545	1.125	3500	700
38273811	AS85049/138-29A	LDPE	0.893	0.963	0.625	0.670	1.125	3500	700
38274551	AS85049/138-29B	Electrostatic Dissipative	0.893	0.963	0.625	0.670	1.125	3500	700
38284801	AS85049/138-29C	Conductive	0.893	0.963	0.625	0.670	1.125	2500	500
38290661	AS85049/138-30A	LDPE	0.910	0.980	0.625	0.670	1.160	2500	500
38306491	AS85049/138-30B	Electrostatic Dissipative	0.910	0.980	0.625	0.670	1.160	2500	500
38311321	AS85049/138-30C	Conductive	0.910	0.980	0.625	0.670	1.160	2500	500



Caplugs
AS138-XX

9001
ISO certification

14001
ISO certification

16949
IATF certification

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

AS138 Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	AS85049/138 Ref	Material	Dimensions in mm					Packaging	
			d	D	h	H	D1	Carton quantity	Mini pack quantity
			Inside diameter	Outside diameter	Inside height	Outside height	Flange diameter		
38317331	AS85049/138-31A	LDPE	23.62	25.40	12.70	13.84	29.97	2500	500
38332391	AS85049/138-31B	Electrostatic Dissipative	23.62	25.40	12.70	13.84	29.97	2500	500
38336481	AS85049/138-31C	Conductive	23.62	25.40	12.70	13.84	29.97	2500	500
38338601	AS85049/138-33A	LDPE	24.71	26.29	12.70	13.84	30.99	2500	500
38338871	AS85049/138-33B	Electrostatic Dissipative	24.71	26.29	12.70	13.84	30.99	2500	500
38341751	AS85049/138-33C	Conductive	24.71	26.29	12.70	13.84	30.99	2500	500
38343511	AS85049/138-34A	LDPE	26.11	27.64	15.88	17.02	31.75	2500	500
38347231	AS85049/138-34B	Electrostatic Dissipative	26.11	27.64	15.88	17.02	31.75	2500	500
38348571	AS85049/138-34C	Conductive	26.11	27.64	15.88	17.02	31.75	2500	500
38359641	AS85049/138-35A	LDPE	26.97	28.75	12.70	13.84	33.32	2500	500
38362081	AS85049/138-35B	Electrostatic Dissipative	26.97	28.75	12.70	13.84	33.32	2500	500
38362901	AS85049/138-35C	Conductive	26.97	28.75	12.70	13.84	33.32	2500	500
38366251	AS85049/138-36A	LDPE	27.76	29.34	14.27	15.42	33.78	2000	400
38368031	AS85049/138-36B	Electrostatic Dissipative	27.76	29.34	14.27	15.42	33.78	2000	400
38369541	AS85049/138-36C	Conductive	27.76	29.34	14.27	15.42	33.78	2000	400
38370531	AS85049/138-37A	LDPE	28.45	30.23	15.88	17.02	34.93	2500	500
38376571	AS85049/138-37B	Electrostatic Dissipative	28.45	30.23	15.88	17.02	34.93	2500	500
38379071	AS85049/138-37C	Conductive	28.45	30.23	15.88	17.02	34.93	2500	500
38394741	AS85049/138-38A	LDPE	29.21	30.86	15.88	17.15	35.71	2500	500
38399681	AS85049/138-38B	Electrostatic Dissipative	29.21	30.86	15.88	17.15	35.71	2500	500
38403871	AS85049/138-38C	Conductive	29.21	30.86	15.88	17.15	35.71	2500	500
38412801	AS85049/138-39A	LDPE	29.97	31.75	14.27	15.54	36.53	2500	500
38415961	AS85049/138-39B	Electrostatic Dissipative	29.97	31.75	14.27	15.54	36.53	2500	500
38418871	AS85049/138-39C	Conductive	29.97	31.75	14.27	15.54	36.53	2500	500
38419921	AS85049/138-40A	LDPE	30.48	32.26	15.88	17.15	36.83	2500	500
38421241	AS85049/138-40B	Electrostatic Dissipative	30.48	32.26	15.88	17.15	36.83	2500	500
38426661	AS85049/138-40C	Conductive	30.48	32.26	15.88	17.15	36.83	2500	500
38429291	AS85049/138-41A	LDPE	31.27	33.05	14.27	15.54	37.21	2500	500
38430851	AS85049/138-41B	Electrostatic Dissipative	31.27	33.05	14.27	15.54	37.21	2500	500
38435411	AS85049/138-41C	Conductive	31.27	33.05	14.27	15.54	37.21	2500	500
38438801	AS85049/138-42A	LDPE	32.26	34.04	15.75	17.02	38.10	2500	500
38456001	AS85049/138-42B	Electrostatic Dissipative	32.26	34.04	15.75	17.02	38.10	2500	500



Caplugs
AS138-XX

9001
ISO certification

14001
ISO certification

16949
IATF certification

AS138 Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	AS85049/138 Ref	Material	Dimensions in inches					Packaging	
			d	D	h	H	D1	Carton quantity	Mini pack quantity
			Inside diameter	Outside diameter	Inside height	Outside height	Flange diameter		
38317331	AS85049/138-31A	LDPE	0.930	1.000	0.500	0.545	1.180	2500	500
38332391	AS85049/138-31B	Electrostatic Dissipative	0.930	1.000	0.500	0.545	1.180	2500	500
38336481	AS85049/138-31C	Conductive	0.930	1.000	0.500	0.545	1.180	2500	500
38338601	AS85049/138-33A	LDPE	0.973	1.035	0.500	0.545	1.220	2500	500
38338871	AS85049/138-33B	Electrostatic Dissipative	0.973	1.035	0.500	0.545	1.220	2500	500
38341751	AS85049/138-33C	Conductive	0.973	1.035	0.500	0.545	1.220	2500	500
38343511	AS85049/138-34A	LDPE	1.028	1.088	0.625	0.670	1.250	2500	500
38347231	AS85049/138-34B	Electrostatic Dissipative	1.028	1.088	0.625	0.670	1.250	2500	500
38348571	AS85049/138-34C	Conductive	1.028	1.088	0.625	0.670	1.250	2500	500
38359641	AS85049/138-35A	LDPE	1.062	1.132	0.500	0.545	1.312	2500	500
38362081	AS85049/138-35B	Electrostatic Dissipative	1.062	1.132	0.500	0.545	1.312	2500	500
38362901	AS85049/138-35C	Conductive	1.062	1.132	0.500	0.545	1.312	2500	500
38366251	AS85049/138-36A	LDPE	1.093	1.155	0.562	0.607	1.330	2000	400
38368031	AS85049/138-36B	Electrostatic Dissipative	1.093	1.155	0.562	0.607	1.330	2000	400
38369541	AS85049/138-36C	Conductive	1.093	1.155	0.562	0.607	1.330	2000	400
38370531	AS85049/138-37A	LDPE	1.120	1.190	0.625	0.670	1.375	2500	500
38376571	AS85049/138-37B	Electrostatic Dissipative	1.120	1.190	0.625	0.670	1.375	2500	500
38379071	AS85049/138-37C	Conductive	1.120	1.190	0.625	0.670	1.375	2500	500
38394741	AS85049/138-38A	LDPE	1.150	1.215	0.625	0.675	1.406	2500	500
38399681	AS85049/138-38B	Electrostatic Dissipative	1.150	1.215	0.625	0.675	1.406	2500	500
38403871	AS85049/138-38C	Conductive	1.150	1.215	0.625	0.675	1.406	2500	500
38412801	AS85049/138-39A	LDPE	1.180	1.250	0.562	0.612	1.438	2500	500
38415961	AS85049/138-39B	Electrostatic Dissipative	1.180	1.250	0.562	0.612	1.438	2500	500
38418871	AS85049/138-39C	Conductive	1.180	1.250	0.562	0.612	1.438	2500	500
38419921	AS85049/138-40A	LDPE	1.200	1.270	0.625	0.675	1.450	2500	500
38421241	AS85049/138-40B	Electrostatic Dissipative	1.200	1.270	0.625	0.675	1.450	2500	500
38426661	AS85049/138-40C	Conductive	1.200	1.270	0.625	0.675	1.450	2500	500
38429291	AS85049/138-41A	LDPE	1.231	1.301	0.562	0.612	1.465	2500	500
38430851	AS85049/138-41B	Electrostatic Dissipative	1.231	1.301	0.562	0.612	1.465	2500	500
38435411	AS85049/138-41C	Conductive	1.231	1.301	0.562	0.612	1.465	2500	500
38438801	AS85049/138-42A	LDPE	1.270	1.340	0.620	0.670	1.500	2500	500
38456001	AS85049/138-42B	Electrostatic Dissipative	1.270	1.340	0.620	0.670	1.500	2500	500



Caplugs
AS138-XX

9001
ISO certification

14001
ISO certification

16949
IATF certification

AS138 Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	AS85049/138 Ref	Material	Dimensions in mm					Packaging	
			d	D	h	H	D1	Carton quantity	Mini pack quantity
			Inside diameter	Outside diameter	Inside height	Outside height	Flange diameter		
38464901	AS85049/138-42C	Conductive	32.26	34.04	15.75	17.02	38.10	2500	500
38472541	AS85049/138-43A	LDPE	32.94	34.72	15.88	17.15	39.29	2500	500
38477091	AS85049/138-43B	Electrostatic Dissipative	32.94	34.72	15.88	17.15	39.29	2500	500
38480471	AS85049/138-43C	Conductive	32.94	34.72	15.88	17.15	39.29	2500	500
38489241	AS85049/138-44A	LDPE	33.53	35.31	14.27	15.54	39.88	2500	500
38492881	AS85049/138-44B	Electrostatic Dissipative	33.53	35.31	14.27	15.54	39.88	2500	500
38496991	AS85049/138-44C	Conductive	33.53	35.31	14.27	15.54	39.88	2500	500
38501241	AS85049/138-45A	LDPE	34.04	35.81	14.27	15.54	40.39	2500	500
38501401	AS85049/138-45B	Electrostatic Dissipative	34.04	35.81	14.27	15.54	40.39	2500	500
38513871	AS85049/138-45C	Conductive	34.04	35.81	14.27	15.54	40.39	2500	500
38519121	AS85049/138-46A	LDPE	34.54	36.32	15.88	17.15	40.89	1000	200
38520621	AS85049/138-46B	Electrostatic Dissipative	34.54	36.32	15.88	17.15	40.89	1000	200
38520851	AS85049/138-46C	Conductive	34.54	36.32	15.88	17.15	40.89	1000	200
38523031	AS85049/138-47A	LDPE	35.31	37.08	15.75	17.02	41.66	1000	200
38527191	AS85049/138-47B	Electrostatic Dissipative	35.31	37.08	15.75	17.02	41.66	1000	200
38533011	AS85049/138-47C	Conductive	35.31	37.08	15.75	17.02	41.66	1000	200
38535061	AS85049/138-48A	LDPE	35.97	37.74	14.22	15.49	42.42	1000	200
38536761	AS85049/138-48B	Electrostatic Dissipative	35.97	37.74	14.22	15.49	42.42	1000	200
38543481	AS85049/138-48C	Conductive	35.97	37.74	14.22	15.49	42.42	1000	200
38543641	AS85049/138-49A	LDPE	36.83	38.61	15.88	17.15	43.18	1000	200
38546831	AS85049/138-49B	Electrostatic Dissipative	36.83	38.61	15.88	17.15	43.18	1000	200
38557181	AS85049/138-49C	Conductive	36.83	38.61	15.88	17.15	43.18	1000	200
38560311	AS85049/138-50A	LDPE	37.16	38.94	14.27	15.54	43.18	1500	300
38562431	AS85049/138-50B	Electrostatic Dissipative	37.16	38.94	14.27	15.54	43.18	1500	300
38567311	AS85049/138-50C	Conductive	37.16	38.94	14.27	15.54	43.18	1500	300
38567551	AS85049/138-51A	LDPE	39.12	40.89	15.75	17.02	45.97	1000	200
38568521	AS85049/138-51B	Electrostatic Dissipative	39.12	40.89	15.75	17.02	45.97	1000	200
38569871	AS85049/138-51C	Conductive	39.12	40.89	15.75	17.02	45.97	1000	200
38571841	AS85049/138-52A	LDPE	39.88	41.66	14.27	15.54	46.23	1000	200
38573301	AS85049/138-52B	Electrostatic Dissipative	39.88	41.66	14.27	15.54	46.23	1000	200
38575031	AS85049/138-52C	Conductive	39.88	41.66	14.27	15.54	46.23	1000	200
38577231	AS85049/138-53A	LDPE	40.64	42.42	14.27	15.67	46.99	1000	200



Caplugs
AS138-XX

9001
ISO certification

14001
ISO certification

16949
IATF certification

AS138 Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	AS85049/138 Ref	Material	Dimensions in inches					Packaging	
			d	D	h	H	D1	Carton quantity	Mini pack quantity
			Inside diameter	Outside diameter	Inside height	Outside height	Flange diameter		
38464901	AS85049/138-42C	Conductive	1.270	1.340	0.620	0.670	1.500	2500	500
38472541	AS85049/138-43A	LDPE	1.297	1.367	0.625	0.675	1.547	2500	500
38477091	AS85049/138-43B	Electrostatic Dissipative	1.297	1.367	0.625	0.675	1.547	2500	500
38480471	AS85049/138-43C	Conductive	1.297	1.367	0.625	0.675	1.547	2500	500
38489241	AS85049/138-44A	LDPE	1.320	1.390	0.562	0.612	1.570	2500	500
38492881	AS85049/138-44B	Electrostatic Dissipative	1.320	1.390	0.562	0.612	1.570	2500	500
38496991	AS85049/138-44C	Conductive	1.320	1.390	0.562	0.612	1.570	2500	500
38501241	AS85049/138-45A	LDPE	1.340	1.410	0.562	0.612	1.590	2500	500
38501401	AS85049/138-45B	Electrostatic Dissipative	1.340	1.410	0.562	0.612	1.590	2500	500
38513871	AS85049/138-45C	Conductive	1.340	1.410	0.562	0.612	1.590	2500	500
38519121	AS85049/138-46A	LDPE	1.360	1.430	0.625	0.675	1.610	1000	200
38520621	AS85049/138-46B	Electrostatic Dissipative	1.360	1.430	0.625	0.675	1.610	1000	200
38520851	AS85049/138-46C	Conductive	1.360	1.430	0.625	0.675	1.610	1000	200
38523031	AS85049/138-47A	LDPE	1.390	1.460	0.620	0.670	1.640	1000	200
38527191	AS85049/138-47B	Electrostatic Dissipative	1.390	1.460	0.620	0.670	1.640	1000	200
38533011	AS85049/138-47C	Conductive	1.390	1.460	0.620	0.670	1.640	1000	200
38535061	AS85049/138-48A	LDPE	1.416	1.486	0.560	0.610	1.670	1000	200
38536761	AS85049/138-48B	Electrostatic Dissipative	1.416	1.486	0.560	0.610	1.670	1000	200
38543481	AS85049/138-48C	Conductive	1.416	1.486	0.560	0.610	1.670	1000	200
38543641	AS85049/138-49A	LDPE	1.450	1.520	0.625	0.675	1.700	1000	200
38546831	AS85049/138-49B	Electrostatic Dissipative	1.450	1.520	0.625	0.675	1.700	1000	200
38557181	AS85049/138-49C	Conductive	1.450	1.520	0.625	0.675	1.700	1000	200
38560311	AS85049/138-50A	LDPE	1.463	1.533	0.562	0.612	1.700	1500	300
38562431	AS85049/138-50B	Electrostatic Dissipative	1.463	1.533	0.562	0.612	1.700	1500	300
38567311	AS85049/138-50C	Conductive	1.463	1.533	0.562	0.612	1.700	1500	300
38567551	AS85049/138-51A	LDPE	1.540	1.610	0.620	0.670	1.810	1000	200
38568521	AS85049/138-51B	Electrostatic Dissipative	1.540	1.610	0.620	0.670	1.810	1000	200
38569871	AS85049/138-51C	Conductive	1.540	1.610	0.620	0.670	1.810	1000	200
38571841	AS85049/138-52A	LDPE	1.570	1.640	0.562	0.612	1.820	1000	200
38573301	AS85049/138-52B	Electrostatic Dissipative	1.570	1.640	0.562	0.612	1.820	1000	200
38575031	AS85049/138-52C	Conductive	1.570	1.640	0.562	0.612	1.820	1000	200
38577231	AS85049/138-53A	LDPE	1.600	1.670	0.562	0.617	1.850	1000	200



Caplugs
AS138-XX

9001
ISO certification

14001
ISO certification

16949
IATF certification

AS138 Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	AS85049/138 Ref	Material	Dimensions in mm					Packaging	
			d	D	h	H	D1	Carton quantity	Mini pack quantity
			Inside diameter	Outside diameter	Inside height	Outside height	Flange diameter		
38585651	AS85049/138-53B	Electrostatic Dissipative	40.64	42.42	14.27	15.67	46.99	1000	200
38587251	AS85049/138-53C	Conductive	40.64	42.42	14.27	15.67	46.99	1000	200
38588221	AS85049/138-55A	LDPE	41.86	43.64	15.75	17.15	47.75	1000	200
38589511	AS85049/138-55B	Electrostatic Dissipative	41.86	43.64	15.75	17.15	47.75	1000	200
38591871	AS85049/138-55C	Conductive	41.86	43.64	15.75	17.15	47.75	1000	200
38592931	AS85049/138-57A	LDPE	43.56	45.47	14.27	15.67	49.53	1000	200
38594181	AS85049/138-57B	Electrostatic Dissipative	43.56	45.47	14.27	15.67	49.53	1000	200
38597301	AS85049/138-57C	Conductive	43.56	45.47	14.27	15.67	49.53	1000	200
38600741	AS85049/138-60A	LDPE	44.96	46.74	14.27	15.67	51.31	1000	200
38605581	AS85049/138-60B	Electrostatic Dissipative	44.96	46.74	14.27	15.67	51.31	1000	200
38608181	AS85049/138-60C	Conductive	44.96	46.74	14.27	15.67	51.31	1000	200
38610681	AS85049/138-63A	LDPE	48.01	50.04	15.75	17.15	53.85	1000	200
38620961	AS85049/138-63B	Electrostatic Dissipative	48.01	50.04	15.75	17.15	53.85	1000	200
38631881	AS85049/138-63C	Conductive	48.01	50.04	15.75	17.15	53.85	1000	200
38639621	AS85049/138-65A	LDPE	49.91	51.82	14.22	15.62	56.39	1000	200
38651831	AS85049/138-65B	Electrostatic Dissipative	49.91	51.82	14.22	15.62	56.39	1000	200
38652711	AS85049/138-65C	Conductive	49.91	51.82	14.22	15.62	56.39	1000	200
38656401	AS85049/138-71A	LDPE	54.36	56.13	15.75	17.15	59.44	1000	200
38658811	AS85049/138-71B	Electrostatic Dissipative	54.36	56.13	15.75	17.15	59.44	1000	200
38659331	AS85049/138-71C	Conductive	54.36	56.13	15.75	17.15	59.44	1000	200
38666851	AS85049/138-74A	LDPE	56.26	58.17	15.24	16.64	61.85	1000	200
38675751	AS85049/138-74B	Electrostatic Dissipative	56.26	58.17	15.24	16.64	61.85	1000	200
38683271	AS85049/138-74C	Conductive	56.26	58.17	15.24	16.64	61.85	1000	200
38688051	AS85049/138-75A	LDPE	57.91	59.82	15.24	16.64	63.50	1000	200
38694121	AS85049/138-75B	Electrostatic Dissipative	57.91	59.82	15.24	16.64	63.50	1000	200
38698561	AS85049/138-75C	Conductive	57.91	59.82	15.24	16.64	63.50	1000	200
38699861	AS85049/138-77A	LDPE	60.45	62.23	15.75	17.27	66.04	700	140
38702081	AS85049/138-77B	Electrostatic Dissipative	60.45	62.23	15.75	17.27	66.04	700	140
38707091	AS85049/138-77C	Conductive	60.45	62.23	15.75	17.27	66.04	700	140
38712311	AS85049/138-81A	LDPE	61.98	64.26	15.24	16.76	67.56	500	100
38716321	AS85049/138-81B	Electrostatic Dissipative	61.98	64.26	15.24	16.76	67.56	500	100
38724901	AS85049/138-81C	Conductive	61.98	64.26	15.24	16.76	67.56	500	100



Caplugs
AS138-XX

9001
ISO certification

14001
ISO certification

16949
IATF certification

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

AS138 Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	AS85049/138 Ref	Material	Dimensions in inches					Packaging	
			d	D	h	H	D1	Carton quantity	Mini pack quantity
			Inside diameter	Outside diameter	Inside height	Outside height	Flange diameter		
38585651	AS85049/138-53B	Electrostatic Dissipative	1.600	1.670	0.562	0.617	1.850	1000	200
38587251	AS85049/138-53C	Conductive	1.600	1.670	0.562	0.617	1.850	1000	200
38588221	AS85049/138-55A	LDPE	1.648	1.718	0.620	0.675	1.880	1000	200
38589511	AS85049/138-55B	Electrostatic Dissipative	1.648	1.718	0.620	0.675	1.880	1000	200
38591871	AS85049/138-55C	Conductive	1.648	1.718	0.620	0.675	1.880	1000	200
38592931	AS85049/138-57A	LDPE	1.715	1.790	0.562	0.617	1.950	1000	200
38594181	AS85049/138-57B	Electrostatic Dissipative	1.715	1.790	0.562	0.617	1.950	1000	200
38597301	AS85049/138-57C	Conductive	1.715	1.790	0.562	0.617	1.950	1000	200
38600741	AS85049/138-60A	LDPE	1.770	1.840	0.562	0.617	2.020	1000	200
38605581	AS85049/138-60B	Electrostatic Dissipative	1.770	1.840	0.562	0.617	2.020	1000	200
38608181	AS85049/138-60C	Conductive	1.770	1.840	0.562	0.617	2.020	1000	200
38610681	AS85049/138-63A	LDPE	1.890	1.970	0.620	0.675	2.120	1000	200
38620961	AS85049/138-63B	Electrostatic Dissipative	1.890	1.970	0.620	0.675	2.120	1000	200
38631881	AS85049/138-63C	Conductive	1.890	1.970	0.620	0.675	2.120	1000	200
38639621	AS85049/138-65A	LDPE	1.965	2.040	0.560	0.615	2.220	1000	200
38651831	AS85049/138-65B	Electrostatic Dissipative	1.965	2.040	0.560	0.615	2.220	1000	200
38652711	AS85049/138-65C	Conductive	1.965	2.040	0.560	0.615	2.220	1000	200
38656401	AS85049/138-71A	LDPE	2.140	2.210	0.620	0.675	2.340	1000	200
38658811	AS85049/138-71B	Electrostatic Dissipative	2.140	2.210	0.620	0.675	2.340	1000	200
38659331	AS85049/138-71C	Conductive	2.140	2.210	0.620	0.675	2.340	1000	200
38666851	AS85049/138-74A	LDPE	2.215	2.290	0.600	0.655	2.435	1000	200
38675751	AS85049/138-74B	Electrostatic Dissipative	2.215	2.290	0.600	0.655	2.435	1000	200
38683271	AS85049/138-74C	Conductive	2.215	2.290	0.600	0.655	2.435	1000	200
38688051	AS85049/138-75A	LDPE	2.280	2.355	0.600	0.655	2.500	1000	200
38694121	AS85049/138-75B	Electrostatic Dissipative	2.280	2.355	0.600	0.655	2.500	1000	200
38698561	AS85049/138-75C	Conductive	2.280	2.355	0.600	0.655	2.500	1000	200
38699861	AS85049/138-77A	LDPE	2.380	2.450	0.620	0.680	2.600	700	140
38702081	AS85049/138-77B	Electrostatic Dissipative	2.380	2.450	0.620	0.680	2.600	700	140
38707091	AS85049/138-77C	Conductive	2.380	2.450	0.620	0.680	2.600	700	140
38712311	AS85049/138-81A	LDPE	2.440	2.530	0.600	0.660	2.660	500	100
38716321	AS85049/138-81B	Electrostatic Dissipative	2.440	2.530	0.600	0.660	2.660	500	100
38724901	AS85049/138-81C	Conductive	2.440	2.530	0.600	0.660	2.660	500	100



Caplugs
AS138-XX

9001
ISO certification

14001
ISO certification

16949
IATF certification

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

AS138 Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	AS85049/138 Ref	Material	Dimensions in mm					Packaging	
			d	D	h	H	D1	Carton quantity	Mini pack quantity
			Inside diameter	Outside diameter	Inside height	Outside height	Flange diameter		
38729221	AS85049/138-87A	LDPE	66.80	68.58	15.75	17.27	73.15	500	100
38734261	AS85049/138-87B	Electrostatic Dissipative	66.80	68.58	15.75	17.27	73.15	500	100
38736601	AS85049/138-87C	Conductive	66.80	68.58	15.75	17.27	73.15	500	100
38737921	AS85049/138-90A	LDPE	69.09	71.42	15.24	16.76	75.18	500	100
38740161	AS85049/138-90B	Electrostatic Dissipative	69.09	71.42	15.24	16.76	75.18	500	100
38743011	AS85049/138-90C	Conductive	69.09	71.42	15.24	16.76	75.18	500	100
38744921	AS85049/138-96A	LDPE	73.15	74.93	15.75	17.27	79.25	500	100
38746571	AS85049/138-96B	Electrostatic Dissipative	73.15	74.93	15.75	17.27	79.25	500	100
38749011	AS85049/138-96C	Conductive	73.15	74.93	15.75	17.27	79.25	500	100
38751721	AS85049/138-98A	LDPE	75.18	77.47	15.24	16.76	81.79	500	100
38755201	AS85049/138-98B	Electrostatic Dissipative	75.18	77.47	15.24	16.76	81.79	500	100
38759321	AS85049/138-98C	Conductive	75.18	77.47	15.24	16.76	81.79	500	100
Part Number	AS85049/138 Ref	Material	d	D	h	H	D1	Carton quantity	Mini pack quantity
			Inside diameter	Outside diameter	Inside height	Outside height	Flange diameter		
			Dimensions in mm					Packaging	



Caplugs
AS138-XX

9001
ISO certification

14001
ISO certification

16949
IATF certification

AS138 Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	AS85049/138 Ref	Material	Dimensions in inches					Packaging	
			d	D	h	H	D1	Carton quantity	Mini pack quantity
			Inside diameter	Outside diameter	Inside height	Outside height	Flange diameter		
38729221	AS85049/138-87A	LDPE	2.630	2.700	0.620	0.680	2.880	500	100
38734261	AS85049/138-87B	Electrostatic Dissipative	2.630	2.700	0.620	0.680	2.880	500	100
38736601	AS85049/138-87C	Conductive	2.630	2.700	0.620	0.680	2.880	500	100
38737921	AS85049/138-90A	LDPE	2.720	2.812	0.600	0.660	2.960	500	100
38740161	AS85049/138-90B	Electrostatic Dissipative	2.720	2.812	0.600	0.660	2.960	500	100
38743011	AS85049/138-90C	Conductive	2.720	2.812	0.600	0.660	2.960	500	100
38744921	AS85049/138-96A	LDPE	2.880	2.950	0.620	0.680	3.120	500	100
38746571	AS85049/138-96B	Electrostatic Dissipative	2.880	2.950	0.620	0.680	3.120	500	100
38749011	AS85049/138-96C	Conductive	2.880	2.950	0.620	0.680	3.120	500	100
38751721	AS85049/138-98A	LDPE	2.960	3.050	0.600	0.660	3.220	500	100
38755201	AS85049/138-98B	Electrostatic Dissipative	2.960	3.050	0.600	0.660	3.220	500	100
38759321	AS85049/138-98C	Conductive	2.960	3.050	0.600	0.660	3.220	500	100
Part Number	AS85049/138 Ref	Material	d	D	h	H	D1	Carton quantity	Mini pack quantity
			Inside diameter	Outside diameter	Inside height	Outside height	Flange diameter		
			Dimensions in inches					Packaging	



Caplugs
AS138-XX

9001
ISO certification

14001
ISO certification

16949
IATF certification

IKQ Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Push-On Protection Cap

The IKQ Series non-threaded cap is sturdy and flexible, with a careful interior design that removes the need for threading and fits smoothly, snugly, yet simply for reliable protection of industrial components. Easy application and removal suit the cap for environments needing speed and efficiency or regular inspection and maintenance access.

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°**C** / 150°**F**

***Hexagonal cap to cover standard nuts**

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm				Dimensions in inches				Packaging
	SW	h1	h	D	SW	h1	h	D	
	Nut size	Inside height	Inside height	Outside diameter	Nut size	Inside height	Inside height	Outside diameter	Carton quantity
13356781	7.00	4.00	7.00	9.00	0.276	0.157	0.276	0.354	10000
13414431	13.00	7.50	13.00	16.70	0.512	0.295	0.512	0.657	2000
13458841	14.00	7.50	14.00	18.00	0.551	0.295	0.551	0.709	2000
13475691	17.00	9.00	16.50	21.50	0.669	0.354	0.650	0.846	1000
13634681	19.00	11.20	18.50	23.00	0.748	0.441	0.728	0.906	800
13969621	22.00	11.50	22.00	27.00	0.866	0.453	0.866	1.063	500
13970301	24.00	14.00	23.50	29.20	0.945	0.551	0.925	1.150	400

Part Number	SW	h1	h	D	SW	h1	h	D	Carton quantity
	Nut size	Inside height	Inside height	Outside diameter	Nut size	Inside height	Inside height	Outside diameter	
	Dimensions in mm				Dimensions in inches				Packaging

GK Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Wraparound Grip Cap

The GK Series grip cap has a wraparound sealing lip for flexible fitting to threaded components, pipe ends and hoses. The tactile surface enables grip, even if handler dexterity is restricted, with quick positioning and removal. A tight seal resists industrial fluids and particulates, while the cushioned cover protects against impact and abrasion.

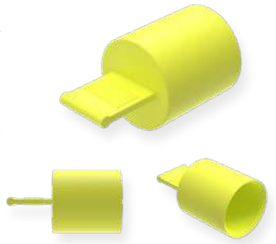

Material: Thermoplastic Elastomer (TPE)
Temperature Resistance: 149°**C** / 300°**F**

***Also available in other materials.**



Yellow (-**YL**)
RAL 1016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	d	h	D	d	h	D	
	Inside diameter	Inside height	Outside diameter	Inside diameter	Inside height	Outside diameter	Quanitity per Bag
13138914	3,90	20,00	7,00	0,154	0,787	0,276	1000
13203024	4,80	20,00	7,50	0,189	0,787	0,295	1000
13675854	5,80	20,00	9,00	0,228	0,787	0,354	1000
13232694	6,80	20,00	9,80	0,268	0,787	0,386	1000
13252064	7,90	20,00	10,80	0,311	0,787	0,425	1000
13263214	8,90	20,00	11,60	0,350	0,787	0,457	1000
13291834	9,50	20,00	13,00	0,374	0,787	0,512	1000
13381784	10,70	20,00	13,50	0,421	0,787	0,531	1000
13399874	11,70	20,00	15,00	0,461	0,787	0,591	1000
13431004	12,70	20,00	16,00	0,500	0,787	0,630	1000
13451904	13,80	20,00	17,00	0,543	0,787	0,669	1000
13462204	14,80	20,00	18,00	0,583	0,787	0,709	1000
13474154	15,80	20,00	19,00	0,622	0,787	0,748	1000
13584924	16,80	20,00	20,00	0,661	0,787	0,787	1000
13675164	17,80	20,00	21,00	0,701	0,787	0,827	1000
13723644	19,80	20,00	23,00	0,780	0,787	0,906	1000
13762074	21,80	20,00	24,50	0,858	0,787	0,965	1000
13795694	23,80	20,00	27,50	0,937	0,787	1,083	1000

Part Number	d	h	D	d	h	D	Quanitity per Bag
	Inside diameter	Inside height	Outside diameter	Inside diameter	Inside height	Outside diameter	
	Dimensions in mm			Dimensions in inches			Packaging

PLO Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Open-Tethered Cap

The PLO Series open-tethered cap incorporates a tab for grip, easy application, or removal. The tethered design's additional built-in securing mechanism anchors very firmly, reducing unwanted movement and equipment disturbance. Temperature, chemical, and mechanical stress resistance ensure demanding environments performance.

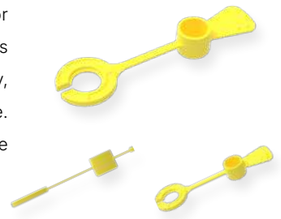

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°**C** / 150°**F**

***Also available as a closed-ring version**

Yellow (-**YL**)
RAL 1018

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm				Dimensions in inches				Packaging	
	d1	h	d2	D	d1	h	d2	D		
	Inside diameter	inside height	Retaining ring inside diameter	Retaining ring Outside diameter	Inside diameter	inside height	Retaining ring inside diameter	Retaining ring Outside diameter	Carton quantity	Colour
13112231	7.60	6.50	7.20	16.85	0.299	0.256	0.283	0.663	1500	Yellow
13205731	9.70	6.35	9.00	22.25	0.382	0.250	0.354	0.876	1500	Yellow
13332061	11.70	9.95	11.40	23.90	0.461	0.392	0.449	0.941	1500	Yellow
13697211	13.00	8.50	14.00	23.65	0.512	0.335	0.551	0.931	1500	Green
13828261	13.70	10.20	13.20	25.50	0.539	0.402	0.520	1.004	1500	Yellow
13983921	15.70	9.85	15.45	27.90	0.618	0.388	0.608	1.098	1500	Red

Part Number	d1	h	d2	D	d1	h	d2	D	Carton quantity	Colour
	Inside diameter	inside height	Retaining ring inside diameter	Retaining ring Outside diameter	Inside diameter	inside height	Retaining ring inside diameter	Retaining ring Outside diameter		
	Dimensions in mm				Dimensions in inches				Packaging	

PLC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Close-Tethered Cap

The PLC Series close-tethered cap is designed for situations where long-term or permanent protection is needed for components. While not having a tab, the cap is easy to apply for a secure and lasting fit. The absence of an open hole creates a robust barrier from contaminants and a built-in tether enables strong attachment.

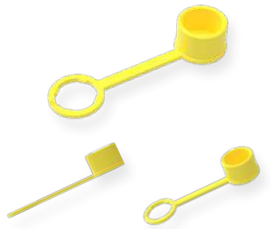

Material: Thermoplastic Elastomer (TPE)
Temperature Resistance: 135°**C** / 275°**F**

***Also available as an open ringed version with a tab**

Yellow (-**YL**)
RAL 1018

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm				Dimensions in inches				Packaging	
	d2	L	d1	D	d2	L	d1	D		
	Inside diameter	Centres	Retaining ring inside diameter	Outside diameter	Inside diameter	Centres	Retaining ring inside diameter	Outside diameter	Carton quantity	Colour
13132071	9.50	45.00	10.00	12.60	0.374	1.772	0.394	0.496	1750	Yellow
13179181	9.75	85.00	10.00	12.30	0.384	3.346	0.394	0.484	1500	Yellow
13185091	9.50	104.50	10.00	12.30	0.374	4.114	0.394	0.484	1200	Red
13378751	11.30	85.00	12.15	14.30	0.445	3.346	0.478	0.563	1200	Yellow
13410411	11.70	102.50	12.30	14.30	0.461	4.035	0.484	0.563	1000	Yellow
13428221	12.00	45.00	12.45	14.50	0.472	1.772	0.490	0.571	1500	Blue
13491631	13.50	45.00	14.00	17.10	0.531	1.772	0.551	0.673	1200	Blue
13607201	13.50	85.00	14.00	17.10	0.531	3.346	0.551	0.673	1000	Green
13816521	15.50	45.00	16.00	19.00	0.610	1.772	0.630	0.748	1000	Green
13958991	15.50	80.00	16.00	19.00	0.610	3.150	0.630	0.748	1000	Yellow

Part Number	d2	L	d1	D	d2	L	d1	D	Carton quantity	Colour
	Inside diameter	Centres	Retaining ring inside diameter	Outside diameter	Inside diameter	Centres	Retaining ring inside diameter	Outside diameter		
	Dimensions in mm				Dimensions in inches				Packaging	

PQN Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Ribbed Cap

The PQN Series ribbed cap is designed with a robust exterior for increased strength and grip during application and removal. Secure protection of components and equipment is matched by ease of use. The cap is ideal for cramped and busy operating areas. It also reduces handling time when wet surfaces or gloves limit operator dexterity.



Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°**C** / 150°**F**

***Also available as a tabbed version**


Yellow (-**YL**)
RAL 1018

Black (-**BK**)
RAL 9005


Green (-**GN**)
RAL 6018


Red (-**RD**)
RAL 3020

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches		Packaging
	d	h	d	h	Carton quantity
	Inside diameter	Inside height	Inside diameter	Inside height	
13575821	6.50	9.00	0.256	0.354	2000

Part Number	d	h	d	h	Carton quantity
	Inside diameter	Inside height	Inside diameter	Inside height	
	Dimensions in mm		Dimensions in inches		Packaging

PQT Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Tethering Hole Tab Cap

The PQT Series cap has an innovative tab design with built-in tethering hole, to ensure firm attachment to protected surfaces. A flexible yet tight seal provides robust protection from contaminants, while guarding against accidental contact with other components in an assembly. The tethered tab enables quick, easy cap removal and reapplication.

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°**C** / 150°**F**

***Also available without the tab**

Black (-**BK**)
RAL 9005

Green (-**GN**)
RAL 6018

Red (-**RD**)
RAL 3020

Yellow (-**YL**)
RAL 1018

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	d	h	L	d	h	L	Carton quantity
	Inside diameter	Inside height	Centres	Inside diameter	Inside height	Centres	
13205771	6.50	9.00	12.00	0.256	0.354	0.472	2000

Part Number	d	h	L	d	h	L	Carton quantity
	Inside diameter	Inside height	Centres	Inside dia-meter	Inside height	Centres	
	Dimensions in mm			Dimensions in inches			Packaging

VC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Dome Sealing Cap

The VC Series is designed with a top that extends into a cylindrical skirt, robustly sealing protected component ends. Flexible construction withstands fitting pressure, without tearing or deforming, enabling a tight barrier against debris and contaminants. A smooth internal surface minimises application damage risk, to maintain component quality.

Material: Poly Vinyl Chloride (PVC)
Temperature Resistance: 176°**C** / 350°**F**

***This product can be custom printed with your logo**

Black (-**BK**)
RAL 9005

Blue (-**BL**)
RAL 5017

Grey (-**GY**)
RAL 7036

Red (-**RD**)
RAL 3000

Yellow (-**YL**)
RAL 1021

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





9001
ISO certification

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only.	Carton quantity	Mini pack quantity
11101561			1.58	13.00	4.38	5000	1000
11102631		2-56 UNC, 2-64 UNF	2.00	13.00	4.00	5000	1000
11103151	M3		2.80	13.00	4.80	5000	1000
11105641			3.00	13.00	5.60	5000	1000
11108001		5-40 UNC, 5-44 UNF	3.15	13.00	5.75	5000	1000
11109071			3.50	13.00	6.10	5000	1000
11109101			3.50	19.00	6.10	5000	1000
11110941		8-32 UNC, 8-36 UNF	3.90	13.00	6.50	5000	1000
11112921		8-32 UNC, 8-36 UNF	3.90	19.00	6.50	5000	1000
11113521			4.00	13.00	6.60	5000	1000
11114951			4.00	25.00	6.60	5000	1000
11117541			4.37	13.00	6.97	5000	1000
11118981			4.37	19.00	6.97	5000	1000
11121641			4.50	13.00	7.10	5000	1000
11124321			4.50	25.00	7.10	5000	1000
11124461	M5		4.80	13.00	7.40	5000	1000
11125741	M5		4.80	19.00	7.40	5000	1000
11125771			5.00	13.00	7.60	5000	1000
11126801			5.00	19.00	7.60	5000	1000
11132921			5.20	13.00	7.80	5000	1000
11135671			5.20	19.00	7.80	5000	1000

VC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88





9001
ISO certification

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only.	Carton quantity	Mini pack quantity
11101561			0.062	0.512	0.172	5000	1000
11102631		2-56 UNC, 2-64 UNF	0.079	0.512	0.157	5000	1000
11103151	M3		0.110	0.512	0.189	5000	1000
11105641			0.118	0.512	0.220	5000	1000
11108001		5-40 UNC, 5-44 UNF	0.124	0.512	0.226	5000	1000
11109071			0.138	0.512	0.240	5000	1000
11109101			0.138	0.748	0.240	5000	1000
11110941		8-32 UNC, 8-36 UNF	0.154	0.512	0.256	5000	1000
11112921		8-32 UNC, 8-36 UNF	0.154	0.748	0.256	5000	1000
11113521			0.157	0.512	0.260	5000	1000
11114951			0.157	0.984	0.260	5000	1000
11117541			0.172	0.512	0.274	5000	1000
11118981			0.172	0.748	0.274	5000	1000
11121641			0.177	0.512	0.280	5000	1000
11124321			0.177	0.984	0.280	5000	1000
11124461	M5		0.189	0.512	0.291	5000	1000
11125741	M5		0.189	0.748	0.291	5000	1000
11125771			0.197	0.512	0.299	5000	1000
11126801			0.197	0.748	0.299	5000	1000
11132921			0.205	0.512	0.307	5000	1000
11135671			0.205	0.748	0.307	5000	1000

VC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only.	Carton quantity	Mini pack quantity
11136511			5.30	13.00	7.90	5000	1000
11137131			5.30	25.00	7.90	5000	1000
11137331	M6		5.50	13.00	8.10	5000	1000
11138271	M6		5.50	19.00	8.10	5000	1000
11139611			5.80	13.00	8.40	5000	1000
11144561			5.80	19.00	8.40	5000	1000
11148401		1/4-20 UNC, 1/4-28 UNF	5.90	13.00	8.50	5000	1000
11148631		1/4-20 UNC, 1/4-28 UNF	5.90	25.00	8.50	5000	1000
11150761			6.00	13.00	8.60	5000	1000
11150991			6.00	25.00	8.60	5000	1000
11152401			6.30	13.00	8.90	5000	1000
11153781			6.30	19.00	8.90	5000	1000
11154351			7.00	13.00	9.60	5000	1000
11156791			7.00	19.00	9.60	5000	1000
11158031	M8		7.50	13.00	10.10	5000	1000
11163201	M8		7.50	19.00	10.10	5000	1000
11163651			7.90	13.00	10.50	5000	1000
11164481			7.90	19.00	10.50	5000	1000
11164591			8.00	13.00	10.60	5000	1000
11167741			8.00	25.00	10.60	5000	1000
11178121			8.30	13.00	10.90	5000	1000
11182951			8.30	19.00	10.90	5000	1000
11185511		3/8-16 UNC, 3/8-24 UNF	8.70	13.00	11.30	5000	1000
11188531		3/8-16 UNC, 3/8-24 UNF	8.70	19.00	11.30	5000	1000
11189411			9.00	13.00	11.60	5000	1000
11189551			9.00	19.00	11.60	5000	1000
11191121			9.30	13.00	11.90	5000	1000
11192661			9.30	19.00	11.90	5000	1000
11201661	M10		9.50	13.00	12.10	5000	1000
11205691	M10		9.50	19.00	12.10	5000	1000
11205851			9.70	13.00	12.30	5000	1000
11205861			9.70	25.00	12.30	5000	1000
11206341			10.00	13.00	12.60	5000	1000
11206481			10.00	19.00	12.60	5000	1000
11206741			10.70	13.00	13.30	5000	1000
11213391			10.70	25.00	13.30	5000	1000
11214521			11.00	13.00	13.60	5000	1000



9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

VC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only.	Carton quantity	Mini pack quantity
11136511			0.209	0.512	0.311	5000	1000
11137131			0.209	0.984	0.311	5000	1000
11137331	M6		0.217	0.512	0.319	5000	1000
11138271	M6		0.217	0.748	0.319	5000	1000
11139611			0.228	0.512	0.331	5000	1000
11144561			0.228	0.748	0.331	5000	1000
11148401		1/4-20 UNC, 1/4-28 UNF	0.232	0.512	0.335	5000	1000
11148631		1/4-20 UNC, 1/4-28 UNF	0.232	0.984	0.335	5000	1000
11150761			0.236	0.512	0.339	5000	1000
11150991			0.236	0.984	0.339	5000	1000
11152401			0.248	0.512	0.350	5000	1000
11153781			0.248	0.748	0.350	5000	1000
11154351			0.276	0.512	0.378	5000	1000
11156791			0.276	0.748	0.378	5000	1000
11158031	M8		0.295	0.512	0.398	5000	1000
11163201	M8		0.295	0.748	0.398	5000	1000
11163651			0.311	0.512	0.413	5000	1000
11164481			0.311	0.748	0.413	5000	1000
11164591			0.315	0.512	0.417	5000	1000
11167741			0.315	0.984	0.417	5000	1000
11178121			0.327	0.512	0.429	5000	1000
11182951			0.327	0.748	0.429	5000	1000
11185511		3/8-16 UNC, 3/8-24 UNF	0.343	0.512	0.445	5000	1000
11188531		3/8-16 UNC, 3/8-24 UNF	0.343	0.748	0.445	5000	1000
11189411			0.354	0.512	0.457	5000	1000
11189551			0.354	0.748	0.457	5000	1000
11191121			0.366	0.512	0.469	5000	1000
11192661			0.366	0.748	0.469	5000	1000
11201661	M10		0.374	0.512	0.476	5000	1000
11205691	M10		0.374	0.748	0.476	5000	1000
11205851			0.382	0.512	0.484	5000	1000
11205861			0.382	0.984	0.484	5000	1000
11206341			0.394	0.512	0.496	5000	1000
11206481			0.394	0.748	0.496	5000	1000
11206741			0.421	0.512	0.524	5000	1000
11213391			0.421	0.984	0.524	5000	1000
11214521			0.433	0.512	0.535	5000	1000



9001
ISO certification

caplugs

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

VC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only.	Carton quantity	Mini pack quantity
11217411			11.00	25.00	13.60	5000	1000
11220481	M12		11.10	13.00	13.70	5000	1000
11223341	M12		11.10	19.00	13.70	5000	1000
11228001		1/2-13 UNC, 1/2-20 UNF	11.60	13.00	14.20	5000	1000
11232461		1/2-13 UNC, 1/2-20 UNF	11.60	19.00	14.20	5000	1000
11232881			11.90	13.00	14.50	5000	1000
11235141			11.90	25.00	14.50	5000	1000
11236791			12.00	13.00	14.60	5000	1000
11238311			12.00	19.00	14.60	5000	1000
11240011			12.30	13.00	15.30	5000	1000
11244501			12.30	25.00	15.30	5000	1000
11247651			12.50	13.00	15.50	5000	1000
11249191			12.50	19.00	15.50	5000	1000
11250911			13.10	13.00	16.10	2500	500
11252301			13.10	19.00	16.10	2500	500
11252701	M14		13.50	13.00	16.50	2500	500
11252991	M14		13.50	19.00	16.50	2500	500
11253261			13.80	13.00	16.80	2500	500
11253881			13.80	19.00	16.80	2500	500
11254011			14.00	13.00	17.00	2500	500
11260081			14.00	25.00	17.00	2500	500
11260511	M15		14.30	13.00	17.30	2500	500
11262251	M15		14.30	19.00	17.30	2500	500
11265131			15.00	13.00	18.00	2500	500
11265941			15.00	19.00	18.00	2500	500
11275001			15.50	13.00	18.50	2500	500
11275661			15.50	25.00	18.50	2500	500
11279621			15.80	13.00	18.80	2500	500
11280561			15.80	25.00	18.80	2500	500
11280631			16.00	13.00	19.00	2500	500
11281001			16.00	25.00	19.00	2500	500
11283801			17.00	13.00	20.00	2500	500
11289521			17.00	25.00	20.00	2500	500
11290071	M18		17.40	13.00	20.40	2500	500
11291931	M18		17.40	25.00	20.40	2500	500
11292011	M18		17.40	38.00	20.40	2500	500
11292151			18.00	13.00	21.00	2500	500



9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

VC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only.	Carton quantity	Mini pack quantity
11217411			0.433	0.984	0.535	5000	1000
11220481	M12		0.437	0.512	0.539	5000	1000
11223341	M12		0.437	0.748	0.539	5000	1000
11228001		1/2-13 UNC, 1/2-20 UNF	0.457	0.512	0.559	5000	1000
11232461		1/2-13 UNC, 1/2-20 UNF	0.457	0.748	0.559	5000	1000
11232881			0.469	0.512	0.571	5000	1000
11235141			0.469	0.984	0.571	5000	1000
11236791			0.472	0.512	0.575	5000	1000
11238311			0.472	0.748	0.575	5000	1000
11240011			0.484	0.512	0.602	5000	1000
11244501			0.484	0.984	0.602	5000	1000
11247651			0.492	0.512	0.610	5000	1000
11249191			0.492	0.748	0.610	5000	1000
11250911			0.516	0.512	0.634	2500	500
11252301			0.516	0.748	0.634	2500	500
11252701	M14		0.531	0.512	0.650	2500	500
11252991	M14		0.531	0.748	0.650	2500	500
11253261			0.543	0.512	0.661	2500	500
11253881			0.543	0.748	0.661	2500	500
11254011			0.551	0.512	0.669	2500	500
11260081			0.551	0.984	0.669	2500	500
11260511	M15		0.563	0.512	0.681	2500	500
11262251	M15		0.563	0.748	0.681	2500	500
11265131			0.591	0.512	0.709	2500	500
11265941			0.591	0.748	0.709	2500	500
11275001			0.610	0.512	0.728	2500	500
11275661			0.610	0.984	0.728	2500	500
11279621			0.622	0.512	0.740	2500	500
11280561			0.622	0.984	0.740	2500	500
11280631			0.630	0.512	0.748	2500	500
11281001			0.630	0.984	0.748	2500	500
11283801			0.669	0.512	0.787	2500	500
11289521			0.669	0.984	0.787	2500	500
11290071	M18		0.685	0.512	0.803	2500	500
11291931	M18		0.685	0.984	0.803	2500	500
11292011	M18		0.685	1.496	0.803	2500	500
11292151			0.709	0.512	0.827	2500	500



9001
ISO certification

caplugs

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

VC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only.	Carton quantity	Mini pack quantity
11297461			18.00	25.00	21.00	2500	500
11297661			18.29	13.00	21.29	2500	500
11298881			18.29	25.00	21.29	2500	500
11301651			18.60	13.00	21.60	2500	500
11303191			18.60	25.00	21.60	2500	500
11305831	M20		19.00	13.00	22.00	2500	500
11308801	M20		19.00	25.00	22.00	2500	500
11311921	M20		19.00	38.00	22.00	2500	500
11315301			20.00	13.00	23.00	2500	500
11316031			20.00	25.00	23.00	2500	500
11316211			20.00	38.00	23.00	2500	500
11317281			20.60	13.00	23.60	2500	500
11318561			20.60	25.00	23.60	2500	500
11321401			20.60	38.00	23.60	2500	500
11323191			21.00	13.00	24.00	2500	500
11330571			21.00	25.00	24.00	2500	500
11331301	M22		21.40	13.00	24.40	2500	500
11331771	M22		21.40	25.00	24.40	2500	500
11331921	M22		21.40	38.00	24.40	2500	500
11332621			21.70	13.00	24.70	2500	500
11333561			21.70	25.00	24.70	2500	500
11334481			22.00	13.00	25.40	2500	500
11334911			22.00	25.00	25.40	2500	500
11341211			22.00	38.00	25.40	2500	500
11344891			23.00	13.00	26.40	2500	500
11345521			23.00	25.00	26.40	2500	500
11345971			23.00	38.00	26.40	2500	500
11347341			23.50	13.00	26.90	2500	500
11347441			23.50	25.00	26.90	2500	500
11348011	M24		23.80	13.00	27.20	2500	500
11350791	M24		23.80	25.00	27.20	2500	500
11353501	M24		23.80	38.00	27.20	2500	500
11357481			24.00	13.00	27.40	2500	500
11357831			24.00	25.00	27.40	2500	500
11359031			24.00	38.00	27.40	2500	500
11359411			25.00	13.00	28.40	2500	500
11359431			25.00	25.00	28.40	2500	500



9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

VC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only.	Carton quantity	Mini pack quantity
11297461			0.709	0.984	0.827	2500	500
11297661			0.720	0.512	0.838	2500	500
11298881			0.720	0.984	0.838	2500	500
11301651			0.732	0.512	0.850	2500	500
11303191			0.732	0.984	0.850	2500	500
11305831	M20		0.748	0.512	0.866	2500	500
11308801	M20		0.748	0.984	0.866	2500	500
11311921	M20		0.748	1.496	0.866	2500	500
11315301			0.787	0.512	0.906	2500	500
11316031			0.787	0.984	0.906	2500	500
11316211			0.787	1.496	0.906	2500	500
11317281			0.811	0.512	0.929	2500	500
11318561			0.811	0.984	0.929	2500	500
11321401			0.811	1.496	0.929	2500	500
11323191			0.827	0.512	0.945	2500	500
11330571			0.827	0.984	0.945	2500	500
11331301	M22		0.843	0.512	0.961	2500	500
11331771	M22		0.843	0.984	0.961	2500	500
11331921	M22		0.843	1.496	0.961	2500	500
11332621			0.854	0.512	0.972	2500	500
11333561			0.854	0.984	0.972	2500	500
11334481			0.866	0.512	1.000	2500	500
11334911			0.866	0.984	1.000	2500	500
11341211			0.866	1.496	1.000	2500	500
11344891			0.906	0.512	1.039	2500	500
11345521			0.906	0.984	1.039	2500	500
11345971			0.906	1.496	1.039	2500	500
11347341			0.925	0.512	1.059	2500	500
11347441			0.925	0.984	1.059	2500	500
11348011	M24		0.937	0.512	1.071	2500	500
11350791	M24		0.937	0.984	1.071	2500	500
11353501	M24		0.937	1.496	1.071	2500	500
11357481			0.945	0.512	1.079	2500	500
11357831			0.945	0.984	1.079	2500	500
11359031			0.945	1.496	1.079	2500	500
11359411			0.984	0.512	1.118	2500	500
11359431			0.984	0.984	1.118	2500	500

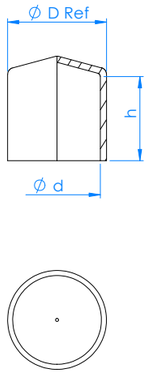

9001
ISO certification

caplugs

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

VC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only.	Carton quantity	Mini pack quantity
11361541			25.00	38.00	28.40	2500	500
11363111			25.40	13.00	28.80	2500	500
11365791			25.40	25.00	28.80	2500	500
11366381			25.40	38.00	28.80	2500	500
11367111			26.40	13.00	29.80	2500	500
11367951			26.40	25.00	29.80	2500	500
11374631			26.40	38.00	29.80	2500	500
11377591			27.00	13.00	30.40	2500	500
11377731			27.00	25.00	30.40	2500	500
11385411			27.00	38.00	30.40	2000	400
11385651			28.00	25.00	31.40	2000	400
11389761			28.00	38.00	31.40	2000	400
11390631			28.50	25.00	31.90	2000	400
11392651			28.50	38.00	31.90	2000	400
11394761			28.60	13.00	32.00	2000	400
11397461			28.60	25.00	32.00	2000	400
11400081			28.60	38.00	32.00	2000	400
11400291			29.00	25.00	32.40	2000	400
11400631			29.00	38.00	32.40	2000	400
11402271			30.00	25.00	33.40	1000	200
11406221			30.00	38.00	33.40	1000	200
11409741			31.00	25.00	34.40	1000	200
11414401			31.00	38.00	34.40	1000	200
11416771			31.80	25.00	35.20	1000	200
11419371			31.80	38.00	35.20	1000	200
11426911			32.00	25.00	35.40	1000	200
11427781			32.00	38.00	35.40	1000	200
11430271			33.00	25.00	36.40	1000	200
11431581			33.00	38.00	36.40	1000	200
11439411			33.33	25.00	36.73	1000	200
11441401			33.33	38.00	36.73	1000	200
11441551			33.50	25.00	36.90	1000	200
11449071			33.50	38.00	36.90	1000	200
11451771			35.00	25.00	38.40	1000	200
11452521			35.00	38.00	38.40	1000	200
11459091			36.00	25.00	39.40	500	100
11461491			36.00	38.00	39.40	500	100



9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

VC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only.	Carton quantity	Mini pack quantity
11361541			0.984	1.496	1.118	2500	500
11363111			1.000	0.512	1.134	2500	500
11365791			1.000	0.984	1.134	2500	500
11366381			1.000	1.496	1.134	2500	500
11367111			1.039	0.512	1.173	2500	500
11367951			1.039	0.984	1.173	2500	500
11374631			1.039	1.496	1.173	2500	500
11377591			1.063	0.512	1.197	2500	500
11377731			1.063	0.984	1.197	2500	500
11385411			1.063	1.496	1.197	2000	400
11385651			1.102	0.984	1.236	2000	400
11389761			1.102	1.496	1.236	2000	400
11390631			1.122	0.984	1.256	2000	400
11392651			1.122	1.496	1.256	2000	400
11394761			1.126	0.512	1.260	2000	400
11397461			1.126	0.984	1.260	2000	400
11400081			1.126	1.496	1.260	2000	400
11400291			1.142	0.984	1.276	2000	400
11400631			1.142	1.496	1.276	2000	400
11402271			1.181	0.984	1.315	1000	200
11406221			1.181	1.496	1.315	1000	200
11409741			1.220	0.984	1.354	1000	200
11414401			1.220	1.496	1.354	1000	200
11416771			1.252	0.984	1.386	1000	200
11419371			1.252	1.496	1.386	1000	200
11426911			1.260	0.984	1.394	1000	200
11427781			1.260	1.496	1.394	1000	200
11430271			1.299	0.984	1.433	1000	200
11431581			1.299	1.496	1.433	1000	200
11439411			1.312	0.984	1.446	1000	200
11441401			1.312	1.496	1.446	1000	200
11441551			1.319	0.984	1.453	1000	200
11449071			1.319	1.496	1.453	1000	200
11451771			1.378	0.984	1.512	1000	200
11452521			1.378	1.496	1.512	1000	200
11459091			1.417	0.984	1.551	500	100
11461491			1.417	1.496	1.551	500	100

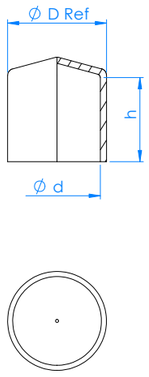

9001
ISO certification

caplugs

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

VC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only.	Carton quantity	Mini pack quantity
11461781			36.50	25.00	39.90	500	100
11465521			36.50	38.00	39.90	500	100
11472391			37.00	25.00	40.40	500	100
11473481			37.00	38.00	40.40	500	100
11476251			37.40	25.00	40.80	500	100
11477091			37.40	38.00	40.80	500	100
11481721			38.00	25.00	41.40	500	100
11483301			38.00	38.00	41.40	500	100
11484351			38.10	25.00	41.50	500	100
11486951			38.10	38.00	41.50	500	100
11487191			39.00	25.00	42.40	500	100
11487641			39.00	38.00	42.40	500	100
11489031			39.50	25.00	42.90	500	100
11490451			39.50	38.00	42.90	500	100
11491131			40.00	25.00	43.40	500	100
11494391			40.00	38.00	43.40	500	100
11500171			41.30	25.00	44.70	500	100
11500221			41.30	38.00	44.70	500	100
11505821			41.50	25.00	44.90	500	100
11507081			41.50	38.00	44.90	500	100
11508821			42.40	25.00	45.80	500	100
11510541			42.40	38.00	45.80	500	100
11513091			43.00	25.00	46.40	500	100
11515341			43.00	38.00	46.40	500	100
11515431			44.00	25.00	47.40	500	100
11518941			44.00	38.00	47.40	500	100
11520281			44.40	25.00	47.80	500	100
11528961			44.40	38.00	47.80	500	100
11536551			47.00	25.00	50.40	500	100
11536641			47.00	38.00	50.40	500	100
11540721			47.64	25.00	51.04	500	100
11541671			47.64	38.00	51.04	500	100
11542431			48.00	25.00	51.40	250	50
11542571			48.00	38.00	51.40	250	50
11545641			50.00	25.00	53.40	250	50
11545781			50.00	38.00	53.40	250	50
11546331			50.80	25.00	54.20	250	50



9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

VC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only.	Carton quantity	Mini pack quantity
11461781			1.437	0.984	1.571	500	100
11465521			1.437	1.496	1.571	500	100
11472391			1.457	0.984	1.591	500	100
11473481			1.457	1.496	1.591	500	100
11476251			1.472	0.984	1.606	500	100
11477091			1.472	1.496	1.606	500	100
11481721			1.496	0.984	1.630	500	100
11483301			1.496	1.496	1.630	500	100
11484351			1.500	0.984	1.634	500	100
11486951			1.500	1.496	1.634	500	100
11487191			1.535	0.984	1.669	500	100
11487641			1.535	1.496	1.669	500	100
11489031			1.555	0.984	1.689	500	100
11490451			1.555	1.496	1.689	500	100
11491131			1.575	0.984	1.709	500	100
11494391			1.575	1.496	1.709	500	100
11500171			1.626	0.984	1.760	500	100
11500221			1.626	1.496	1.760	500	100
11505821			1.634	0.984	1.768	500	100
11507081			1.634	1.496	1.768	500	100
11508821			1.669	0.984	1.803	500	100
11510541			1.669	1.496	1.803	500	100
11513091			1.693	0.984	1.827	500	100
11515341			1.693	1.496	1.827	500	100
11515431			1.732	0.984	1.866	500	100
11518941			1.732	1.496	1.866	500	100
11520281			1.748	0.984	1.882	500	100
11528961			1.748	1.496	1.882	500	100
11536551			1.850	0.984	1.984	500	100
11536641			1.850	1.496	1.984	500	100
11540721			1.876	0.984	2.009	500	100
11541671			1.876	1.496	2.009	500	100
11542431			1.890	0.984	2.024	250	50
11542571			1.890	1.496	2.024	250	50
11545641			1.969	0.984	2.102	250	50
11545781			1.969	1.496	2.102	250	50
11546331			2.000	0.984	2.134	250	50



9001
ISO certification

caplugs

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

VC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only.	Carton quantity	Mini pack quantity
11553521			50.80	38.00	54.20	250	50
11553621			53.00	25.00	56.40	250	50
11554561			53.00	38.00	56.40	250	50
11554741			54.00	25.00	57.40	250	50
11555321			54.00	38.00	57.40	250	50
11557951			55.00	25.00	58.40	250	50
11559881			55.00	38.00	58.40	250	50
11560341			56.00	25.00	59.40	250	50
11561091			56.00	38.00	59.40	250	50
11566351			57.00	25.00	60.40	250	50
11568771			57.00	38.00	60.40	250	50
11569901			59.00	25.00	62.40	250	50
11573931			59.00	38.00	62.40	250	50
11576291			60.00	25.00	63.40	250	50
11579691			60.00	38.00	63.40	250	50
11581381			63.00	25.00	66.40	250	50
11582351			63.00	38.00	66.40	250	50
11582391			63.50	25.00	66.90	250	50
11582411			63.50	38.00	66.90	250	50
11584601			65.00	25.00	68.40	250	50
11586801			65.00	38.00	68.40	250	50
11588791			66.60	25.00	70.00	250	50
11589431			66.60	38.00	70.00	250	50
11593281			68.00	25.00	71.40	250	50
11594921			68.00	38.00	71.40	250	50
11598181			69.80	25.00	73.20	250	50
11599331			69.80	38.00	73.20	250	50
11602001			70.00	25.00	73.40	250	50
11603471			70.00	38.00	73.40	250	50
11605111			72.00	25.00	75.40	250	50
11605151			72.00	38.00	75.40	250	50
11607721			73.00	25.00	76.40	250	50
11613741			73.00	38.00	76.40	250	50
11614471			74.50	25.00	77.90	250	50
11616521			74.50	38.00	77.90	250	50
11618791			76.00	25.00	79.40	250	50
11621611			76.00	38.00	79.40	250	50



9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

VC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only.	Carton quantity	Mini pack quantity
11553521			2.000	1.496	2.134	250	50
11553621			2.087	0.984	2.220	250	50
11554561			2.087	1.496	2.220	250	50
11554741			2.126	0.984	2.260	250	50
11555321			2.126	1.496	2.260	250	50
11557951			2.165	0.984	2.299	250	50
11559881			2.165	1.496	2.299	250	50
11560341			2.205	0.984	2.339	250	50
11561091			2.205	1.496	2.339	250	50
11566351			2.244	0.984	2.378	250	50
11568771			2.244	1.496	2.378	250	50
11569901			2.323	0.984	2.457	250	50
11573931			2.323	1.496	2.457	250	50
11576291			2.362	0.984	2.496	250	50
11579691			2.362	1.496	2.496	250	50
11581381			2.480	0.984	2.614	250	50
11582351			2.480	1.496	2.614	250	50
11582391			2.500	0.984	2.634	250	50
11582411			2.500	1.496	2.634	250	50
11584601			2.559	0.984	2.693	250	50
11586801			2.559	1.496	2.693	250	50
11588791			2.622	0.984	2.756	250	50
11589431			2.622	1.496	2.756	250	50
11593281			2.677	0.984	2.811	250	50
11594921			2.677	1.496	2.811	250	50
11598181			2.748	0.984	2.882	250	50
11599331			2.748	1.496	2.882	250	50
11602001			2.756	0.984	2.890	250	50
11603471			2.756	1.496	2.890	250	50
11605111			2.835	0.984	2.969	250	50
11605151			2.835	1.496	2.969	250	50
11607721			2.874	0.984	3.008	250	50
11613741			2.874	1.496	3.008	250	50
11614471			2.933	0.984	3.067	250	50
11616521			2.933	1.496	3.067	250	50
11618791			2.992	0.984	3.126	250	50
11621611			2.992	1.496	3.126	250	50



9001
ISO certification

caplugs

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

VC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only.	Carton quantity	Mini pack quantity
11621821			80.00	25.00	83.40	150	
11622061			80.00	38.00	83.40	150	
11623371			81.50	25.00	84.90	150	
11626681			81.50	38.00	84.90	150	
11627891			82.00	25.00	85.40	150	
11628771			82.00	38.00	85.40	150	
11629681			82.50	25.00	85.90	150	
11632501			82.50	38.00	85.90	150	
11636231			85.80	25.00	89.20	150	
11645351			85.80	38.00	89.20	150	
11645751			88.90	25.00	92.30	150	
11646441			88.90	38.00	92.30	150	
11648331			89.00	25.00	92.40	150	
11649161			89.00	38.00	92.40	150	
11655401			89.90	25.00	93.30	150	
11657651			89.90	38.00	93.30	150	
11660701			90.00	25.00	93.40	150	
11662731			90.00	38.00	93.40	150	
11662831			100.00	25.00	103.40	50	
11666711			100.00	38.00	103.40	50	
11675131			101.50	25.00	104.90	50	
11675231			101.50	38.00	104.90	50	
11682681			103.00	25.00	106.40	50	
11682701			103.00	38.00	106.40	50	
11683811			105.00	25.00	108.40	50	
11684091			105.00	38.00	108.40	50	
11684351			106.00	25.00	109.40	50	
11685111			106.00	38.00	109.40	50	
11688831			108.00	25.00	111.40	50	
11689921			108.00	38.00	111.40	50	
11691571			112.70	25.00	116.10	50	
11694251			112.70	38.00	116.10	50	
11698121			114.00	25.00	117.40	50	
11702471			114.00	38.00	117.40	50	
11702981			115.00	25.00	118.40	50	
11705311			115.00	38.00	118.40	50	
11706171			120.00	25.00	123.40	50	



9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

VC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only.	Carton quantity	Mini pack quantity
11621821			3.150	0.984	3.283	150	
11622061			3.150	1.496	3.283	150	
11623371			3.209	0.984	3.343	150	
11626681			3.209	1.496	3.343	150	
11627891			3.228	0.984	3.362	150	
11628771			3.228	1.496	3.362	150	
11629681			3.248	0.984	3.382	150	
11632501			3.248	1.496	3.382	150	
11636231			3.378	0.984	3.512	150	
11645351			3.378	1.496	3.512	150	
11645751			3.500	0.984	3.634	150	
11646441			3.500	1.496	3.634	150	
11648331			3.504	0.984	3.638	150	
11649161			3.504	1.496	3.638	150	
11655401			3.539	0.984	3.673	150	
11657651			3.539	1.496	3.673	150	
11660701			3.543	0.984	3.677	150	
11662731			3.543	1.496	3.677	150	
11662831			3.937	0.984	4.071	50	
11666711			3.937	1.496	4.071	50	
11675131			3.996	0.984	4.130	50	
11675231			3.996	1.496	4.130	50	
11682681			4.055	0.984	4.189	50	
11682701			4.055	1.496	4.189	50	
11683811			4.134	0.984	4.268	50	
11684091			4.134	1.496	4.268	50	
11684351			4.173	0.984	4.307	50	
11685111			4.173	1.496	4.307	50	
11688831			4.252	0.984	4.386	50	
11689921			4.252	1.496	4.386	50	
11691571			4.437	0.984	4.571	50	
11694251			4.437	1.496	4.571	50	
11698121			4.488	0.984	4.622	50	
11702471			4.488	1.496	4.622	50	
11702981			4.528	0.984	4.661	50	
11705311			4.528	1.496	4.661	50	
11706171			4.724	0.984	4.858	50	



9001
ISO certification

caplugs

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

VC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only.	Carton quantity	Mini pack quantity
11712761			120.00	38.00	123.40	50	
11717711			125.00	25.00	128.40	50	
11718671			125.00	38.00	128.40	50	
11719061			127.00	25.00	130.40	50	
11743501			127.00	38.00	130.40	50	
11743541			128.50	25.00	131.90	50	
11751461			128.50	38.00	131.90	50	
11754751			130.00	25.00	133.40	50	
11756511			130.00	38.00	133.40	50	
11757441			134.00	25.00	137.40	50	
11759361			134.00	38.00	137.40	50	
11764941			139.00	25.00	142.40	50	
11768951			139.00	38.00	142.40	50	
11769171			139.70	25.00	143.10	50	
11771461			139.70	38.00	143.10	50	
11771651			140.00	25.00	143.40	50	
11773771			140.00	38.00	143.40	50	
11774411			145.00	25.00	148.40	50	
11778291			145.00	38.00	148.40	50	
11778341			150.00	25.00	153.40	50	
11779291			150.00	38.00	153.40	50	
11785151			152.00	25.00	155.40	50	
11789521			152.00	38.00	155.40	50	
11790251			153.00	25.00	156.40	50	
11790771			153.00	38.00	156.40	50	
11791441			158.00	25.00	161.40	50	
11793861			158.00	38.00	161.40	50	
11797211			160.00	25.00	163.40	50	
11800571			160.00	38.00	163.40	50	
11800611			165.00	25.00	168.40	50	
11801621			165.00	38.00	168.40	50	
11805191			165.00	38.00	168.40	50	
11809621			167.00	25.00	170.40	50	
11809651			167.00	38.00	170.40	50	
11811051			171.00	25.00	174.40	50	
11811501			171.00	38.00	174.40	50	
11812341			180.00	25.00	183.40	50	



9001
ISO certification

VC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only.	Carton quantity	Mini pack quantity
11712761			4.724	1.496	4.858	50	
11717711			4.921	0.984	5.055	50	
11718671			4.921	1.496	5.055	50	
11719061			5.000	0.984	5.134	50	
11743501			5.000	1.496	5.134	50	
11743541			5.059	0.984	5.193	50	
11751461			5.059	1.496	5.193	50	
11754751			5.118	0.984	5.252	50	
11756511			5.118	1.496	5.252	50	
11757441			5.276	0.984	5.409	50	
11759361			5.276	1.496	5.409	50	
11764941			5.472	0.984	5.606	50	
11768951			5.472	1.496	5.606	50	
11769171			5.500	0.984	5.634	50	
11771461			5.500	1.496	5.634	50	
11771651			5.512	0.984	5.646	50	
11773771			5.512	1.496	5.646	50	
11774411			5.709	0.984	5.843	50	
11778291			5.709	1.496	5.843	50	
11778341			5.906	0.984	6.039	50	
11779291			5.906	1.496	6.039	50	
11785151			5.984	0.984	6.118	50	
11789521			5.984	1.496	6.118	50	
11790251			6.024	0.984	6.157	50	
11790771			6.024	1.496	6.157	50	
11791441			6.220	0.984	6.354	50	
11793861			6.220	1.496	6.354	50	
11797211			6.299	0.984	6.433	50	
11800571			6.299	1.496	6.433	50	
11800611			6.496	0.984	6.630	50	
11801621			6.496	1.496	6.630	50	
11805191			6.496	1.496	6.630	50	
11809621			6.575	0.984	6.709	50	
11809651			6.575	1.496	6.709	50	
11811051			6.732	0.984	6.866	50	
11811501			6.732	1.496	6.866	50	
11812341			7.087	0.984	7.220	50	



9001
ISO certification

VC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only.	Carton quantity	Mini pack quantity
11817311			180.00	38.00	183.40	50	
11819521			191.00	25.00	194.40	50	
11820291			191.00	38.00	194.40	50	
11821551			203.00	25.00	206.40	40	
11821811			205.00	25.00	208.40	40	
11825261			205.00	38.00	208.40	40	
11829931			216.00	25.00	219.40	40	
11834541			216.00	38.00	219.40	40	
11835441			223.00	25.00	226.40	40	
11836401			223.00	38.00	226.40	40	
11838081			225.00	25.00	228.40	30	
11839731			225.00	38.00	228.40	30	
11842111			244.00	25.00	247.40	30	
11844981			244.00	38.00	247.40	30	
11845021			250.00	25.00	253.40	30	
11845991			250.00	38.00	253.40	30	
11847841			260.00	25.00	263.40	30	
11850231			260.00	38.00	263.40	30	
11850371			270.00	25.00	273.40	25	
11862141			270.00	38.00	273.40	25	
11865851			273.00	25.00	276.40	25	
11866621			273.00	38.00	276.40	25	
11871071			276.00	25.00	279.40	25	
11872581			276.00	38.00	279.40	25	



9001
ISO certification

VC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only.	Carton quantity	Mini pack quantity
11817311			7.087	1.496	7.220	50	
11819521			7.520	0.984	7.654	50	
11820291			7.520	1.496	7.654	50	
11821551			7.992	0.984	8.126	40	
11821811			8.071	0.984	8.205	40	
11825261			8.071	1.496	8.205	40	
11829931			8.504	0.984	8.638	40	
11834541			8.504	1.496	8.638	40	
11835441			8.780	0.984	8.913	40	
11836401			8.780	1.496	8.913	40	
11838081			8.858	0.984	8.992	30	
11839731			8.858	1.496	8.992	30	
11842111			9.606	0.984	9.740	30	
11844981			9.606	1.496	9.740	30	
11845021			9.843	0.984	9.976	30	
11845991			9.843	1.496	9.976	30	
11847841			10.236	0.984	10.370	30	
11850231			10.236	1.496	10.370	30	
11850371			10.630	0.984	10.764	25	
11862141			10.630	1.496	10.764	25	
11865851			10.748	0.984	10.882	25	
11866621			10.748	1.496	10.882	25	
11871071			10.866	0.984	11.000	25	
11872581			10.866	1.496	11.000	25	



9001
ISO certification

VFE Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Extended Grip Pull-Tab Cap

The VFE Series cap incorporates a larger-area pull-tab extending outwards for easier manual removal and quick component access. The cap is easy to apply yet firm enough to remain secure once in place. Internal design is smooth to avoid abrasion damage while durable construction withstands repeated application and removal with no performance loss.



Material: Poly Vinyl Chloride (PVC)
Temperature Resistance: 177°**C** / 350°**F**

***Can be custom printed with your logo**

Black (-**BK**)
RAL 9005

Blue (-**BL**)
RAL 1018

Grey (-**GY**)
RAL 7036

Red (-**RD**)
RAL 3000

Yellow (-**YL**)
RAL 1021

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Dimensions in mm			Dimensions in inches			Packaging	
		d	h	h1	d	h	h1	Carton quantity	Mini pack quantity
		Inside diameter	Inside height	Overall height	Inside diameter	Inside height	Overall height		
11112721	M5	4.80	13.00	26.00	0.189	0.512	1.024	5000	1000
11122551	M8	7.50	13.00	29.00	0.295	0.512	1.142	5000	1000
11139461	M8	7.50	25.00	41.00	0.295	0.984	1.614	5000	1000
11142691		7.70	13.00	29.00	0.303	0.512	1.142	5000	1000
11148101		7.70	25.00	41.00	0.303	0.984	1.614	5000	1000
11186021		8.00	13.00	29.00	0.315	0.512	1.142	5000	1000
11192621		8.00	25.00	41.00	0.315	0.984	1.614	5000	1000
11258491		9.10	13.00	29.00	0.358	0.512	1.142	5000	1000
11294731		9.10	25.00	41.00	0.358	0.984	1.614	5000	1000
11312551	M10	9.50	13.00	29.00	0.374	0.512	1.142	5000	1000
11316881	M10	9.50	25.00	41.00	0.374	0.984	1.614	5000	1000
11323521		9.70	13.00	29.00	0.382	0.512	1.142	5000	1000
11337611		9.70	25.00	41.00	0.382	0.984	1.614	5000	1000
11340261		10.80	13.00	29.00	0.425	0.512	1.142	5000	1000
11362941		10.80	25.00	41.00	0.425	0.984	1.614	5000	1000
11395341	M12	11.10	13.00	29.00	0.437	0.512	1.142	5000	1000
11445571	M12	11.10	25.00	41.00	0.437	0.984	1.614	5000	1000
11481001		12.40	13.00	29.00	0.488	0.512	1.142	5000	1000
11499031		12.40	25.00	41.00	0.488	0.984	1.614	5000	1000
11563311		13.20	13.00	29.00	0.520	0.512	1.142	5000	1000
11607691	M16	15.20	13.00	31.00	0.598	0.512	1.220	2000	400
11645271	M16	15.20	25.00	43.00	0.598	0.984	1.693	2000	400

9001
ISO certification

VFE Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Dimensions in mm			Dimensions in inches			Packaging	
		d	h	h1	d	h	h1	Carton quantity	Mini pack quantity
		Inside diameter	Inside height	Overall height	Inside diameter	Inside height	Overall height		
11678691		15.60	13.00	31.00	0.614	0.512	1.220	2000	400
11690701		15.60	25.00	43.00	0.614	0.984	1.693	2000	400
11709301		15.90	13.00	31.00	0.626	0.512	1.220	2000	400
11711531		15.90	25.00	43.00	0.626	0.984	1.693	2000	400
11751601	M17	16.30	13.00	31.00	0.642	0.512	1.220	2000	400
11767731	M17	16.30	25.00	43.00	0.642	0.984	1.693	2000	400
11787401		17.00	13.00	31.00	0.669	0.512	1.220	2000	400
11792361		21.70	13.00	35.00	0.854	0.512	1.378	2000	400
11795521		21.70	25.00	47.00	0.854	0.984	1.850	2000	400
11808841		28.00	13.00	38.00	1.102	0.512	1.496	2000	400
11817391		28.00	25.00	50.00	1.102	0.984	1.969	2000	400
11819431		28.60	13.00	38.00	1.126	0.512	1.496	2000	400
11833641		28.60	25.00	50.00	1.126	0.984	1.969	2000	400
Part Num-ber	Fits metric thread	d	h	h1	d	h	h1	Carton quantity	Mini pack quantity
		Inside diameter	Inside height	Overall height	Inside diameter	Inside height	Overall height		
		Dimensions in mm			Dimensions in inches			Packaging	



9001
ISO certification

VFC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Flat Pull-Tab Cap

The VFC Series cap includes an integral pull-tab for smooth manual removal with no additional tools. A tight seal ensures precision protection from dust, moisture, contaminants, and corrosion through component lifecycles. Repeated fitting without function loss is enabled by the built-in optimal grip, for easier regular inspection and maintenance.

Material: Poly Vinyl Chloride (PVC)
Temperature Resistance: 177°**C** / 350°**F**

***Can be custom printed with your logo**

Black (**-BK**) RAL 9005

Blue (**-BL**) RAL 5017

Grey (**-GY**) RAL 7036

Red (**-RD**) RAL 3000

Yellow (**-YL**) RAL 1021

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging	
	d	h	h1	d	h	h1	Carton Quantity	Mini Pack Quantity
	Inside diameter	Inside height	Overall height	Inside diameter	Inside height	Overall height		
11166721	5,90	13,00	29,00	0,232	0,512	1,142	5000	1000
11192501	5,90	25,00	41,00	0,232	0,984	1,614	5000	1000
11224551	6,30	13,00	29,00	0,248	0,512	1,142	5000	1000
11320531	6,30	25,00	41,00	0,248	0,984	1,614	5000	1000
11330601	6,80	13,00	29,00	0,268	0,512	1,142	5000	1000
11408151	6,80	25,00	41,00	0,268	0,984	1,614	5000	1000
11438691	7,50	13,00	29,00	0,295	0,512	1,142	5000	1000
11439631	7,50	25,00	41,00	0,295	0,984	1,614	5000	1000
11490781	7,60	13,00	29,00	0,299	0,512	1,142	5000	1000
11545271	7,60	25,00	41,00	0,299	0,984	1,614	5000	1000
11616261	7,90	13,00	29,00	0,311	0,512	1,142	5000	1000
11662431	7,90	25,00	41,00	0,311	0,984	1,614	5000	1000
11682161	9,15	13,00	29,00	0,360	0,512	1,142	2500	500
11694101	9,15	25,00	41,00	0,360	0,984	1,614	2500	500
11735871	13,50	13,00	29,00	0,531	0,512	1,142	1500	300
11783981	14,00	13,00	29,00	0,551	0,512	1,142	1500	300

Part Number	d	h	h1	d	h	h1	Carton Quantity	Mini Pack Quantity
	Inside diameter	Inside height	Overall height	Inside diameter	Inside height	Overall height		
	Dimensions in mm			Dimensions in inches			Packaging	

9001
ISO certification

EZ Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Pull-Tab Cap

The EZ Series pull-tab cap has an innovative design. The pull-tab makes it easier to apply and remove the cap for efficient workflow handling, while built-in flexibility enables conformance to protected items, for a secure and robust seal against contaminants. Durable construction protects from impact, cushioning to prevent components being bumped.

Material: Poly Vinyl Chloride (PVC)
Temperature Resistance: 93°**C** / 200°**F**

***Smaller diameter circular handle**

Black (**-BK**) RAL 9005

Blue (**-BL**) RAL 5017

Grey (**-GY**) RAL 7036

Red (**-RD**) RAL 3000

Yellow (**-YL**) RAL 1021

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging	
	d	h	h1	d	h	h1	Carton quantity	Mini pack quantity
	Inside diameter	Inside height	Overall height	Inside dia-meter	Inside height	Overall height		
11129001	6.00	13.00	29.00	0.236	0.512	1.142	5000	1000
11272851	6.00	25.00	41.00	0.236	0.984	1.614	5000	1000
11288091	7.50	13.00	29.00	0.295	0.512	1.142	5000	1000
11396741	7.50	25.00	41.00	0.295	0.984	1.614	5000	1000
11467591	7.90	13.00	29.00	0.311	0.512	1.142	5000	1000
11500861	7.90	25.00	41.00	0.311	0.984	1.614	5000	1000
11563391	9.00	13.00	29.00	0.354	0.512	1.142	2500	500
11572881	9.00	25.00	41.00	0.354	0.984	1.614	2500	500
11573311	9.40	13.00	29.00	0.370	0.512	1.142	2500	500
11575211	9.40	25.00	41.00	0.370	0.984	1.614	2500	500
11597611	10.30	13.00	29.00	0.406	0.512	1.142	2500	500
11698741	10.30	25.00	41.00	0.406	0.984	1.614	2500	500
11817971	12.40	13.00	29.00	0.488	0.512	1.142	2500	500
11875281	12.40	25.00	41.00	0.488	0.984	1.614	2500	500
11904211	15.20	13.00	29.00	0.598	0.512	1.142	1500	300
11912871	15.40	13.00	29.00	0.606	0.512	1.142	1500	300
11942281	15.40	25.00	41.00	0.606	0.984	1.614	1500	300

Part Number	d	h	h1	d	h	h1	Carton quantity	Mini pack quantity
	Inside diameter	Inside height	Overall height	Inside diameter	Inside height	Overall height		
	Dimensions in mm			Dimensions in inches			Packaging	

9001
ISO certification

VSC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Safety Cap

The VSC Series cap provides a tight yet adaptive seal to stop contaminant entry and maintain the structure and integrity of protected components. Firmness and pliability are balanced, to ensure a robust fit that prevents loosening during handling or vibration. Square profile end design reliably covers sharp edges to reduce risk of operator injury.





Material: Poly Vinyl Chloride (PVC)
Temperature Resistance: 177°**C** / 350°**F**

***This product can be custom printed with your logo**

Black (-**BK**)
RAL 9005

Blue (-**BL**)
RAL 5017

Grey (-**GY**)
RAL 7036

Red (-**RD**)
RAL 3000

Yellow (-**YL**)
RAL 1021

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





9001
ISO certification

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging	
	l	w	h	l	w	h		
	Inside length	Inside width	Inside height	Inside length	Inside width	Inside height	Carton quantity	Mini pack quantity
37115431	6.35	6.35	12.70	0.250	0.250	0.500	5000	1000
37133711	6.35	6.35	25.40	0.250	0.250	1.000	5000	1000
37141241	7.92	7.92	12.70	0.312	0.312	0.500	5000	1000
37154691	7.92	7.92	25.40	0.312	0.312	1.000	5000	1000
37170751	9.53	9.53	12.70	0.375	0.375	0.500	2500	500
37181821	9.53	9.53	25.40	0.375	0.375	1.000	2500	500
11207601	10.00	10.00	13.00	0.394	0.394	0.512	1000	200
37204661	11.10	11.10	12.70	0.437	0.437	0.500	5000	1000
37208541	11.10	11.10	25.40	0.437	0.437	1.000	5000	1000
37217741	12.70	12.70	12.70	0.500	0.500	0.500	3000	600
37233771	12.70	12.70	25.40	0.500	0.500	1.000	2000	400
37281871	15.87	15.87	12.70	0.625	0.625	0.500	2500	500
37341351	15.87	15.87	25.40	0.625	0.625	1.000	1500	300
37354361	19.05	19.05	12.70	0.750	0.750	0.500	2000	400
37363251	19.05	19.05	25.40	0.750	0.750	1.000	1000	200
37366371	22.23	22.23	22.23	0.875	0.875	0.875	1000	200
11277731	24.50	24.50	25.00	0.965	0.965	0.984	1000	200
11280761	25.00	25.00	25.00	0.984	0.984	0.984	1000	200
37383151	25.40	25.40	12.70	1.000	1.000	0.500	1500	300
37394301	25.40	25.40	25.40	1.000	1.000	1.000	900	180
11301591	30.00	30.00	25.00	1.181	1.181	0.984	1000	200
37409931	31.75	31.75	12.70	1.250	1.250	0.500	1000	200

VSC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging	
	l	w	h	l	w	h		
	Inside length	Inside width	Inside height	Inside length	Inside width	Inside height	Carton quantity	Mini pack quantity
37438241	31.75	31.75	25.40	1.250	1.250	1.000	700	140
37446471	34.93	34.93	12.70	1.375	1.375	0.500	1000	200
37461521	34.93	34.93	25.40	1.375	1.375	1.000	750	150
37471041	38.10	38.10	12.70	1.500	1.500	0.500	900	180
37496591	38.10	38.10	25.40	1.500	1.500	1.000	600	120
11557551	40.00	40.00	25.00	1.575	1.575	0.984	750	150
37502021	41.28	41.28	12.70	1.625	1.625	0.500	1000	200
37521241	41.28	41.28	25.40	1.625	1.625	1.000	500	100
37546201	44.45	44.45	12.70	1.750	1.750	0.500	700	140
37585961	44.45	44.45	25.40	1.750	1.750	1.000	500	100
37589941	47.63	47.63	12.70	1.875	1.875	0.500	600	120
37593481	47.63	47.63	25.40	1.875	1.875	1.000	400	80
37619921	50.80	50.80	12.70	2.000	2.000	0.500	600	120
37673331	50.80	50.80	25.40	2.000	2.000	1.000	400	80
11589881	60.00	60.00	38.00	2.362	2.362	1.496	300	60
37692261	63.50	63.50	25.40	2.500	2.500	1.000	300	60
37702761	76.20	76.20	25.40	3.000	3.000	1.000	200	40
11594851	80.00	80.00	38.00	3.150	3.150	1.496	250	40
11662471	85.00	85.00	50.00	3.346	3.346	1.969	100	20
37724671	88.90	88.90	25.40	3.500	3.500	1.000	200	40
11664061	90.00	90.00	50.00	3.543	3.543	1.969	100	20
11769351	100.00	100.00	50.00	3.937	3.937	1.969	100	20
37724881	101.60	101.60	25.40	4.000	4.000	1.000	100	20
37773241	203.20	203.20	38.10	8.000	8.000	1.500	10	

Part Number	l	w	h	l	w	h	Carton quantity	Mini pack quantity
	Inside length	Inside width	Inside height	Inside length	Inside width	Inside height		
	Dimensions in mm			Dimensions in inches			Packaging	





9001
ISO certification

VRF Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Straight Edged Cap

The VRF Series cap is engineered for a secure fit on rectangular components, featuring a flat end to protect against dust, debris, and moisture. Close interfacing ensures a reliable barrier, maintaining component integrity and operational capability. Temperature resistance enhances versatility, and fitting or removal are possible without specialised tools.

Material: Poly Vinyl Chloride (PVC)
Temperature Resistance: 176°**C** / 350°**F**

***This product can be custom printed with your logo**

Black (-**BK**)
RAL 9005


Blue (-**BL**)
RAL 5017


Grey (-**GY**)
RAL 7036

Red (-**RD**)
RAL 3000


Yellow (-**YL**)
RAL 1021

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging	
	l	w	h	l	w	h	Carton quantity	Mini pack quantity
	Inside length	Inside width	Inside height	Inside length	Inside width	Inside height		
37100391	1.01	6.35	12.70	0.040	0.250	0.500	5000	1000
37109881	1.01	25.15	25.40	0.040	0.990	1.000	5000	1000
37128521	1.57	6.35	25.40	0.062	0.250	1.000	5000	1000
37135021	1.57	9.52	25.40	0.062	0.375	1.000	5000	1000
37142831	1.57	12.70	25.40	0.062	0.500	1.000	4000	800
37143441	1.57	16.51	25.40	0.062	0.650	1.000	1000	200
37157871	1.57	22.22	25.40	0.062	0.875	1.000	1000	200
37110251	1.57	28.58	25.40	0.062	1.125	1.000	2500	500
37117171	1.57	29.71	25.40	0.062	1.170	1.000	1500	300
37131221	1.57	76.20	25.40	0.062	3.000	1.000	900	180
37134061	1.57	88.90	25.40	0.062	3.500	1.000	500	100
11103981	1.60	11.00	25.40	0.063	0.433	1.000	5000	1000
11137081	1.60	11.90	25.40	0.063	0.469	1.000	5000	1000
11141951	2.00	24.00	25.40	0.079	0.945	1.000	2500	500
37159251	2.03	9.52	25.40	0.080	0.375	1.000	5000	1000
37174921	2.28	20.32	25.40	0.090	0.800	1.000	2500	500
37172021	2.28	25.40	25.40	0.090	1.000	1.000	2000	400
37179711	2.54	29.08	25.40	0.100	1.145	1.000	2000	400
11145571	3.00	27.00	25.40	0.118	1.063	1.000	2000	400
11157631	3.00	44.00	25.40	0.118	1.732	1.000	2000	400
37263051	3.17	6.35	25.40	0.125	0.250	1.000	5000	1000
37265531	3.17	11.89	25.40	0.125	0.468	1.000	4000	800

9001
ISO certification

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

VRF Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging	
	l	w	h	l	w	h	Carton quantity	Mini pack quantity
	Inside length	Inside width	Inside height	Inside length	Inside width	Inside height		
37269671	3.17	12.70	25.40	0.125	0.500	1.000	4000	800
37271191	3.17	19.05	25.40	0.125	0.750	1.000	2000	400
37286841	3.17	22.22	25.40	0.125	0.875	1.000	2000	400
37221011	3.17	25.40	25.40	0.125	1.000	1.000	2000	400
37241671	3.17	31.75	25.40	0.125	1.250	1.000	1500	300
37246091	3.17	36.58	25.40	0.125	1.440	1.000	1000	200
37252131	3.17	38.10	25.40	0.125	1.500	1.000	1000	200
37262621	3.17	50.80	25.40	0.125	2.000	1.000	1000	200
11160171	4.00	15.00	25.40	0.157	0.591	1.000	3000	600
11190371	4.00	20.00	25.40	0.157	0.787	1.000	2500	500
11203531	4.00	30.00	25.40	0.157	1.181	1.000	1500	300
11206971	4.70	15.40	25.40	0.185	0.606	1.000	3000	600
37329901	4.74	12.70	25.40	0.187	0.500	1.000	3000	600
37335241	4.74	15.87	25.40	0.187	0.625	1.000	3000	600
37337911	4.74	17.44	25.40	0.187	0.687	1.000	2500	500
37315651	4.74	25.40	25.40	0.187	1.000	1.000	1500	300
37320841	4.74	31.75	25.40	0.187	1.250	1.000	1500	300
37326851	4.74	38.10	25.40	0.187	1.500	1.000	1000	200
37329111	4.74	49.19	25.40	0.187	1.937	1.000	1000	200
11208751	4.80	49.20	25.40	0.189	1.937	1.000	1000	200
11212101	5.00	25.00	25.40	0.197	0.984	1.000	1500	300
11231681	5.00	32.00	25.40	0.197	1.260	1.000	1500	300
11244201	5.00	80.00	25.40	0.197	3.150	1.000	750	150
37368861	5.97	20.19	12.70	0.235	0.795	0.500	3000	600
11271861	6.00	20.00	25.40	0.236	0.787	1.000	2000	400
11273371	6.00	30.00	25.40	0.236	1.181	1.000	1000	200
37400641	6.35	12.70	25.40	0.250	0.500	1.000	3000	600
37407091	6.35	14.27	25.40	0.250	0.562	1.000	2500	500
37407711	6.35	15.87	25.40	0.250	0.625	1.000	2500	500
37412091	6.35	19.05	25.40	0.250	0.750	1.000	2000	400
37421781	6.35	22.22	25.40	0.250	0.875	1.000	2000	400
37374471	6.35	25.40	25.40	0.250	1.000	1.000	1500	300
37377361	6.35	28.58	25.40	0.250	1.125	1.000	1500	300
37382731	6.35	31.75	25.40	0.250	1.250	1.000	1000	200
37384631	6.35	33.32	25.40	0.250	1.312	1.000	1000	200
37387601	6.35	38.10	25.40	0.250	1.500	1.000	1000	200
37392221	6.35	44.45	25.40	0.250	1.750	1.000	1000	200





9001
ISO certification

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

VRF Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging	
	l	w	h	l	w	h	Carton quantity	Mini pack quantity
	Inside length	Inside width	Inside height	Inside length	Inside width	Inside height		
37400231	6.35	50.80	25.40	0.250	2.000	1.000	900	180
11287781	6.40	12.70	25.40	0.252	0.500	1.000	3000	600
37436481	7.37	8.74	12.70	0.290	0.344	0.500	5000	1000
37435131	7.37	8.74	25.40	0.290	0.344	1.000	3000	600
37449221	7.92	31.75	25.40	0.312	1.250	1.000	1000	200
37463491	7.92	38.10	25.40	0.312	1.500	1.000	1000	200
11290711	8.00	12.00	25.40	0.315	0.472	1.000	2000	400
11291371	8.00	20.00	25.40	0.315	0.787	1.000	2000	400
11299471	8.00	25.00	25.40	0.315	0.984	1.000	2000	400
11301751	8.00	27.00	25.40	0.315	1.063	1.000	2000	400
11304991	8.00	50.00	25.40	0.315	1.969	1.000	1000	200
11314531	8.20	18.00	25.40	0.323	0.709	1.000	2000	400
11332701	8.30	56.00	25.40	0.327	2.205	1.000	1000	200
37466231	8.89	73.66	25.40	0.350	2.900	1.000	600	120
37483231	9.52	15.87	25.40	0.375	0.625	1.000	2000	400
37470861	9.52	25.40	25.40	0.375	1.000	1.000	1500	300
37471921	9.52	28.12	25.40	0.375	1.107	1.000	1000	200
37477731	9.52	31.75	25.40	0.375	1.250	1.000	1000	200
37478801	9.52	38.11	25.40	0.375	1.500	1.000	1000	200
37485971	9.52	200.03	25.40	0.375	7.875	1.000	250	50
11357651	10.00	15.00	25.40	0.394	0.591	1.000	2500	500
11429311	10.00	50.00	25.40	0.394	1.969	1.000	1000	200
11456361	11.00	108.00	25.40	0.433	4.252	1.000	500	100
11471371	12.00	24.00	25.40	0.472	0.945	1.000	1000	200
37552071	12.70	15.87	25.40	0.500	0.625	1.000	1500	300
37553631	12.70	19.05	25.40	0.500	0.750	1.000	1500	300
37515161	12.70	31.75	25.40	0.500	1.250	1.000	1000	200
37517071	12.70	38.10	25.40	0.500	1.500	1.000	1000	200
37519011	12.70	50.80	25.40	0.500	2.000	1.000	800	160
37520991	12.70	85.72	25.40	0.500	3.375	1.000	500	100
11513711	13.00	45.00	25.40	0.512	1.772	1.000	1000	200
11543661	15.00	30.00	25.40	0.591	1.181	1.000	1000	200
11545061	15.00	40.00	25.40	0.591	1.575	1.000	1000	200
37555271	15.87	44.45	25.40	0.625	1.750	1.000	800	160
37568571	15.87	50.80	25.40	0.625	2.000	1.000	1000	200
37576221	15.87	165.10	25.40	0.625	6.500	1.000	300	60
37580191	19.05	25.40	25.40	0.750	1.000	1.000	1000	200
37584481	19.05	28.57	25.40	0.750	1.125	1.000	1000	200





9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

VRF Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging	
	l	w	h	l	w	h	Carton quantity	Mini pack quantity
	Inside length	Inside width	Inside height	Inside length	Inside width	Inside height		
37589011	19.05	38.10	25.40	0.750	1.500	1.000	1500	300
37591691	19.05	63.50	25.40	0.750	2.500	1.000	500	100
37593731	19.05	79.38	31.80	0.750	3.125	1.250	500	100
37623491	19.05	101.60	31.80	0.750	4.000	1.250	250	50
11551781	20.00	40.00	25.40	0.787	1.575	1.000	1000	200
37632981	20.19	48.26	25.40	0.795	1.900	1.000	1000	200
37646021	24.38	85.09	25.40	0.960	3.350	1.000	250	50
37175121	25.40	38.10	25.40	1.000	1.500	1.000	1000	200
37178311	25.40	50.80	25.40	1.000	2.000	1.000	600	120
37183261	26.97	63.50	25.40	1.062	2.500	1.000	500	100
11575141	28.00	66.00	25.40	1.102	2.598	1.000	750	150
37184571	28.58	57.15	25.40	1.125	2.250	1.000	500	
11602541	29.00	63.00	25.40	1.142	2.480	1.000	750	150
11604641	30.00	50.00	25.40	1.181	1.969	1.000	750	150
11617301	30.20	66.70	25.40	1.189	2.626	1.000	750	150
37288051	34.93	51.31	12.70	1.375	2.020	0.500	1000	200
37288231	38.10	60.96	25.40	1.500	2.400	1.000	250	50
37290291	38.10	63.50	25.40	1.500	2.500	1.000	400	
37293231	38.10	69.85	25.40	1.500	2.750	1.000	400	80
37297531	38.86	57.91	12.70	1.530	2.280	0.500	750	150
11619101	40.00	80.00	25.40	1.575	3.150	1.000	500	100
37299571	44.45	63.50	12.70	1.750	2.500	1.000	750	150
37303221	45.21	70.61	12.70	1.780	2.780	0.500	500	100
37354711	45.21	70.61	12.70	1.780	2.780	0.500	500	100
37338341	49.02	74.17	25.40	1.930	2.920	1.000	300	
37345721	49.28	68.33	12.70	1.940	2.690	0.500	500	100
37355771	50.80	88.90	25.40	2.000	3.500	1.000	250	50
37358371	50.80	101.60	25.40	2.000	4.000	1.000	250	50
37363041	50.80	152.40	38.10	2.000	6.000	1.500	150	30
37365681	59.44	97.54	12.70	2.340	3.840	0.500	250	50
37372841	63.50	76.20	25.40	2.500	3.000	1.000	250	50
37433671	69.85	98.55	12.70	2.750	3.880	0.500	250	50
37439321	76.20	101.60	38.10	3.000	4.000	1.500	150	30
37440271	76.20	114.30	12.70	3.000	4.500	0.500	250	25
11656931	90.00	147.50	25.40	3.543	5.807	1.000	250	25

Part Number	l	w	h	l	w	h	Carton quantity	Mini pack quantity
	Inside length	Inside width	Inside height	Inside length	Inside width	Inside height		
	Dimensions in mm			Dimensions in inches			Packaging	





9001
ISO certification

VRR Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Friction Fit Cap

The VRR Series caps are rectangular caps with rounded ends and a built-in friction fit, designed to protect robustly under mechanical vibration or during transportation. A durable barrier against water, dust, and other particulates guards connection points with precision, preserving systems integrity. Easy manual application and removal enable fast and efficient operation.



Material: Poly Vinyl Chloride (PVC)
Temperature Resistance: 177°**C** / 350°**F**

***Can be custom printed with your logo**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





9001
ISO certification

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging	
	l	w	h	l	w	h		
	Inside length	Inside width	Inside height	Inside length	Inside width	Inside height	Carton quantity	Mini pack quantity
11109641	1.30	9.00	25.40	0.051	0.354	1.000	5000	1000
37134821	1.57	11.09	25.40	0.062	0.437	1.000	5000	1000
37139811	1.57	11.88	25.40	0.062	0.468	1.000	5000	1000
37178231	1.57	12.70	25.40	0.062	0.500	1.000	4000	800
37186611	1.57	15.87	25.40	0.062	0.625	1.000	4000	800
37195611	1.57	19.05	25.40	0.062	0.750	1.000	3000	600
37205891	1.57	22.22	25.40	0.062	0.875	1.000	2500	500
37117111	1.57	25.40	25.40	0.062	1.000	1.000	1500	300
37122891	1.57	30.17	25.40	0.062	1.188	1.000	1500	300
37122931	1.57	7.92	25.40	0.062	0.312	1.000	5000	1000
37123211	1.57	9.52	25.40	0.062	0.375	1.000	5000	1000
11116291	2.00	19.00	25.40	0.079	0.748	1.000	5000	1000
37208251	2.28	22.22	25.40	0.090	0.875	1.000	2000	400
11119811	3.00	15.00	25.40	0.118	0.591	1.000	3000	600
11136631	3.00	17.50	25.40	0.118	0.689	1.000	2500	500
11140571	3.00	25.00	25.40	0.118	0.984	1.000	2500	500
11152741	3.00	28.00	25.40	0.118	1.102	1.000	2500	500
37318881	3.17	12.70	25.40	0.125	0.500	1.000	4000	800
37321631	3.17	15.87	25.40	0.125	0.625	1.000	3000	600
37327361	3.17	19.05	25.40	0.125	0.750	1.000	2000	400
37331651	3.17	22.22	25.40	0.125	0.875	1.000	2000	400
37238161	3.17	25.40	25.40	0.125	1.000	1.000	2000	400

VRR Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging	
	l	w	h	l	w	h		
	Inside length	Inside width	Inside height	Inside length	Inside width	Inside height	Carton quantity	Mini pack quantity
37248611	3.17	31.75	25.40	0.125	1.250	1.000	1500	300
37266031	3.17	9.52	25.40	0.125	0.375	1.000	5000	1000
11153111	4.00	22.00	25.40	0.157	0.866	1.000	1500	300
37340071	4.06	31.75	25.40	0.160	1.250	1.000	1500	300
11154391	4.70	25.10	25.40	0.185	0.988	1.000	1500	300
37475141	4.74	15.87	25.40	0.187	0.625	1.000	3000	600
37361891	4.74	25.40	25.40	0.187	1.000	1.000	1500	300
37383961	4.74	38.10	25.40	0.187	1.500	1.000	1000	200
37393301	4.74	50.80	25.40	0.187	2.000	1.000	1000	200
37410311	4.74	9.52	25.40	0.187	0.375	1.000	4000	800
11189251	4.80	31.50	25.40	0.189	1.240	1.000	1500	300
11226041	5.00	25.00	25.40	0.197	0.984	1.000	1500	300
11226101	5.00	30.00	25.40	0.197	1.181	1.000	1500	300
11251091	5.00	40.00	25.40	0.197	1.575	1.000	1500	300
11295891	5.00	50.00	25.40	0.197	1.969	1.000	1500	300
11312181	6.00	20.00	25.40	0.236	0.787	1.000	2000	400
11316571	6.00	24.00	25.40	0.236	0.945	1.000	2000	400
37541661	6.35	12.70	25.40	0.250	0.500	1.000	3000	600
37549061	6.35	19.12	25.40	0.250	0.750	1.000	2000	400
37507191	6.35	25.40	25.40	0.250	1.000	1.000	1500	300
37529571	6.35	31.75	25.40	0.250	1.250	1.000	1000	200
37535971	6.35	38.10	25.40	0.250	1.500	1.000	1000	200
37538551	6.35	9.52	25.40	0.250	0.375	1.000	4000	800
37600301	7.92	15.87	25.40	0.312	0.625	1.000	2000	400
37585851	7.92	45.23	25.40	0.312	1.781	1.000	1000	200
11333611	8.00	25.00	25.40	0.315	0.984	1.000	1500	300
11345231	8.00	40.00	25.40	0.315	1.575	1.000	1000	200
37640861	9.52	12.70	25.40	0.375	0.500	1.000	2500	500
37657381	9.52	22.22	25.40	0.375	0.875	1.000	1500	300
11351361	10.00	29.00	25.40	0.394	1.142	1.000	1000	200
11353071	12.70	31.50	25.40	0.500	1.240	1.000	1000	200
37667291	12.70	25.40	25.40	0.500	1.000	1.000	1000	200
37671681	12.70	38.10	25.40	0.500	1.500	1.000	1000	200
11363501	20.00	68.00	25.40	0.787	2.677	1.000	1000	200
37235321	29.72	34.04	25.40	1.170	1.340	1.000	1000	200
11382451	30.00	40.00	25.40	1.181	1.575	1.000	1000	200

Part Number	l	w	h	l	w	h	Carton quantity	Mini pack quantity
	Inside length	Inside width	Inside height	Inside length	Inside width	Inside height		
	Dimensions in mm			Dimensions in inches			Packaging	





9001
ISO certification

BFS Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Banjo Fittings-Specific Cap

The BANJO Series cap is of soft and flexible construction, allowing it to conform closely to the shape of banjo fittings and bolts. The result is a snug fit to exclude contaminants including moisture, oils and dirt and maintain the crucial cleanliness of hydraulic systems. Easy to apply and remove, the cap suits frequent maintenance situations.

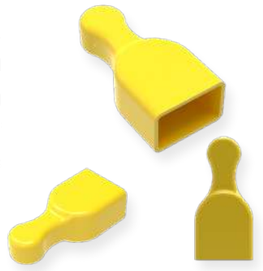

Material: Poly Vinyl Chloride (PVC)
Temperature Resistance: 93°C / 200°F

***The cap can be custom printed with your logo**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

9001
ISO certification

*For more information visit our website: **www.caplugs.eu**

Part Number	To fit DIN 7642 type B and E unions pipe diameter	Dimensions in mm			Dimensions in inches			Packaging
		l	w	h	l	w	h	
		Inside length	Inside width	Inside height from centre to outer edge	Inside length	Inside width	Inside height from centre to outer edge	Carton quantity
11307851	5	14.00	8.00	8.00	0.551	0.315	0.315	1000
11615611	6	17.00	10.00	11.50	0.669	0.394	0.453	1000
11790051	8	20.00	12.00	15.00	0.787	0.472	0.591	1000
11976471	10	24.00	14.00	18.00	0.945	0.551	0.709	1000

Part Number	To fit DIN 7642 type B and E unions pipe diameter	l	w	h	l	w	h	Carton quantity
		Inside length	Inside width	Inside height from centre to outer edge	Inside length	Inside width	Inside height from centre to outer edge	
		Dimensions in mm			Dimensions in inches			Packaging

caplugs

Visit **www.caplugs.eu** for full product information and build your order with precision and confidence.

Custom Vinyl Solutions for Demanding Applications

Vinyl (PVC) offers extraordinary versatility, making it ideal for highly customised industrial components. Whether thick or thin, rigid or flexible, or produced in virtually any colour, vinyl can be tailored to meet your requirements.

Key Material Benefits

Exceptional versatility: PVC can be manufactured in a wide range of thicknesses, hardness levels, and colors.

Adjustable flexibility: Material hardness is determined by the amount of plasticiser used. Measured on the **Shore A scale**, from **40 Shore A (very flexible)** to **95 Shore A (rigid)**.

Custom surface finishes: Standard: **High-gloss** Optional: **Satin**, **matte**, **textured (foam)**, and **fluorescent** materials

Customised Components

Beyond our catalogue products and vinyl coating solutions, we also manufacture:

- Custom dip-moulded parts

- Fully configurable components tailored to functional and aesthetic requirements

PVC Bellows

Our PVC bellows deliver reliable performance in diverse industrial environments and are ideal for protecting mechanical components. Key advantages include:

Excellent flexibility, even in demanding conditions

Resistance to chemicals, moisture, and abrasion

Precision moulding for accurate fit and performance

Wide configurability in size, shape, thickness, and color

Optional reinforcement features for enhanced durability

Whether for sealing, shielding, or movement compensation, our bellows are engineered to keep systems running smoothly.

From Concept to Production

Our team supports you throughout the entire development process.

Contact our product specialists today to schedule an appointment and discuss your custom solution.

Scan for more information about our vinyl solutions

Threaded Caps

When Strong Sealing Closure is Critical

Caplugs threaded caps provide secure closure for threaded pipes, tubes, and rods. Protecting from contamination and physical impacts in demanding environments, each cap ensures a perfect fit that prevents leakage and secures against dust and moisture.

The precision-threaded design enables close and strong engagement with the protected component, keeping the cap firmly in place during transportation, storage, and operational processes. This is particularly important where vibration or other mechanical stresses might dislodge a non-threaded cap.

Produced to consistent high standards, each cap can be applied and removed repeatedly, with no compromise of thread integrity. Their reliability extends the service life of protected components; critical for industries requiring a sterile or consistently controlled environment.

More details about these products on our website

CD Series

Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

JIC Fittings Cap

The CD Series threaded cap is designed to securely seal flared JIC fittings, maintaining critical cleanliness and integrity. The knurled design's textured cap exterior improves grip, while making application or removal quick and easy for greater efficiency during routine operations. Durability in a wide variety of conditions increases versatility.

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°**C** / 150°**F**

***Meets national aerospace standard NAS 832**

Red (-**RD**)
RAL 3024

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	To fit tubing size	To fit thread size	NAS 832 Reference	Number of knurls	Dimensions in mm	Dimensions in inches	Packaging	
					h	h		
					Height	Height	Carton quantity	Mini pack quantity
39119811		1/4-36		4	5.55	0.22	5000	1000
39124921	3/16	3/8-24	NAS 832-3	4	11.94	0.47	5000	1000
39134741	1/4	7/16-20	NAS 832-4	4	11.94	0.47	5000	1000
39139331	1/4	7/16-24		4	7.62	0.30	5000	1000
39141891	5/16	1/2-20	NAS 832-5	6	11.94	0.47	5000	1000
39145841	5/16	1/2-20		6	7.87	0.31	5000	1000
39156501	5/16	1/2-20		6	22.35	0.88	5000	1000
39197531	3/8	9/16-18	NAS 832-6	6	13.46	0.53	5000	1000
39201191	3/8	5/8-18		6	11.94	0.47	7500	1500
39207821	3/8	5/8-18		6	13.46	0.53	5000	1000
39217341	3/8	5/8-18		6	19.05	0.75	5000	1000
39246011		5/8-24	NAS 832-7	6	10.41	0.41	5000	1000
39269271	1/2	3/4-16	NAS 832-8	6	14.48	0.57	5000	1000
39270921	1/2	3/4-16		6	16.00	0.63	4500	900
39297301		3/4-18	NAS 832-9	6	17.53	0.69	5000	1000
39307051		3/4-20		6	12.70	0.50	5000	1000
39319761	5/8	7/8-14	NAS 832-10	6	17.27	0.68	5000	1000
39336191	5/8	7/8-18		6	11.18	0.44	5000	1000
39347401	5/8	7/8-18		6	19.81	0.78	5000	1000
39355141	5/8	7/8-20		6	18.29	0.72	4000	800
39394951		1-14		8	19.81	0.78	2500	500
39400561		1-20		8	20.57	0.81	2000	400



9001
ISO certification

14001
ISO certification

16949
IATF certification

CD Series

Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	To fit tubing size	To fit thread size	NAS 832 Reference	Number of knurls	Dimensions in mm	Dimensions in inches	Packaging	
					h	h		
					Height	Height	Carton quantity	Mini pack quantity
39400741	3/4	1-1/16-12	NAS 832-12	8	19.05	0.75	2500	500
39415241	3/4	1-1/16-14		8	19.05	0.75	1500	300
39419051		1-1/8-18		8	11.94	0.47	2500	500
39419441	7/8	1-3/16-12		6	23.88	0.94	2500	500
39425131	1	1-5/16-12	NAS 832-16	8	21.34	0.84	1000	200
39426371		1-1/4-18		8	11.94	0.47	2000	400
39436271		1-5/16-12		8	22.35	0.88	1000	200
39447281		1-3/8-18		8	11.94	0.47	1500	300
39479011		1-1/2-12		8	19.05	0.75	1000	200
39483051	1-1/4	1-5/8-12	NAS 832-20	8	23.11	0.91	750	150
39486251		1-3/4-12		8	23.88	0.94	1000	200
39501531	1-1/2	1-7/8-12		8	25.40	1.00	700	140
39526311		3-12		12	29.47	1.16	250	50





9001
ISO certification

14001
ISO certification

16949
IATF certification

TCV Series

Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Ribbed Grip Cap

The TCV Series cap precisely fits, robustly seals and reliably preserves unified fine threaded areas of protected components. Debris access prevention maintains delicate thread pattern performance for enhanced connection integrity. The knurled exterior increases torque control, enabling flexible adjustment and application or removal efficiency.

Material: Polyamide 6 (PA)
Temperature Resistance: 149°**C** / 300°**F**

***Also available in a series made from reinforced material**

Yellow (-**YL**)
RAL 1021

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	TH	h	D	TH	h	D	Carton quantity
	Thread size	Height	Outside diameter	Thread size	Height	Outside diameter	
13413101	M8 x 1.25	7.40	12.90	M8 x 1.25	0.291	0.508	500
13105001	M10 x 1	7.50	14.00	M10 x 1	0.295	0.551	500
13106461	M10 x 1.25	12.00	16.00	M10 x 1.25	0.472	0.630	500
13113941	M12 x 1	12.00	16.30	M12 x 1	0.472	0.642	500
13116641	M12 x 1	14.60	16.20	M12 x 1	0.575	0.638	500
13117831	M12 x 1.5	11.20	16.30	M12 x 1.5	0.441	0.642	500
13120061	M14 x 1.5	12.10	18.10	M14 x 1.5	0.476	0.713	500
13121311	M15 x 1.25	12.10	18.78	M15 x 1.25	0.476	0.739	500
13123661	M16 x 1.5	11.40	21.66	M16 x 1.5	0.449	0.853	300
13131231	M18 x 1.5	12.00	22.50	M18 x 1.5	0.472	0.886	300
13142651	M20 x 1.5	14.00	25.40	M20 x 1.5	0.551	1.000	500
13144101	M20 x 2	14.00	25.50	M20 x 2	0.551	1.004	500
13152931	M21 x 1	20.00	28.00	M21 x 1	0.787	1.102	500
13156981	M22 x 1.5	14.30	28.30	M22 x 1.5	0.563	1.114	500
13157021	M24 x 1.5	14.00	33.00	M24 x 1.5	0.551	1.299	300
13157671	M24 x 3	14.00	33.00	M24 x 3	0.551	1.299	300
13163221	M24 x 3.5	14.00	33.00	M24 x 3.5	0.551	1.299	300
13166931	M25 x 1.5	14.00	32.90	M25 x 1.5	0.551	1.295	300
13167111	M26 x 1.5	14.00	33.20	M26 x 1.5	0.551	1.307	300
13169191	M27 x 1.5	14.00	33.00	M27 x 1.5	0.551	1.299	300
13173931	M27 x 2	14.00	33.00	M27 x 2	0.551	1.299	500
13178441	M28 x 1.5	14.25	33.60	M28 x 1.5	0.561	1.323	500

TCV Series

Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88





*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	TH	h	D	TH	h	D	Carton quantity
	Thread size	Height	Outside diameter	Thread size	Height	Outside diameter	
13179661	M28 x 2	14.00	33.20	M28 x 2	0.551	1.307	500
13182071	M30 x 1.5	14.00	39.80	M30 x 1.5	0.551	1.567	300
13186201	M30 x 2	14.00	39.50	M30 x 2	0.551	1.555	300
13186741	M32 x 2	14.35	39.50	M32 x 2	0.565	1.555	300
13200531	M35 x 1.5	15.50	44.00	M35 x 1.5	0.610	1.732	300
13205621	M36 x 1.5	16.50	44.90	M36 x 1.5	0.650	1.768	300
13209801	M36 x 2	16.85	44.90	M36 x 2	0.663	1.768	200
13210921	M38 x 1.5	17.35	45.20	M38 x 1.5	0.683	1.780	200
13215451	M40 x 2.5	17.20	45.20	M40 x 2.5	0.677	1.780	200
13218081	M42 x 2	17.00	50.35	M42 x 2	0.669	1.982	200
13228051	R 1/8"	7.70	14.15	R 1/8"	0.303	0.557	500
13229711	R 1/4"	11.75	18.20	R 1/4"	0.463	0.717	200
13230321	R 3/8"	12.50	21.20	R 3/8"	0.492	0.835	300
13233531	R 1/2"	14.20	26.00	R 1/2"	0.559	1.024	200
13236901	R 5/8"	13.50	28.00	R 5/8"	0.531	1.102	200
13239581	R 3/4"	14.20	33.15	R 3/4"	0.559	1.305	300
13243421	R 1"	14.00	39.20	R 1"	0.551	1.543	300
13248491	R 1-1/4"	17.00	50.20	R 1-1/4"	0.669	1.976	50
13253201	R 1-1/2"	16.20	56.90	R 1-1/2"	0.638	2.240	50
13256601	R 2"	18.00	68.00	R 2"	0.709	2.677	25
13260051	7/16-20 UNF	12.30	15.15	7/16-20 UNF	0.484	0.596	300
13265081	1/2-20 UNF	15.15	18.60	1/2-20 UNF	0.596	0.732	300
13275591	9/16-18 UNF	12.00	18.80	9/16-18 UNF	0.472	0.740	300
13280011	9/16-24 UNF	12.00	18.80	9/16-24 UNF	0.472	0.740	300
13281101	5/8-18 UNF	12.00	21.10	5/8-18 UNF	0.472	0.831	300
13281881	3/4-16 UNF	16.70	24.25	3/4-16 UNF	0.657	0.955	200
13282331	3/4-16 UNF	20.20	24.30	3/4-16 UNF	0.795	0.957	200
13285551	11/16-16 UNF	10.00	22.40	11/16-16 UNF	0.394	0.882	300
13285961	11/16-16 UNF	11.75	23.00	11/16-16 UNF	0.463	0.906	300
13290441	13/16-16 UNF	11.15	25.50	13/16-16 UNF	0.439	1.004	500
13290701	13/16-16 UNF	13.00	26.10	13/16-16 UNF	0.512	1.028	500
13292381	7/8-14 UNF	20.00	28.20	7/8-14 UNF	0.787	1.110	300
13293631	1-14 UNF	12.00	33.00	1-14 UNF	0.472	1.299	300
13294921	1-14 UNF	14.00	33.40	1-14 UNF	0.551	1.315	300
13296381	1-1/16-12 UNF	14.15	33.20	1-1/16-12 UNF	0.557	1.307	300
13299051	1-1/16-12 UNF	23.10	33.70	1-1/16-12 UNF	0.909	1.327	200
13306961	1-3/16-12 UNF	13.50	39.40	1-3/16-12 UNF	0.531	1.551	300

TCV Series

Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	TH	h	D	TH	h	D	Carton quantity
	Thread size	Height	Outside diameter	Thread size	Height	Outside diameter	
13314171	1-1/4-12 UNF	14.50	39.00	1-1/4-12 UNF	0.571	1.535	300
13323511	1-5/16-12 UNF	13.95	39.20	1-5/16-12 UNF	0.549	1.543	300
13323671	1-7/16-12 UNF	16.50	44.10	1-7/16-12 UNF	0.650	1.736	200
13324791	1-5/8-12 UNF	17.00	50.20	1-5/8-12 UNF	0.669	1.976	100
13337451	1-7/8-12 UNF	17.00	50.00	1-7/8-12 UNF	0.669	1.969	100
13341181	1-11/16-12 UNF	17.00	50.55	1-11/16-12 UNF	0.669	1.990	100

Part Number	TH	h	D	TH	h	D	Carton quantity
	Thread size	Height	Outside diameter	Thread size	Height	Outside diameter	
	Dimensions in mm			Dimensions in inches			Packaging



ASC Series

Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Flared Fittings Cap

The ASC Series cap incorporates a nose section that forms a low-pressure seal for secure application to threaded flared fittings. Construction combines exceptional strength with corrosion and contaminants resistance to provide advanced protection capability. Combining with an additional sealing disc ensures even greater reliability and versatility.

Material: Aluminium (Al)
Temperature Resistance: Not applicable.

***Can also be supplied with a rubber seal**



Aluminum (-**AL**)
RAL 9007

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For product quantities visit our website: **www.caplugs.eu**

Part Number	To fit tube size	To fit thread size	NAS 835 Reference	Dimensions in mm		Dimensions in inches		Packaging	
				H	H1	H	H1	Carton quantity	Mini pack quantity
				Overall height	Step height	Overall height	Step height		
39914371	1/8	5/16-24	NAS 835-2	10.67	8.38	0.42	0.33	5000	1000
39320661	3/16	3/8-24	NAS 835-3	10.92	7.62	0.43	0.30	5000	1000
39831371	1/4	7/16-20	NAS 835-4	13.72	11.68	0.54	0.46	5000	1000
39673071	5/16	1/2-20	NAS 835-5	13.21	10.92	0.52	0.43	5000	1000
39942491	3/8	9/16-18	NAS 835-6	13.72	11.68	0.54	0.46	6000	1000
39862441	7/16	5/8-18	NAS 835-7	15.49	13.21	0.61	0.52	5000	1000
39428461	1/2	3/4-16	NAS 835-8	16.26	13.97	0.64	0.55	6000	1000
39127541	5/8	7/8-14	NAS 835-10	18.80	16.51	0.74	0.65	3700	500
39491051	3/4	1-1/16-12	NAS 835-12	21.59	19.30	0.85	0.76	2200	500
39106981	1	1-5/16-12	NAS 835-16	21.84	19.81	0.86	0.78	1400	200
39737291	1-1/4	1-5/8-12	NAS 835-20	22.10	18.03	0.87	0.71	950	190

Part Number	To fit tube size	To fit thread size	NAS 835 Reference	H	H1	H	H1	Carton quantity	Mini pack quantity
				Overall height	Step height	Overall height	Step height		
				Dimensions in mm		Dimensions in inches		Packaging	

9001
ISO certification

TCW Series

Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Ribbed Grip Cap with Gasket

The TCW Series threaded cap is designed with a textured surface to increase tactile grip, enabling ease of application and removal even if wearing gloves. Robust construction protects from contaminants or particulates, maintaining threaded connection reliability. Resistance to rigorous usage enhances operational lifespan in demanding conditions.

Material: Polyamide 6 (PA)
Gasket: Thermoplastic Elastomer (TPE)
Temperature Resistance: 149**°C** / 300**°F**

***This series includes a gasket**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm				Packaging
	TH	h	h1	D	Carton quantity
	Thread size	Height	Gasket thickness	Outside diameter	
13349761	M8 x 1.25	7.40	2.00	12.90	500
13352441	M10 x 1	7.50	2.00	14.00	500
13353931	M10 x 1.25	12.00	2.00	16.00	500
13357781	M12 x 1	12.00	2.00	16.30	500
13370771	M12 x 1	14.60	2.00	16.20	500
13379111	M12 x 1.5	11.20	2.00	16.30	500
13386771	M14 x 1.5	12.10	2.00	18.10	500
13387111	M15 x 1.25	12.10	2.00	18.78	500
13393321	M16 x 1.5	11.40	2.00	21.66	300
13394261	M18 x 1.5	12.00	2.00	22.50	300
13395931	M20 x 1.5	14.00	2.00	25.40	500
13397011	M20 x 2	14.00	2.00	25.50	500
13397231	M21 x 1	20.00	2.00	28.00	500
13404911	M22 x 1.5	14.30	2.00	28.30	500
13408471	M24 x 1.5	14.00	2.00	33.00	300
13409481	M24 x 3	14.00	2.00	33.00	300
13410761	M24 x 3.5	14.00	2.00	33.00	300
13411911	M25 x 1.5	14.00	2.00	32.90	300
13419031	M26 x 1.5	14.00	2.00	33.20	300
13419111	M27 x 1.5	14.00	2.00	33.00	300
13420891	M27 x 2	14.00	2.00	33.00	500
13430491	M28 x 1.5	14.25	2.00	33.60	500

TCW Series

Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches				Packaging
	TH	h	h1	D	Carton quantity
	Thread size	Height	Gasket thickness	Outside diameter	
13349761	M8 x 1.25	0.291	0.079	0.508	500
13352441	M10 x 1	0.295	0.079	0.551	500
13353931	M10 x 1.25	0.472	0.079	0.630	500
13357781	M12 x 1	0.472	0.079	0.642	500
13370771	M12 x 1	0.575	0.079	0.638	500
13379111	M12 x 1.5	0.441	0.079	0.642	500
13386771	M14 x 1.5	0.476	0.079	0.713	500
13387111	M15 x 1.25	0.476	0.079	0.739	500
13393321	M16 x 1.5	0.449	0.079	0.853	300
13394261	M18 x 1.5	0.472	0.079	0.886	300
13395931	M20 x 1.5	0.551	0.079	1.000	500
13397011	M20 x 2	0.551	0.079	1.004	500
13397231	M21 x 1	0.787	0.079	1.102	500
13404911	M22 x 1.5	0.563	0.079	1.114	500
13408471	M24 x 1.5	0.551	0.079	1.299	300
13409481	M24 x 3	0.551	0.079	1.299	300
13410761	M24 x 3.5	0.551	0.079	1.299	300
13411911	M25 x 1.5	0.551	0.079	1.295	300
13419031	M26 x 1.5	0.551	0.079	1.307	300
13419111	M27 x 1.5	0.551	0.079	1.299	300
13420891	M27 x 2	0.551	0.079	1.299	500
13430491	M28 x 1.5	0.561	0.079	1.323	500

TCW Series

Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm				Packaging
	TH	h	h1	D	Carton quantity
	Thread size	Height	Gasket thickness	Outside diameter	
13433331	M28 x 2	14.00	2.00	33.20	500
13434191	M30 x 1.5	14.00	2.00	39.80	300
13434941	M30 x 2	14.00	2.00	39.50	300
13443111	M32 x 2	14.35	2.00	39.50	300
13443281	M35 x 1.5	15.50	2.00	44.00	300
13445201	M36 x 1.5	16.50	2.00	44.90	300
13448281	M36 x 2	16.85	2.00	44.90	200
13448571	M38 x 1.5	17.35	2.00	45.20	200
13458771	M40 x 2.5	17.20	2.00	45.20	200
13459971	M42 x 2	17.00	2.00	50.35	200
13469341	R 1/8"	7.70	2.00	14.15	500
13470281	R 1/4"	11.75	2.00	18.20	200
13472521	R 3/8"	12.50	2.00	21.20	300
13472911	R 1/2"	14.20	2.00	26.00	200
13473461	R 5/8"	13.50	2.00	28.00	200
13482021	R 3/4"	14.20	2.00	33.15	300
13487231	R 1"	14.00	2.00	39.20	300
13489261	R 1-1/4"	17.00	2.00	50.20	50
13493081	R 1-1/2"	16.20	2.00	56.90	50
13495091	R 2"	18.00	2.00	68.00	25
13499371	7/16-20 UNF	12.30	2.00	15.15	300
13501251	1/2-20 UNF	15.15	2.00	18.60	300
13516351	9/16-18 UNF	12.00	2.00	18.80	300
13520231	9/16-24 UNF	12.00	2.00	18.80	300
13522221	5/8-18 UNF	12.00	2.00	21.10	300
13522701	3/4-16 UNF	16.70	2.00	24.25	200
13525311	3/4-16 UNF	20.20	2.00	24.30	200
13528171	11/16-16 UNF	10.00	2.00	22.40	300
13540111	11/16-16 UNF	11.75	2.00	23.00	300
13541711	13/16-16 UNF	11.15	2.00	25.50	500
13549341	13/16-16 UNF	13.00	2.00	26.10	500
13553551	7/8-14 UNF	20.00	2.00	28.20	300
13554961	1-14 UNF	12.00	2.00	33.00	300
13557471	1-14 UNF	14.00	2.00	33.40	300
13559761	1-1/16-12 UNF	14.15	2.00	33.20	300
13560321	1-1/16-12 UNF	23.10	2.00	33.70	200
13561811	1-3/16-12 UNF	13.50	2.00	39.40	300





TCW Series

Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches				Packaging
	TH	h	h1	D	Carton quantity
	Thread size	Height	Gasket thickness	Outside diameter	
13433331	M28 x 2	0.551	0.079	1.307	500
13434191	M30 x 1.5	0.551	0.079	1.567	300
13434941	M30 x 2	0.551	0.079	1.555	300
13443111	M32 x 2	0.565	0.079	1.555	300
13443281	M35 x 1.5	0.610	0.079	1.732	300
13445201	M36 x 1.5	0.650	0.079	1.768	300
13448281	M36 x 2	0.663	0.079	1.768	200
13448571	M38 x 1.5	0.683	0.079	1.780	200
13458771	M40 x 2.5	0.677	0.079	1.780	200
13459971	M42 x 2	0.669	0.079	1.982	200
13469341	R 1/8"	0.303	0.079	0.557	500
13470281	R 1/4"	0.463	0.079	0.717	200
13472521	R 3/8"	0.492	0.079	0.835	300
13472911	R 1/2"	0.559	0.079	1.024	200
13473461	R 5/8"	0.531	0.079	1.102	200
13482021	R 3/4"	0.559	0.079	1.305	300
13487231	R 1"	0.551	0.079	1.543	300
13489261	R 1-1/4"	0.669	0.079	1.976	50
13493081	R 1-1/2"	0.638	0.079	2.240	50
13495091	R 2"	0.709	0.079	2.677	25
13499371	7/16-20 UNF	0.484	0.079	0.596	300
13501251	1/2-20 UNF	0.596	0.079	0.732	300
13516351	9/16-18 UNF	0.472	0.079	0.740	300
13520231	9/16-24 UNF	0.472	0.079	0.740	300
13522221	5/8-18 UNF	0.472	0.079	0.831	300
13522701	3/4-16 UNF	0.657	0.079	0.955	200
13525311	3/4-16 UNF	0.795	0.079	0.957	200
13528171	11/16-16 UNF	0.394	0.079	0.882	300
13540111	11/16-16 UNF	0.463	0.079	0.906	300
13541711	13/16-16 UNF	0.439	0.079	1.004	500
13549341	13/16-16 UNF	0.512	0.079	1.028	500
13553551	7/8-14 UNF	0.787	0.079	1.110	300
13554961	1-14 UNF	0.472	0.079	1.299	300
13557471	1-14 UNF	0.551	0.079	1.315	300
13559761	1-1/16-12 UNF	0.557	0.079	1.307	300
13560321	1-1/16-12 UNF	0.909	0.079	1.327	200
13561811	1-3/16-12 UNF	0.531	0.079	1.551	300





TCW Series

Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm				Packaging
	TH	h	h1	D	Carton quantity
	Thread size	Height	Gasket thickness	Outside diameter	
13562071	1-1/4-12 UNF	14.50	2.00	39.00	300
13562181	1-5/16-12 UNF	13.95	2.00	39.20	300
13565621	1-7/16-12 UNF	16.50	2.00	44.10	200
13569111	1-5/8-12 UNF	17.00	2.00	50.20	100
13577221	1-7/8-12 UNF	17.00	2.00	50.00	100
13580561	1-11/16-12 UNF	17.00	2.00	50.55	100
Part Number	TH	h	h1	D	Carton quantity
	Thread size	Height	Gasket thickness	Outside diameter	
	Dimensions in mm				Packaging





TCW Series

Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches				Packaging
	TH	h	h1	D	Carton quantity
	Thread size	Height	Gasket thickness	Outside diameter	
13562071	1-1/4-12 UNF	0.571	0.079	1.535	300
13562181	1-5/16-12 UNF	0.549	0.079	1.543	300
13565621	1-7/16-12 UNF	0.650	0.079	1.736	200
13569111	1-5/8-12 UNF	0.669	0.079	1.976	100
13577221	1-7/8-12 UNF	0.669	0.079	1.969	100
13580561	1-11/16-12 UNF	0.669	0.079	1.990	100
Part Number	TH	h	h1	D	Carton quantity
	Thread size	Height	Gasket thickness	Outside diameter	
	Dimensions in inches				Packaging





TCF Series

Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Reinforced Ribbed Cap

The TCF Series cap is designed with optimised thread pitch and depth, for secure mechanical locking against accidental dislodgement in deployment. A robust barrier to debris prevents clogging, to enable easy component assembly with no delays for cleaning. External knurling gives extra grip, allowing for application without specialised tools.

Material: Glass Fibre Reinforced Polyamide (PA GF)
Gasket: Thermoplastic Elastomer (TPE)
Temperature Resistance: 200**°C** / 392**°F**

***Also available in a series that includes a gasket**



Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	TH	h	D	TH	h	D	Carton quantity
	Thread size	Height	Outside diameter	Thread size	Height	Outside diameter	
13175181	M8 x 1.25	7.40	12.90	M8 x 1.25	0.291	0.508	500
13100041	M10 x 1	7.50	14.00	M10 x 1	0.295	0.551	500
13117851	M10 x 1.25	12.00	16.00	M10 x 1.25	0.472	0.630	500
13149321	M12 x 1	12.00	16.30	M12 x 1	0.472	0.642	500
13172061	M12 x 1	14.60	16.20	M12 x 1	0.575	0.638	500
13201441	M12 x 1.5	11.20	16.30	M12 x 1.5	0.441	0.642	500
13220011	M14 x 1.5	12.10	18.10	M14 x 1.5	0.476	0.713	500
13223451	M15 x 1.25	12.10	18.78	M15 x 1.25	0.476	0.739	500
13232071	M16 x 1.5	11.40	21.66	M16 x 1.5	0.449	0.853	300
13234701	M18 x 1.5	12.00	22.50	M18 x 1.5	0.472	0.886	300
13243931	M20 x 1.5	14.00	25.40	M20 x 1.5	0.551	1.000	500
13250071	M20 x 2	14.00	25.50	M20 x 2	0.551	1.004	500
13262731	M21 x 1	20.00	28.00	M21 x 1	0.787	1.102	500
13275611	M22 x 1.5	14.30	28.30	M22 x 1.5	0.563	1.114	500
13302961	M24 x 1.5	14.00	33.00	M24 x 1.5	0.551	1.299	300
13309571	M24 x 3	14.00	33.00	M24 x 3	0.551	1.299	300
13332361	M24 x 3.5	14.00	33.00	M24 x 3.5	0.551	1.299	300
13344161	M25 x 1.5	14.00	32.90	M25 x 1.5	0.551	1.295	300
13344721	M26 x 1.5	14.00	33.20	M26 x 1.5	0.551	1.307	300
13381321	M27 x 1.5	14.00	33.00	M27 x 1.5	0.551	1.299	300
13389061	M27 x 2	14.00	33.00	M27 x 2	0.551	1.299	500
13389551	M28 x 1.5	14.25	33.60	M28 x 1.5	0.561	1.323	500

TCF Series

Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88





*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	TH	h	D	TH	h	D	Carton quantity
	Thread size	Height	Outside diameter	Thread size	Height	Outside diameter	
13394511	M28 x 2	14.00	33.20	M28 x 2	0.551	1.307	500
13397051	M30 x 1.5	14.00	39.80	M30 x 1.5	0.551	1.567	300
13412761	M30 x 2	14.00	39.50	M30 x 2	0.551	1.555	300
13422351	M32 x 2	14.35	39.50	M32 x 2	0.565	1.555	300
13426191	M35 x 1.5	15.50	44.00	M35 x 1.5	0.610	1.732	300
13459521	M36 x 1.5	16.50	44.90	M36 x 1.5	0.650	1.768	300
13472891	M36 x 2	16.85	44.90	M36 x 2	0.663	1.768	200
13481681	M38 x 1.5	17.35	45.20	M38 x 1.5	0.683	1.780	200
13494831	M40 x 2.5	17.20	45.20	M40 x 2.5	0.677	1.780	200
13499891	M42 x 2	17.00	50.35	M42 x 2	0.669	1.982	200
13503461	R 1/8"	7.70	14.15	R 1/8"	0.303	0.557	500
13508911	R 1/4"	11.75	18.20	R 1/4"	0.463	0.717	200
13523431	R 3/8"	12.50	21.20	R 3/8"	0.492	0.835	300
13536401	R 1/2"	14.20	26.00	R 1/2"	0.559	1.024	200
13536551	R 5/8"	13.50	28.00	R 5/8"	0.531	1.102	200
13541231	R 3/4"	14.20	33.15	R 3/4"	0.559	1.305	300
13559681	R 1"	14.00	39.20	R 1"	0.551	1.543	300
13571281	R 1-1/4"	17.00	50.20	R 1-1/4"	0.669	1.976	50
13584901	R 1-1/2"	16.20	56.90	R 1-1/2"	0.638	2.240	50
13592281	R 2"	18.00	68.00	R 2"	0.709	2.677	25
13597741	7/16-20 UNF	12.30	15.15	7/16-20 UNF	0.484	0.596	300
13633921	1/2-20 UNF	15.15	18.60	1/2-20 UNF	0.596	0.732	300
13639871	9/16-18 UNF	12.00	18.80	9/16-18 UNF	0.472	0.740	300
13665361	9/16-24 UNF	12.00	18.80	9/16-24 UNF	0.472	0.740	300
13685521	5/8-18 UNF	12.00	21.10	5/8-18 UNF	0.472	0.831	300
13691101	3/4-16 UNF	16.70	24.25	3/4-16 UNF	0.657	0.955	200
13697491	3/4-16 UNF	20.20	24.30	3/4-16 UNF	0.795	0.957	200
13722211	11/16-16 UNF	10.00	22.40	11/16-16 UNF	0.394	0.882	300
13736901	11/16-16 UNF	11.75	23.00	11/16-16 UNF	0.463	0.906	300
13739621	13/16-16 UNF	11.15	25.50	13/16-16 UNF	0.439	1.004	500
13743431	13/16-16 UNF	13.00	26.10	13/16-16 UNF	0.512	1.028	500
13748311	7/8-14 UNF	20.00	28.20	7/8-14 UNF	0.787	1.110	300
13750331	1-14 UNF	12.00	33.00	1-14 UNF	0.472	1.299	300
13752241	1-14 UNF	14.00	33.40	1-14 UNF	0.551	1.315	300
13754421	1-1/16-12 UNF	14.15	33.20	1-1/16-12 UNF	0.557	1.307	300
13755781	1-1/16-12 UNF	23.10	33.70	1-1/16-12 UNF	0.909	1.327	200
13773961	1-3/16-12 UNF	13.50	39.40	1-3/16-12 UNF	0.531	1.551	300

TCF Series

Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	TH	h	D	TH	h	D	Carton quantity
	Thread size	Height	Outside diameter	Thread size	Height	Outside diameter	
13775661	1-1/4-12 UNF	14.50	39.00	1-1/4-12 UNF	0.571	1.535	300
13779411	1-5/16-12 UNF	13.95	39.20	1-5/16-12 UNF	0.549	1.543	300
13779841	1-7/16-12 UNF	16.50	44.10	1-7/16-12 UNF	0.650	1.736	200
13787231	1-5/8-12 UNF	17.00	50.20	1-5/8-12 UNF	0.669	1.976	100
13790951	1-7/8-12 UNF	17.00	50.00	1-7/8-12 UNF	0.669	1.969	100
13810711	1-11/16-12 UNF	17.00	50.55	1-11/16-12 UNF	0.669	1.990	100

Part Number	TH	h	D	TH	h	D	Carton quantity
	Thread size	Height	Outside diameter	Thread size	Height	Outside diameter	
	Dimensions in mm			Dimensions in inches			Packaging



TCE Series

Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Reinforced Ribbed Cap with Gasket

The TCE Series cap is engineered for a high precision fit with component internal threading and an effective seal. Fine contour alignment prevents cross-threading and excludes debris and moisture. Ensuring full and clean connections between threads and their mating parts, the cap maintains full functionality and integrity in harsh conditions.

Material: Glass Fibre Reinforced Polyamide (PA GF)
Gasket: Thermoplastic Elastomer (TPE)
Temperature Resistance: 200**°C** / 392**°F**

***This series includes a gasket**



Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm				Dimensions in inches				Packaging
	TH	h	h1	D	TH	h	h1	D	Carton quantity
	Thread size	Height	Gasket thickness	Outside diameter	Thread size	Height	Gasket thickness	Outside diameter	
13130121	M8 x 1.25	7.40	2.00	12.90	M8 x 1.25	0.291	0.079	0.508	500
13135341	M10 x 1	7.50	2.00	14.00	M10 x 1	0.295	0.079	0.551	500
13140371	M10 x 1.25	12.00	2.00	16.00	M10 x 1.25	0.472	0.079	0.630	500
13168901	M12 x 1	12.00	2.00	16.30	M12 x 1	0.472	0.079	0.642	500
13185801	M12 x 1	14.60	2.00	16.20	M12 x 1	0.575	0.079	0.638	500
13186691	M12 x 1.5	11.20	2.00	16.30	M12 x 1.5	0.441	0.079	0.642	500
13193611	M14 x 1.5	12.10	2.00	18.10	M14 x 1.5	0.476	0.079	0.713	500
13249561	M15 x 1.25	12.10	2.00	18.78	M15 x 1.25	0.476	0.079	0.739	500
13250421	M16 x 1.5	11.40	2.00	21.66	M16 x 1.5	0.449	0.079	0.853	300
13275951	M18 x 1.5	12.00	2.00	22.50	M18 x 1.5	0.472	0.079	0.886	300
13277301	M20 x 1.5	14.00	2.00	25.40	M20 x 1.5	0.551	0.079	1.000	500
13280731	M20 x 2	14.00	2.00	25.50	M20 x 2	0.551	0.079	1.004	500
13292281	M21 x 1	20.00	2.00	28.00	M21 x 1	0.787	0.079	1.102	500
13325061	M22 x 1.5	14.30	2.00	28.30	M22 x 1.5	0.563	0.079	1.114	500
13336431	M24 x 1.5	14.00	2.00	33.00	M24 x 1.5	0.551	0.079	1.299	300
13372081	M24 x 3	14.00	2.00	33.00	M24 x 3	0.551	0.079	1.299	300
13379701	M24 x 3.5	14.00	2.00	33.00	M24 x 3.5	0.551	0.079	1.299	300
13381841	M25 x 1.5	14.00	2.00	32.90	M25 x 1.5	0.551	0.079	1.295	300
13393621	M26 x 1.5	14.00	2.00	33.20	M26 x 1.5	0.551	0.079	1.307	300
13397691	M27 x 1.5	14.00	2.00	33.00	M27 x 1.5	0.551	0.079	1.299	300
13398951	M27 x 2	14.00	2.00	33.00	M27 x 2	0.551	0.079	1.299	500
13401411	M28 x 1.5	14.25	2.00	33.60	M28 x 1.5	0.561	0.079	1.323	500

TCE Series

Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm				Dimensions in inches				Packaging
	TH	h	h1	D	TH	h	h1	D	Carton quantity
	Thread size	Height	Gasket thickness	Outside diameter	Thread size	Height	Gasket thickness	Outside diameter	
13434971	M28 x 2	14.00	2.00	33.20	M28 x 2	0.551	0.079	1.307	500
13439591	M30 x 1.5	14.00	2.00	39.80	M30 x 1.5	0.551	0.079	1.567	300
13442081	M30 x 2	14.00	2.00	39.50	M30 x 2	0.551	0.079	1.555	300
13445681	M32 x 2	14.35	2.00	39.50	M32 x 2	0.565	0.079	1.555	300
13458901	M35 x 1.5	15.50	2.00	44.00	M35 x 1.5	0.610	0.079	1.732	300
13463051	M36 x 1.5	16.50	2.00	44.90	M36 x 1.5	0.650	0.079	1.768	300
13471821	M36 x 2	16.85	2.00	44.90	M36 x 2	0.663	0.079	1.768	200
13476511	M38 x 1.5	17.35	2.00	45.20	M38 x 1.5	0.683	0.079	1.780	200
13495581	M40 x 2.5	17.20	2.00	45.20	M40 x 2.5	0.677	0.079	1.780	200
13513941	M42 x 2	17.00	2.00	50.35	M42 x 2	0.669	0.079	1.982	200
13525491	R 1/8"	7.70	2.00	14.15	R 1/8"	0.303	0.079	0.557	500
13536851	R 1/4"	11.75	2.00	18.20	R 1/4"	0.463	0.079	0.717	200
13546231	R 3/8"	12.50	2.00	21.20	R 3/8"	0.492	0.079	0.835	300
13572171	R 1/2"	14.20	2.00	26.00	R 1/2"	0.559	0.079	1.024	200
13577101	R 5/8"	13.50	2.00	28.00	R 5/8"	0.531	0.079	1.102	200
13600701	R 3/4"	14.20	2.00	33.15	R 3/4"	0.559	0.079	1.305	300
13603131	R 1"	14.00	2.00	39.20	R 1"	0.551	0.079	1.543	300
13616211	R 1-1/4"	17.00	2.00	50.20	R 1-1/4"	0.669	0.079	1.976	50
13616711	R 1-1/2"	16.20	2.00	56.90	R 1-1/2"	0.638	0.079	2.240	50
13620431	R 2"	18.00	2.00	68.00	R 2"	0.709	0.079	2.677	25
13621491	7/16-20 UNF	12.30	2.00	15.15	7/16-20 UNF	0.484	0.079	0.596	300
13623041	1/2-20 UNF	15.15	2.00	18.60	1/2-20 UNF	0.596	0.079	0.732	300
13635521	9/16-18 UNF	12.00	2.00	18.80	9/16-18 UNF	0.472	0.079	0.740	300
13665001	9/16-24 UNF	12.00	2.00	18.80	9/16-24 UNF	0.472	0.079	0.740	300
13667341	5/8-18 UNF	12.00	2.00	21.10	5/8-18 UNF	0.472	0.079	0.831	300
13673741	3/4-16 UNF	16.70	2.00	24.25	3/4-16 UNF	0.657	0.079	0.955	200
13678741	3/4-16 UNF	20.20	2.00	24.30	3/4-16 UNF	0.795	0.079	0.957	200
13688321	11/16-16 UNF	10.00	2.00	22.40	11/16-16 UNF	0.394	0.079	0.882	300
13700511	11/16-16 UNF	11.75	2.00	23.00	11/16-16 UNF	0.463	0.079	0.906	300
13702471	13/16-16 UNF	11.15	2.00	25.50	13/16-16 UNF	0.439	0.079	1.004	500
13705651	13/16-16 UNF	13.00	2.00	26.10	13/16-16 UNF	0.512	0.079	1.028	500
13706861	7/8-14 UNF	20.00	2.00	28.20	7/8-14 UNF	0.787	0.079	1.110	300
13709441	1-14 UNF	12.00	2.00	33.00	1-14 UNF	0.472	0.079	1.299	300
13720461	1-14 UNF	14.00	2.00	33.40	1-14 UNF	0.551	0.079	1.315	300
13738191	1-1/16-12 UNF	14.15	2.00	33.20	1-1/16-12 UNF	0.557	0.079	1.307	300
13787241	1-1/16-12 UNF	23.10	2.00	33.70	1-1/16-12 UNF	0.909	0.079	1.327	200
13794411	1-3/16-12 UNF	13.50	2.00	39.40	1-3/16-12 UNF	0.531	0.079	1.551	300





TCE Series

Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm				Dimensions in inches				Packaging
	TH	h	h1	D	TH	h	h1	D	Carton quantity
	Thread size	Height	Gasket thickness	Outside diameter	Thread size	Height	Gasket thickness	Outside diameter	
13795761	1-1/4-12 UNF	14.50	2.00	39.00	1-1/4-12 UNF	0.571	0.079	1.535	300
13833271	1-5/16-12 UNF	13.95	2.00	39.20	1-5/16-12 UNF	0.549	0.079	1.543	300
13839511	1-7/16-12 UNF	16.50	2.00	44.10	1-7/16-12 UNF	0.650	0.079	1.736	200
13851861	1-5/8-12 UNF	17.00	2.00	50.20	1-5/8-12 UNF	0.669	0.079	1.976	100
13853441	1-7/8-12 UNF	17.00	2.00	50.00	1-7/8-12 UNF	0.669	0.079	1.969	100
13862881	1-11/16-12 UNF	17.00	2.00	50.55	1-11/16-12 UNF	0.669	0.079	1.990	100
Part Number	TH	h	h1	D	TH	h	h1	D	Carton quantity
	Thread size	Height	Gasket thickness	Outside diameter	Thread size	Height	Gasket thickness	Outside diameter	
	Dimensions in mm				Dimensions in inches				Packaging





PEC Series

Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Tethered Cap

The PEC Series cap is constructed for easy application and removal while its strong construction ensures a precise fit and secure seal protection against contaminants such as moisture and dust. The tethered design keeps the cap securely attached to components, removing risk of loss during maintenance or inspection work.

Material: Polyethylene (PE)
Temperature Resistance: 66°C / 150°F

***Two-piece design allows the threaded area to turn without moving the tether**

Red (**-RD**)
RAL 3020

Black (**-BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm					Packaging
	TH	d1	h	L	d2	
	Thread	inside diameter	inside height	Centres	Retaining ring inside diameter	Carton Quantity
13140841	M24 x 2	25.00	25.00	100.00	20.20	400
13360831	M28 x 2	28.50	21.50	110.00	24.20	400
13411701	M28 x 2	28.50	21.50	100.00	20.20	400
13441401	M36 x 2	36.50	25.20	110.00	24.20	200
13647381	M36 x 2	36.50	25.20	135.00	30.00	200
13818211	M42 x 2	43.20	16.00	200.00	37.50	200
Part Number	TH	d1	h	L	d2	Carton Quantity
	Thread	inside diameter	inside height	Centres	Retaining ring inside diameter	
	Dimensions in mm					Packaging

PEC Series

Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches					Packaging
	TH	d1	h	L	d2	
	Thread	inside diameter	inside height	Centres	Retaining ring inside diameter	Carton Quantity
13140841	M24 x 2	0.984	0.984	3.937	0.795	400
13360831	M28 x 2	1.122	0.846	4.331	0.953	400
13411701	M28 x 2	1.122	0.846	3.937	0.795	400
13441401	M36 x 2	1.437	0.992	4.331	0.953	200
13647381	M36 x 2	1.437	0.992	5.315	1.181	200
13818211	M42 x 2	1.701	0.630	7.874	1.476	200
Part Number	TH	d1	h	L	d2	Carton Quantity
	Thread	inside diameter	inside height	Centres	Retaining ring inside diameter	
	Dimensions in inches					Packaging

Plugs

When Air- and Watertightness are Critical

Caplugs plugs ensure reliable sealing of component openings in critical applications. The protection they enable against leaks and contamination is vital in hydraulic and pneumatic assemblies, where air- or watertight seals are imperative for maintaining system integrity.

Available designs include tapered, cylindrical, and hexagonal profiles, each engineered to offer precise conformance to a specific opening. This tailored fit enhances the effectiveness of the seal, protecting system interiors during processing, transportation, and storage.

Built-in features such as pull-tabs or threads facilitate convenient installation and removal, without compromising seal security. These plugs guard components, including containers and pipes, in chemical processing, pharmaceuticals, and water treatment facilities, where strict containment is mandatory.

More details about these products on our website

H Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Sealing Stopper Plug

The H Series stopper plug provides secure protection of boreholes and female threads from moisture, dust and fine particle infiltration. The rounded design allows easy handling and seamless insertion without specialised tools, for versatile efficiency in fast-paced processes. Durable and flexible construction enables reuse and extends working life.

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°**C** / 150°**F**

***Also available in other materials**

Clear (-**CL**)
RAL 9003

Black (-**BK**)
RAL 9017

Yellow (-**YL**)
RAL 1016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits threaded hole size			Dimensions in mm				Packaging
	Metric coarse	Metric fine	Imperial	D Outside diameter	H Outside height	D1 Flange diameter	d Inside diameter	Quantity per bag
19100824				6.30	4.00	9.60	3.70	5000
19107024	M8	M8 x 1		7.20	5.50	11.20	5.20	5000
19107504	M9			8.40	5.50	11.00	6.40	5000
19113944	M10	M10 x 1.25, M10 x 1	G 1/8	9.20	5.50	14.40	7.00	5000
19130184	M12	M12 x 1.5		10.10	5.50	14.40	8.20	5000
19138184	M12	M12 x 1.5		10.60	5.50	14.40	8.80	5000
19139094		M12 x 1.25, M12 x 1		11.30	5.50	14.40	9.50	5000
19156134				11.80	5.50	14.40	10.00	5000
19162244	M14		G 1/4	12.30	7.00	18.70	10.40	1000
19163974		M14 x 1.5, M14 x 1.25		13.00	7.00	18.70	11.10	1000
19167004		M14 x 1.5, M14 x 1.25		13.30	7.00	18.70	11.40	1000
19171864		M14 x 1		13.60	7.00	18.70	11.70	1000
19215334	M16	M16 x 1.5		14.00	7.00	18.70	12.10	1000
19218834	M16			14.40	7.00	18.70	12.30	1000
19230034		M16 x 1.5		15.00	7.00	18.70	12.90	1000
19230324	M18	M16 x 1	G 3/8	15.80	7.00	18.70	13.80	1000
19236964		M18 x 2, M18 x 1.5, M18 x 1	G 3/8	16.50	7.00	18.70	14.50	1000
19253174		M18 x 2, M18 x 1.5, M18 x 1		17.10	9.00	24.60	15.20	1000
19262084	M20	M20 x 2		17.80	9.00	24.60	15.90	1000
19271604		M20 x 2, M20 x 1.5, M20 x 1		18.50	9.00	24.60	16.50	1000

9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

H Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits threaded hole size			Dimensions in inches				Packaging
	Metric coarse	Metric fine	Imperial	D Outside diameter	H Outside height	D1 Flange diameter	d Inside diameter	Quantity per bag
19100824				0.248	0.157	0.378	0.146	5000
19107024	M8	M8 x 1		0.283	0.217	0.441	0.205	5000
19107504	M9			0.331	0.217	0.433	0.252	5000
19113944	M10	M10 x 1.25, M10 x 1	G 1/8	0.362	0.217	0.567	0.276	5000
19130184	M12	M12 x 1.5		0.398	0.217	0.567	0.323	5000
19138184	M12	M12 x 1.5		0.417	0.217	0.567	0.346	5000
19139094		M12 x 1.25, M12 x 1		0.445	0.217	0.567	0.374	5000
19156134				0.465	0.217	0.567	0.394	5000
19162244	M14		G 1/4	0.484	0.276	0.736	0.409	1000
19163974		M14 x 1.5, M14 x 1.25		0.512	0.276	0.736	0.437	1000
19167004		M14 x 1.5, M14 x 1.25		0.524	0.276	0.736	0.449	1000
19171864		M14 x 1		0.535	0.276	0.736	0.461	1000
19215334	M16	M16 x 1.5		0.551	0.276	0.736	0.476	1000
19218834	M16			0.567	0.276	0.736	0.484	1000
19230034		M16 x 1.5		0.591	0.276	0.736	0.508	1000
19230324	M18	M16 x 1	G 3/8	0.622	0.276	0.736	0.543	1000
19236964		M18 x 2, M18 x 1.5, M18 x 1	G 3/8	0.650	0.276	0.736	0.571	1000
19253174		M18 x 2, M18 x 1.5, M18 x 1		0.673	0.354	0.969	0.598	1000
19262084	M20	M20 x 2		0.701	0.354	0.969	0.626	1000
19271604		M20 x 2, M20 x 1.5, M20 x 1		0.728	0.354	0.969	0.650	1000



9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

H Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits threaded hole size			Dimensions in mm				Packaging
	Metric coarse	Metric fine	Imperial	D Outside diameter	H Outside height	D1 Flange diameter	d Inside diameter	Quantity per bag
19274024				18.90	9.00	24.60	16.80	1000
19279284				19.20	3.80	24.60	17.50	1000
19284164	M22	M22 x 2	G 1/2	19.50	9.00	24.60	17.50	1000
19284594	M22	M22 x 1.5		20.10	9.00	24.60	18.10	1000
19286604	M22	M22 x 1.5		20.70	9.00	24.60	18.40	1000
19292274	M24		G 5/8	21.20	9.00	24.60	19.00	1000
19292414	M24		G 5/8	21.70	9.00	24.60	19.40	1000
19296214		M24 x 1.5		22.40	9.00	24.60	20.20	1000
19296884		M24 x 1.5		23.00	9.00	28.50	20.80	1000
19297204				23.60	9.00	28.50	21.50	1000
19300794	M27			24.00	9.00	28.50	21.90	1000
19302714	M27			24.60	9.00	28.50	22.50	1000
19302774		M27 x 2, M27 x 1.5	G 3/4	25.50	9.00	28.50	23.40	1000
19318444	M30			26.50	9.00	28.50	24.60	1000
19321624	M30			27.00	12.00	34.80	24.80	1000
19324054		M30 x 3		27.50	12.00	34.80	25.30	1000
19327244	M33	M30 x 2, M30 x 1.5	G 7/8	28.80	12.00	34.80	26.60	1000
19333864	M33		G 1	30.50	12.00	34.80	27.30	1000
19333934	M36	M33 x 2, M33 x 1.5	G 1	31.70	12.00	34.80	28.60	1000
19362784	M36	M33 x 2, M33 x 1.5, M36 x 3		32.60	12.00	34.80	29.70	1000
19367004	M39	M36 x 2, M36 x 1.5		34.60	12.00	40.40	31.60	500
19369124	M39	M36 x 1.5, M39 x 3	G 1-1/8	35.50	12.00	40.40	32.30	500
19392134	M39	M39 x 3		36.70	12.00	40.40	33.60	500
19406184	M39	M39 x 2		36.70	8.00	40.40	33.60	250
19406454	M42	M39 x 1.5, M42 x 3		39.00	16.00	49.30	35.30	500
19414274	M45	M42 x 2, M42 x 1.5	G 1-1/4	40.70	16.00	49.30	37.00	500
19417504	M48	M45 x 3	G 1-3/8	42.50	16.00	49.30	38.80	500
19426794		M48 x 3, M48 x 2, M48 x 1.5	G 1-1/2	46.20	18.00	58.70	41.90	500
19429214		M56 x 4	G 1-3/4	51.50	18.00	58.70	47.50	250
19429424	M60	M56 x 4, M56 x 3, M56 x 2	G 1-3/4	54.10	18.00	58.70	49.20	500
19430204	M64	M60 x 4, M60 x 2, M60 x 1.5	G 2	58.20	18.00	64.80	53.30	500
19462054	M64			59.60	18.00	73.50	54.50	500
19469304		M75 x 1.5	G 2-1/2	73.70	17.40	82.30	68.70	250
19477454		M80 x 4	G 2-3/4	80.80	17.40	92.50	75.80	250
19481674	M80	M76 x 2	G 3	86.50	17.40	99.30	81.30	250
19483174		M100 x 2	G 3-1/2	98.80	17.40	112.00	93.50	200





9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

H Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits threaded hole size			Dimensions in inches				Packaging
	Metric coarse	Metric fine	Imperial	D Outside diameter	H Outside height	D1 Flange diameter	d Inside diameter	Quantity per bag
19274024				0.744	0.354	0.969	0.661	1000
19279284				0.756	0.150	0.969	0.689	1000
19284164	M22	M22 x 2	G 1/2	0.768	0.354	0.969	0.689	1000
19284594	M22	M22 x 1.5		0.791	0.354	0.969	0.713	1000
19286604	M22	M22 x 1.5		0.815	0.354	0.969	0.724	1000
19292274	M24		G 5/8	0.835	0.354	0.969	0.748	1000
19292414	M24		G 5/8	0.854	0.354	0.969	0.764	1000
19296214		M24 x 1.5		0.882	0.354	0.969	0.795	1000
19296884		M24 x 1.5		0.906	0.354	1.122	0.819	1000
19297204				0.929	0.354	1.122	0.846	1000
19300794	M27			0.945	0.354	1.122	0.862	1000
19302714	M27			0.969	0.354	1.122	0.886	1000
19302774		M27 x 2, M27 x 1.5	G 3/4	1.004	0.354	1.122	0.921	1000
19318444	M30			1.043	0.354	1.122	0.969	1000
19321624	M30			1.063	0.472	1.370	0.976	1000
19324054		M30 x 3		1.083	0.472	1.370	0.996	1000
19327244	M33	M30 x 2, M30 x 1.5	G 7/8	1.134	0.472	1.370	1.047	1000
19333864	M33		G 1	1.201	0.472	1.370	1.075	1000
19333934	M36	M33 x 2, M33 x 1.5	G 1	1.248	0.472	1.370	1.126	1000
19362784	M36	M33 x 2, M33 x 1.5, M36 x 3		1.283	0.472	1.370	1.169	1000
19367004	M39	M36 x 2, M36 x 1.5		1.362	0.472	1.591	1.244	500
19369124	M39	M36 x 1.5, M39 x 3	G 1-1/8	1.398	0.472	1.591	1.272	500
19392134	M39	M39 x 3		1.445	0.472	1.591	1.323	500
19406184	M39	M39 x 2		1.445	0.315	1.591	1.323	250
19406454	M42	M39 x 1.5, M42 x 3		1.535	0.630	1.941	1.390	500
19414274	M45	M42 x 2, M42 x 1.5	G 1-1/4	1.602	0.630	1.941	1.457	500
19417504	M48	M45 x 3	G 1-3/8	1.673	0.630	1.941	1.528	500
19426794		M48 x 3, M48 x 2, M48 x 1.5	G 1-1/2	1.819	0.709	2.311	1.650	500
19429214		M56 x 4	G 1-3/4	2.028	0.709	2.311	1.870	250
19429424	M60	M56 x 4, M56 x 3, M56 x 2	G 1-3/4	2.130	0.709	2.311	1.937	500
19430204	M64	M60 x 4, M60 x 2, M60 x 1.5	G 2	2.291	0.709	2.551	2.098	500
19462054	M64			2.346	0.709	2.894	2.146	500
19469304		M75 x 1.5	G 2-1/2	2.902	0.685	3.240	2.705	250
19477454		M80 x 4	G 2-3/4	3.181	0.685	3.642	2.984	250
19481674	M80	M76 x 2	G 3	3.406	0.685	3.909	3.201	250
19483174		M100 x 2	G 3-1/2	3.890	0.685	4.409	3.681	200





9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

H Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits threaded hole size			Dimensions in mm				Packaging
	Metric coarse	Metric fine	Imperial	D Outside diameter	H Outside height	D1 Flange diameter	d Inside diameter	Quantity per bag
19489844		M115 x 4	G 4	111.70	17.40	123.00	106.40	200

Part Number	Metric coarse	Metric fine	Imperial	D Outside diameter	H Outside height	D1 Flange diameter	d Inside diameter	Quantity per bag
	Fits threaded hole size			Dimensions in mm				Packaging





9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

H Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits threaded hole size			Dimensions in inches				Packaging
	Metric coarse	Metric fine	Imperial	D Outside diameter	H Outside height	D1 Flange diameter	d Inside diameter	Quantity per bag
19489844		M115 x 4	G 4	4.398	0.685	4.843	4.189	200

Part Number	Metric coarse	Metric fine	Imperial	D Outside diameter	H Outside height	D1 Flange diameter	d Inside diameter	Quantity per bag
	Fits threaded hole size			Dimensions in inches				Packaging





9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

LL Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

High-Fidelity-Fit Plug

The LL Series lug stopper secures threaded hole dimensions with high fidelity. Diameter and thread count matching ensure a perfect snug fit, preserving internal integrity. Material ingress is blocked while residue-free removal efficiently eliminates reworking. The design enables easy installation or extraction while preventing warping or breaking.



Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°**C** / 150°**F**

***External rings help the plug to grip**

Red (-**RD**)
RAL 3000

Clear (-**CL**)
RAL 9003

Blue (-**BL**)
RAL 5015

Yellow (-**YL**)
RAL 1016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Fits	Dimensions in mm					Packaging
		D	H	L	D1	d	
		Outside diameter	Height	Centre to handle end	Flange diameter	Inside diameter	Quantity per bag
19194764	M5	4.70	5.50	16.60	9.00	0.06	10000
19408354	M10 x 1, G 1/8	9.50	8.00	23.50	16.00	0.20	5000
19547814	M12 x 1.5	11.10	8.00	25.00	19.00	0.26	2500
19667424	M14 x 1.5	13.10	10.00	26.00	21.00	0.33	2500
19807134	M16 x 1.5	15.10	11.00	28.50	24.00	0.41	2500
19831014	M18 x 1.5	17.20	11.00	27.00	25.50	0.51	2500
19924384	M22 x 1.5	21.50	11.50	31.00	29.00	0.63	2500

Part Number	Fits	D	H	L	D1	d	Quantity per bag
		Outside diameter	Height	Centre to handle end	Flange diameter	Inside diameter	
		Dimensions in mm					Packaging

9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

LL Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**





Part Number	Fits	Dimensions in inches					Packaging
		D	H	L	D1	d	
		Outside diameter	Height	Centre to handle end	Flange diameter	Inside diameter	Quantity per bag
19194764	M5	0.185	0.217	0.654	0.354	0.002	10000
19408354	M10 x 1, G 1/8	0.374	0.315	0.925	0.630	0.008	5000
19547814	M12 x 1.5	0.437	0.315	0.984	0.748	0.010	2500
19667424	M14 x 1.5	0.516	0.394	1.024	0.827	0.013	2500
19807134	M16 x 1.5	0.594	0.433	1.122	0.945	0.016	2500
19831014	M18 x 1.5	0.677	0.433	1.063	1.004	0.020	2500
19924384	M22 x 1.5	0.846	0.453	1.220	1.142	0.025	2500

Part Number	Fits	D	H	L	D1	d	Quantity per bag
		Outside diameter	Height	Centre to handle end	Flange diameter	Inside diameter	
		Dimensions in inches					Packaging

9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

LH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Long Lug Plug

The LH Series stopper is specially designed to withstand the dynamic stress of fluid pulsation, mechanical vibration and pressure fluctuation. Close protection of compression fittings maintains hydraulic system cleanliness and integrity by excluding dirt and moisture. Practical design enables easy engagement and release for efficient maintenance.

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°**C** / 150°**F**

***External rings help the plug to grip**

Red (-**RD**)
RAL 3000

Clear (-**CL**)
RAL 9003

Blue (-**BL**)
RAL 5015

Yellow (-**YL**)
RAL 1016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Fits	Dimensions in mm				Packaging
		D	H	L	D1	
		Outside diameter	Height	Centre to handle end	Flange diameter	Quantity per bag
19178404	DKO 6L	11.80	7.00	18.00	16.00	2500
19207244	DKO 6S, 8L	13.80	7.00	19.50	19.00	2500
19301484	DKO 8S, 10L	15.80	7.00	23.00	21.50	2500
19402444	DKO 10S, 12L	17.80	7.50	25.00	25.00	2500
19426494	DKO 12S	19.80	7.50	26.00	27.00	2500
19481574	DKO 14S, 15L	21.80	7.50	31.00	29.00	2500
19490944	DKO 16S	23.80	7.50	31.00	30.00	2500
19615384	DKO 18L	25.80	8.00	31.00	32.00	1000
19666554	DKO 20S, 22L	29.50	10.00	31.50	35.00	500
19732264	DKO 25S, 28L	35.50	10.00	34.00	40.00	500
19769114	DKO 30S	41.50	10.00	40.00	50.00	500
19774784	DKO 35L	44.50	10.00	40.00	50.00	500
19808544	DKO 38S, 42L	51.50	10.00	45.00	60.00	500
19847814	G 1/4	13.00	7.00	19.50	19.00	5000
19859524	G 3/8	16.30	7.00	23.00	21.50	5000
19897874	G 1/2	20.60	7.50	26.00	27.00	2500
19925584	G 3/4	31.00	8.00	31.00	32.00	2500
19970864	G 1	32.50	10.00	34.00	40.00	500
Part Number	Fits	D	H	L	D1	Quantity per bag
		Outside diameter	Height	Centre to handle end	Flange diameter	
		Dimensions in mm				Packaging

9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

LH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88





*For more information visit our website: **www.caplugs.eu**

Part Number	Fits	Dimensions in inches				Packaging
		D	H	L	D1	
		Outside diameter	Height	Centre to handle end	Flange diameter	Quantity per bag
19178404	DKO 6L	0.465	0.276	0.709	0.630	2500
19207244	DKO 6S, 8L	0.543	0.276	0.768	0.748	2500
19301484	DKO 8S, 10L	0.622	0.276	0.906	0.846	2500
19402444	DKO 10S, 12L	0.701	0.295	0.984	0.984	2500
19426494	DKO 12S	0.780	0.295	1.024	1.063	2500
19481574	DKO 14S, 15L	0.858	0.295	1.220	1.142	2500
19490944	DKO 16S	0.937	0.295	1.220	1.181	2500
19615384	DKO 18L	1.016	0.315	1.220	1.260	1000
19666554	DKO 20S, 22L	1.161	0.394	1.240	1.378	500
19732264	DKO 25S, 28L	1.398	0.394	1.339	1.575	500
19769114	DKO 30S	1.634	0.394	1.575	1.969	500
19774784	DKO 35L	1.752	0.394	1.575	1.969	500
19808544	DKO 38S, 42L	2.028	0.394	1.772	2.362	500
19847814	G 1/4	0.512	0.276	0.768	0.748	5000
19859524	G 3/8	0.642	0.276	0.906	0.846	5000
19897874	G 1/2	0.811	0.295	1.024	1.063	2500
19925584	G 3/4	1.220	0.315	1.220	1.260	2500
19970864	G 1	1.280	0.394	1.339	1.575	500
Part Number	Fits	D	H	L	D1	Quantity per bag
		Outside diameter	Height	Centre to handle end	Flange diameter	
		Dimensions in inches				Packaging

9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

LB Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Uniform Pressure Plug

The LB Series lug stopper reduces abrasion on insertion and enables uniform pressure distribution, critical in preventing thread distortion. The profile ensures robust hole sealing against contaminant entry and built-in durability maintains full sealing properties, even after multiple applications. Ergonomic shaping allows for safe, easy handling.

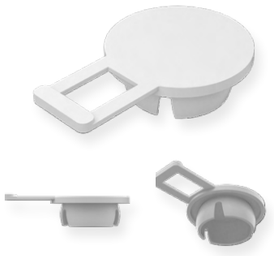



Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°**C** / 150°**F**

***Split ring design adds flexibility**

Clear (-**CL**)
RAL 9003

Red (-**RD**)
RAL 3000

Blue (-**BL**)
RAL 5015

Yellow (-**YL**)
RAL 1016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Fits threaded hole size	Dimensions in mm				Packaging
		D	H	L	D1	
		Outside diameter	Height	Centre to handle end	Flange diameter	Quantity per bag
19502304	M10 x 1	9.50	8.50	26.50	16.50	1000
19502834	M12 x 1.5	11.20	8.50	26.50	19.50	1000
19521514	M14 x 1.5	13.40	7.00	27.00	21.50	1000
19529654	M16 x 1.5	15.20	8.00	27.00	23.50	1000
19541134	M22 x 1.5	21.70	8.00	31.00	29.50	1000

Part Number	Fits threaded hole size	D	H	L	D1	Quantity per bag
		Outside diameter	Height	Centre to handle end	Flange diameter	
		Dimensions in mm				Packaging

9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

LB Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88





*For more information visit our website: **www.caplugs.eu**

Part Number	Fits threaded hole size	Dimensions in inches				Packaging
		D	H	L	D1	
		Outside diameter	Height	Centre to handle end	Flange diameter	Quantity per bag
19502304	M10 x 1	0.374	0.335	1.043	0.650	1000
19502834	M12 x 1.5	0.441	0.335	1.043	0.768	1000
19521514	M14 x 1.5	0.528	0.276	1.063	0.846	1000
19529654	M16 x 1.5	0.598	0.315	1.063	0.925	1000
19541134	M22 x 1.5	0.854	0.315	1.220	1.161	1000

Part Number	Fits threaded hole size	D	H	L	D1	Quantity per bag
		Outside diameter	Height	Centre to handle end	Flange diameter	
		Dimensions in inches				Packaging

9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

PSN Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Tab-Free Plug

The PSN Series plug is designed without a tab to offer a streamlined solution for sealing and protection where a more integrated, non-protruding profile is needed. The smooth surface stays clear of surrounding components without risk of snagging or accidental removal. A secure fit resists contaminants even in fluctuating temperatures.

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°C / 150°F

***Also available with the tab**

Red (-**RD**)
RAL 3020

Black (-**BK**)
RAL 9005

Green (-**GN**)
RAL 6018

Yellow (-**YL**)
RAL 1018

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

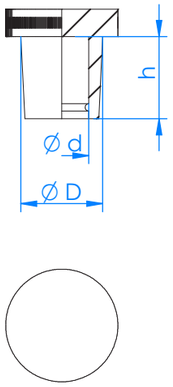

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	D	h	d	D	h	d	
	Outside diameter	Inside height	Inside diameter	Outside diameter	Inside height	Inside diameter	Carton quantity
19112511	9.30	9.00	5.80	0.366	0.354	0.228	1000

Part Number	D	h	d	D	h	d	Carton quantity
	Outside diameter	Inside height	Inside diameter	Outside diameter	Inside height	Inside diameter	
	Dimensions in mm			Dimensions in inches			Packaging

PST Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Tabbed Plug

The PST Series plug with built-in tab enables quick and easy removal for enhanced operational efficiency. Robust design resists physical wear and tear and exposure to industrial chemicals without loss of integrity and functionality. Highly effective sealing against dust, moisture and debris is maintained through changing temperatures.

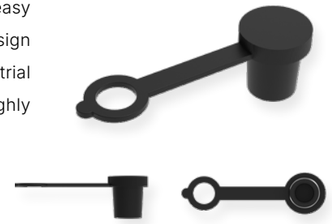

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°C / 150°F

***Also available without the tab**

Black (-**BK**)
RAL 9005

Red (-**RD**)
RAL 3020

Green (-**GN**)
RAL 6018

Yellow (-**YL**)
RAL 1018

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm				Dimensions in inches				Packaging
	D	h	L	d	D	h	L	d	
	Outside diameter	Inside height	Centres	Inside diameter	Outside diameter	Inside height	Centres	Inside diameter	Carton quantity
19302351	9.30	9.00	29.00	5.80	0.366	0.354	1.142	0.228	1000

Part Number	D	h	L	d	D	h	L	d	Carton quantity
	Outside diameter	Inside height	Centres	Inside diameter	Outside diameter	Inside height	Centres	Inside diameter	
	Dimensions in mm				Dimensions in inches				Packaging

GEO Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Flexible Pull-Tab Plug

The GEO Series plug is flexible and durable for tight and adaptable sealing against leakage, chemicals, and contaminants, including dust and moisture. The design incorporates a pull- tab to enable fast and easy insertion and extraction, ideal for frequent access to the sealed area. Temperature range resilience increases versatility.



Material: Thermoplastic Elastomer (TPE)
Temperature Resistance: 135°**C** / 275°**F**

***Can be used to protect the first thread and the hole**

Yellow (-**YL**)
RAL 1018

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm				Dimensions in inches				Packaging
	D1	D	H1	H	D1	D	H1	H	
	Outside diameter	Flange diameter	Height	Overall height	Outside diameter	Flange diameter	Height	Overall height	Carton quantity
19116011	5.30	12.60	8.00	17.50	0.209	0.496	0.315	0.689	2000
19248271	7.00	15.50	8.00	17.50	0.276	0.610	0.315	0.689	1500
19380141	9.50	17.60	8.00	22.00	0.374	0.693	0.315	0.866	1000
19393501	11.50	19.80	9.80	22.50	0.453	0.780	0.386	0.886	500
19693551	13.60	18.00	9.00	23.70	0.535	0.709	0.354	0.933	400
19703331	13.45	21.50	8.50	22.30	0.530	0.846	0.335	0.878	400
19782811	15.50	23.00	8.70	23.00	0.610	0.906	0.343	0.906	300
19814101	17.70	25.50	9.00	24.00	0.697	1.004	0.354	0.945	200
19814331	18.50	25.00	8.65	26.00	0.728	0.984	0.341	1.024	200
19949501	21.00	26.50	9.00	25.00	0.827	1.043	0.354	0.984	200

Part Number	D1	D	H1	H	D1	D	H1	H	Carton quantity
	Outside diameter	Flange diameter	Height	Overall height	Outside diameter	Flange diameter	Height	Overall height	
	Dimensions in mm				Dimensions in inches				Packaging

Find the Perfect Fit with Free Product Samples

At Caplugs, your confidence in choosing the right solution matters to us. That's why we offer free samples for many of our products, covering almost our entire range. So you can see, test, and compare options in your own application before making a purchase. There's no cost and no obligation, just an easy way to make the right decision with complete peace of mind.

With our free sample program, you can:

- **Test multiple sizes and designs** to ensure the best fit for your application
- **Evaluate product performance** in real-world conditions
- **Compare options side by side** before committing to a purchase
- **Reduce risk and eliminate guesswork** from the selection process
- **Move forward with confidence**, knowing you've chosen the right solution

We've designed this service to make your selection process simple, efficient, and worry-free.

Scan the QR-code for free samples

M Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Profiled Lug Plug

The M Series stopper is conically profiled to align closely to threaded opening geometry, sealing precisely to prevent fluid or debris entry. Eliminating even minor contamination protects connection cleanliness and integrity for operational reliability. Durability extends working life and grip-enhancing design keeps the stopper firmly in place.

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°**C** / 150°**F**

***Can be used as a cap or a plug**

Yellow (-**YL**)
RAL 1016



Clear (-**CL**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

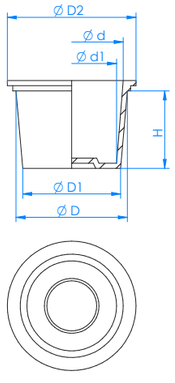

*Some part dimensions may vary. Please request samples to confirm suitability.
*For more information visit our website: **www.caplugs.eu**

Part Number	Fits Metric thread as a plug	Fits Pipe thread as a plug	Dimensions in mm						Packaging
			D	D1	h	D2	d	d1	
			Outside diameter	Outside diameter	Height	Flange diameter	Inside diameter	Inside diameter	Quantity per Bag
13119444	M6, M6 x 0.5		6,20	4,40	10,00	10,00	4,60	2,80	5000
13130554	M8 x 1		7,80	6,00	10,00	11,00	6,20	4,40	5000
13130754	M10		9,40	7,60	10,00	13,00	7,80	6,00	5000
13156684	M12		11,00	9,20	10,00	14,00	9,30	7,50	5000
13158954	M12 x 1.5		11,70	9,90	10,00	15,00	10,10	8,30	5000
13160764	M14		12,40	10,60	10,00	16,00	10,80	9,00	1000
13161214	M14 x 1.5	G 1/4	13,10	11,30	10,00	17,00	11,20	9,50	5000
13183254			14,10	12,00	12,00	18,00	12,50	10,40	1000
13200454	M16		14,60	12,50	12,00	18,00	13,30	11,20	1000
13203334	M16 x 1.5		15,60	13,50	12,00	19,00	14,00	11,90	1000
13233884	M18		G 3/8	14,00	12,00	19,00	14,50	12,40	1000
13240294			17,00	14,70	13,00	21,00	15,50	13,20	1000
13242354	M20		18,60	16,30	13,00	22,00	17,00	14,70	1000
13263054	M20 x 1.5		19,40	17,10	13,00	22,00	17,80	15,50	1000
13291534		G 1/2	20,10	17,50	15,00	24,00	18,50	15,90	1000
13305644	M22, M20 x 1		21,00	18,40	15,00	25,00	19,40	16,80	1000
13311474	M24, M22 x 1.5		21,60	19,00	15,00	25,00	20,00	17,40	1000
13314494	M22 x 1	G 5/8	23,20	20,40	17,00	27,00	21,60	18,80	1000
13335104	M24 x 1.5		23,50	20,70	16,00	28,00	21,90	19,10	500
13340324			24,80	22,00	16,00	29,00	23,20	20,40	500
13342744	M26 x 1.5	G 3/4	26,30	23,20	18,00	30,00	24,40	21,20	500
13378774	M30		27,80	24,50	19,00	32,00	26,20	22,90	500

9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

M Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*Some part dimensions may vary. Please request samples to confirm suitability.
*For more information visit our website: **www.caplugs.eu**

Part Number	Fits Metric thread as a plug	Fits Pipe thread as a plug	Dimensions in inches						Packaging
			D	D1	h	D2	d	d1	
			Outside diameter	Outside diameter	Height	Flange diameter	Inside diameter	Inside diameter	Quantity per Bag
13119444	M6, M6 x 0.5		0,244	0,173	0,394	0,394	0,181	0,110	5000
13130554	M8 x 1		0,307	0,236	0,394	0,433	0,244	0,173	5000
13130754	M10		0,370	0,299	0,394	0,512	0,307	0,236	5000
13156684	M12		0,433	0,362	0,394	0,551	0,366	0,295	5000
13158954	M12 x 1.5		0,461	0,390	0,394	0,591	0,398	0,327	5000
13160764	M14		0,488	0,417	0,394	0,630	0,425	0,354	1000
13161214	M14 x 1.5	G 1/4	0,516	0,445	0,394	0,669	0,441	0,374	5000
13183254			0,555	0,472	0,472	0,709	0,492	0,409	1000
13200454	M16		0,575	0,492	0,472	0,709	0,524	0,441	1000
13203334	M16 x 1.5		0,614	0,531	0,472	0,748	0,551	0,469	1000
13233884	M18		0,634	0,551	0,472	0,748	0,571	0,488	1000
13240294			0,669	0,579	0,512	0,827	0,610	0,520	1000
13242354	M20		0,732	0,642	0,512	0,866	0,669	0,579	1000
13263054	M20 x 1.5		0,764	0,673	0,512	0,866	0,701	0,610	1000
13291534		G 1/2	0,791	0,689	0,591	0,945	0,728	0,626	1000
13305644	M22, M20 x 1		0,827	0,724	0,591	0,984	0,764	0,661	1000
13311474	M24, M22 x 1.5		0,850	0,748	0,591	0,984	0,787	0,685	1000
13314494	M22 x 1	G 5/8	0,913	0,803	0,669	1,063	0,850	0,740	1000
13335104	M24 x 1.5		0,925	0,815	0,630	1,102	0,862	0,752	500
13340324			0,976	0,866	0,630	1,142	0,913	0,803	500
13342744	M26 x 1.5	G 3/4	1,035	0,913	0,709	1,181	0,961	0,835	500
13378774	M30		1,094	0,965	0,748	1,260	1,031	0,902	500

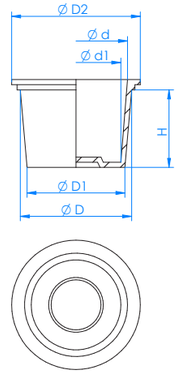

9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

M Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*Some part dimensions may vary. Please request samples to confirm suitability.

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits Metric thread as a plug	Fits Pipe thread as a plug	Dimensions in mm						Packaging
			D	D1	h	D2	d	d1	
			Outside diameter	Outside diameter	Height	Flange diameter	Inside diameter	Inside diameter	Quantity per Bag
13382554	M28 x 1.5		29,20	25,20	19,00	33,00	27,70	23,70	500
13386624	M33, M30 x 1.5		31,10	27,80	19,00	35,00	29,50	26,20	500
13396264	M36, M32 x 1.5	G 1	32,60	29,80	16,00	37,00	31,10	28,30	500
13401754			35,10	31,40	21,00	38,00	33,40	29,70	500
13408544	M36 x 1.5	G 1-1/8	37,10	33,30	22,00	41,00	35,50	31,70	500
13415684	M42, M40 x 1.5		40,50	36,70	21,00	45,00	39,00	35,20	250
13417854	M45		43,00	38,20	23,00	48,00	41,40	36,60	250
13474034	M48, M42 x 1.5	G 1-3/8	42,90	39,60	19,00	48,00	41,30	38,00	250
13477844	M45 x 1.5		44,70	41,40	19,00	49,00	43,00	39,70	250
13483574	M52		47,70	44,40	19,00	51,00	46,10	42,80	250
13489394	M48 x 1.5		49,60	45,20	25,00	54,00	48,00	43,60	250
13497054	M56		51,00	46,60	25,00	55,00	49,60	45,20	100
13500374	M60	G 1-3/4	56,90	52,50	25,00	62,00	55,20	50,80	100
13560894	M64		59,30	54,00	25,00	65,00	57,80	52,50	100
13568304		G 2	58,60	54,20	25,00	65,00	57,00	52,60	100
13631424	M68, M60 x 1.5		62,80	58,40	25,00	67,00	61,10	56,70	100
13639164	M64 x 1.5	G 2-1/4	67,10	60,70	29,00	71,00	64,30	59,00	100
13662104	M70 x 1.5		70,40	67,10	19,00	75,00	68,70	65,40	100
13691854	M75 x 1.5	G 2-1/2	75,70	72,40	19,00	83,00	74,10	70,80	100
13700204		G 3	87,80	84,50	19,00	92,00	85,70	82,40	100





9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

Part Number	Fits Metric thread as a plug	Fits Pipe thread as a plug	D	D1	h	D2	d	d1	Quantity per Bag
			Outside diameter	Outside diameter	Height	Flange diameter	Inside diameter	Inside diameter	
			Dimensions in mm						Packaging

M Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*Some part dimensions may vary. Please request samples to confirm suitability.

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits Metric thread as a plug	Fits Pipe thread as a plug	Dimensions in inches						Packaging
			D	D1	h	D2	d	d1	
			Outside diameter	Outside diameter	Height	Flange diameter	Inside diameter	Inside diameter	Quantity per Bag
13382554	M28 x 1.5		1,150	0,992	0,748	1,299	1,091	0,933	500
13386624	M33, M30 x 1.5		1,224	1,094	0,748	1,378	1,161	1,031	500
13396264	M36, M32 x 1.5	G 1	1,283	1,173	0,630	1,457	1,224	1,114	500
13401754			1,382	1,236	0,827	1,496	1,315	1,169	500
13408544	M36 x 1.5	G 1-1/8	1,461	1,311	0,866	1,614	1,398	1,248	500
13415684	M42, M40 x 1.5		1,594	1,445	0,827	1,772	1,535	1,386	250
13417854	M45		1,693	1,504	0,906	1,890	1,630	1,441	250
13474034	M48, M42 x 1.5	G 1-3/8	1,689	1,559	0,748	1,890	1,626	1,496	250
13477844	M45 x 1.5		1,760	1,630	0,748	1,929	1,693	1,563	250
13483574	M52		1,878	1,748	0,748	2,008	1,815	1,685	250
13489394	M48 x 1.5		1,953	1,780	0,984	2,126	1,890	1,717	250
13497054	M56		2,008	1,835	0,984	2,165	1,953	1,780	100
13500374	M60	G 1-3/4	2,240	2,067	0,984	2,441	2,173	2,000	100
13560894	M64		2,335	2,126	0,984	2,559	2,276	2,067	100
13568304		G 2	2,307	2,134	0,984	2,559	2,244	2,071	100
13631424	M68, M60 x 1.5		2,472	2,299	0,984	2,638	2,406	2,232	100
13639164	M64 x 1.5	G 2-1/4	2,642	2,390	1,142	2,795	2,531	2,323	100
13662104	M70 x 1.5		2,772	2,642	0,748	2,953	2,705	2,575	100
13691854	M75 x 1.5	G 2-1/2	2,980	2,850	0,748	3,268	2,917	2,787	100
13700204		G 3	3,457	3,327	0,748	3,622	3,374	3,244	100





9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

GMP Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Push-In Plug

The GMP Series durable tapered plug provides secure protection for both threaded and non-threaded components. Sealing against contaminants such as dust, moisture and debris is excellent, while the low-profile fit is efficient at preventing accidental removal or snagging. The plug performs well in environments with limited space.

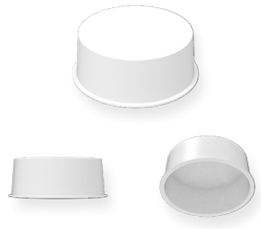

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°C / 150°F

***Can also be used as a cap**

Clear (-**CL**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*Some part dimensions may vary. Please request samples to confirm suitability. *For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm						Packaging
	d	d1	h	D2	D	D1	
	Inside diameter	Inside diameter	Inside height	Flange diameter	Outside diameter	Outside diameter	Carton Quantity
13145811	8,00	7,00	9,60	14,00	9,90	8,50	1.000
13150381	30,00	28,00	18,50	36,20	30,80	29,70	400
13176481	33,20	31,40	17,95	39,50	34,00	33,40	400
13184121	39,10	37,50	19,00	43,00	39,45	39,50	250
13198711	41,00	38,00	20,80	46,20	41,00	40,00	250
13217421	43,10	40,40	18,10	47,20	43,50	42,40	250
13234721	45,50	43,00	21,00	51,50	47,00	45,00	150
13259371	49,10	47,30	20,00	55,20	50,00	49,30	150
13279341	51,50	49,00	20,40	58,50	51,70	51,00	150
13313841	53,20	50,50	15,00	58,50	55,20	53,50	150
13345971	54,30	51,00	20,80	57,70	54,00	53,00	150
13352451	57,00	54,50	14,80	62,50	58,50	57,40	150
13380911	66,00	63,00	21,20	72,20	66,30	66,00	100
13422451	75,00	66,30	23,20	74,00	71,70	68,70	100
13485551	72,00	69,50	23,00	77,20	72,00	71,50	100
13500731	72,50	70,00	14,50	82,50	75,50	74,80	100
13514461	87,50	86,50	11,50	95,50	89,00	88,50	100
13521341	88,00	85,70	18,50	99,50	89,60	89,20	100
13537781	105,50	104,00	11,90	115,00	106,50	106,00	100

Part Number	d	d1	h	D2	D	D1	Carton Quantity
	Inside diameter	Inside diameter	Inside height	Flange diameter	Outside diameter	Outside diameter	
	Dimensions in mm						Packaging

GMP Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*Some part dimensions may vary. Please request samples to confirm suitability. *For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches						Packaging
	d	d1	h	D2	D	D1	
	Inside diameter	Inside diameter	Inside height	Flange diameter	Outside diameter	Outside diameter	Carton Quantity
13145811	0,276	0,378	0,551	0,390	0,335	1.000	1.000
13150381	1,102	0,728	1,425	1,213	1,169	400	400
13176481	1,236	0,707	1,555	1,339	1,315	400	400
13184121	1,476	0,748	1,693	1,553	1,555	250	250
13198711	1,496	0,819	1,819	1,614	1,575	250	250
13217421	1,591	0,713	1,858	1,713	1,669	250	250
13234721	1,693	0,827	2,028	1,850	1,772	150	150
13259371	1,862	0,787	2,173	1,969	1,941	150	150
13279341	1,929	0,803	2,303	2,035	2,008	150	150
13313841	1,988	0,591	2,303	2,173	2,106	150	150
13345971	2,008	0,819	2,272	2,126	2,087	150	150
13352451	2,146	0,583	2,461	2,303	2,260	150	150
13380911	2,480	0,835	2,843	2,610	2,598	100	100
13422451	2,610	0,913	2,913	2,823	2,705	100	100
13485551	2,736	0,906	3,039	2,835	2,815	100	100
13500731	2,756	0,571	3,248	2,972	2,945	100	100
13514461	3,406	0,453	3,760	3,504	3,484	100	100
13521341	3,374	0,728	3,917	3,528	3,512	100	100
13537781	4,094	0,469	4,528	4,193	4,173	100	100

Part Number	d	d1	h	D2	D	D1	Carton Quantity
	Inside diameter	Inside diameter	Inside height	Flange diameter	Outside diameter	Outside diameter	
	Dimensions in inches						Packaging



T Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Dish Plug

The T Series stopper is specially designed to protect threaded ports and boreholes with precision, preventing particle and fluid entry and maintaining component cleanliness. Durable construction withstands mechanical and environmental stresses without loss of integrity and functionality. Easy and efficient insertion and removal avoid thread damage.

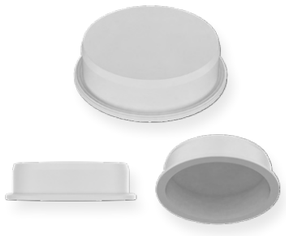



Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°C / 150°F

***Can also be used as a cap**

Clear (-**CL**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Fits threaded hole size			Dimensions in mm				Packaging
	Metric coarse	Metric fine	Imperial	D1 Outside diameter	h Height	D Flange diameter	d Inside diameter	Quantity per bag
13336724	M5			4.25	3.50	8.30	3.00	5000
13109234	M6	M6 x 0.75		5.30	5.00	8.30	3.90	5000
13115714		M6 x 0.7 5, M6 x 0.5		5.70	5.00	8.70	4.10	5000
13129544	M7			6.30	5.00	9.30	5.20	5000
13138114	M8			6.70	5.00	9.70	5.20	5000
13155794		M8 x 1		7.20	6.30	10.20	6.10	5000
13198964		M8 x 0.75		7.70	6.30	10.70	6.10	5000
13212424				8.10	6.30	11.10	7.00	5000
13222764	M10			8.50	6.30	11.50	7.00	5000
13228374	M10	M10 x 1.25, M10 x 1, M10 x 0.75	G 1/8	9.10	6.50	12.90	7.90	5000
13229094	M10	M10 x 1.25, M10 x 1, M10 x 0.75	G 1/8	9.20	10.10	12.90	7.90	5000
13255534	M12	M12 x 1.25, M12 x 1		10.40	6.90	14.30	9.30	5000
13271684	M12	M12 x 1.25, M12 x 1		10.80	6.90	14.70	9.30	5000
13295244		M12 x 1.25, M12 x 1		11.20	6.90	15.20	10.30	5000
13300704		M12 x 1		11.70	6.90	15.70	10.30	5000
13306734			G 1/4	12.10	7.00	15.90	11.00	5000
13314314	M14	M14 x 1.5		12.50	7.00	16.40	11.00	5000
13320854		M14 x 1.25, M14 x 1		13.00	7.70	16.90	11.90	5000
13324694	M16			14.00	7.70	17.80	12.40	5000

9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

caplugs

Visit **www.caplugs.eu** for full product information and build your order with precision and confidence.

Kirsebauer

T Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits threaded hole size			Dimensions in inches				Packaging
	Metric coarse	Metric fine	Imperial	D1 Outside diameter	h Height	D Flange diameter	d Inside diameter	Quantity per bag
13336724	M5			0.167	0.138	0.327	0.118	5000
13109234	M6	M6 x 0.75		0.209	0.197	0.327	0.154	5000
13115714		M6 x 0.7 5, M6 x 0.5		0.224	0.197	0.343	0.161	5000
13129544	M7			0.248	0.197	0.366	0.205	5000
13138114	M8			0.264	0.197	0.382	0.205	5000
13155794		M8 x 1		0.283	0.248	0.402	0.240	5000
13198964		M8 x 0.75		0.303	0.248	0.421	0.240	5000
13212424				0.319	0.248	0.437	0.276	5000
13222764	M10			0.335	0.248	0.453	0.276	5000
13228374	M10	M10 x 1.25, M10 x 1, M10 x 0.75	G 1/8	0.358	0.256	0.508	0.311	5000
13229094	M10	M10 x 1.25, M10 x 1, M10 x 0.75	G 1/8	0.362	0.398	0.508	0.311	5000
13255534	M12	M12 x 1.25, M12 x 1		0.409	0.272	0.563	0.366	5000
13271684	M12	M12 x 1.25, M12 x 1		0.425	0.272	0.579	0.366	5000
13295244		M12 x 1.25, M12 x 1		0.441	0.272	0.598	0.406	5000
13300704		M12 x 1		0.461	0.272	0.618	0.406	5000
13306734			G 1/4	0.476	0.276	0.626	0.433	5000
13314314	M14	M14 x 1.5		0.492	0.276	0.646	0.433	5000
13320854		M14 x 1.25, M14 x 1		0.512	0.303	0.665	0.469	5000
13324694	M16			0.551	0.303	0.701	0.488	5000





9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

caplugs

Our engineering experts are ready to help you with fully customised solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

Kirsebauer

T Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits threaded hole size			Dimensions in mm				Packaging
	Metric coarse	Metric fine	Imperial	D1 Outside diameter	h Height	D Flange diameter	d Inside diameter	Quantity per bag
13340384	M16			14.50	7.50	18.40	13.30	5000
13347634		M16 x 1.5, M16 x 1		15.00	7.50	19.00	13.30	5000
13371474		M16 x 1.5, M16 x 1	G 3/8	15.30	11.00	19.30	13.80	1000
13377854	M18	M16 x 1	G 3/8	15.30	11.00	25.50	13.80	1000
13382164	M18	M16 x 1	G 3/8	15.50	7.70	19.10	14.40	5000
13398004	M18	M18 x 2		16.00	7.70	19.60	14.90	5000
13399524		M18 x 1.5		16.50	7.70	19.70	14.90	5000
13408224				17.10	7.70	20.90	16.10	1000
13408524	M20	M18 x 1, M20 x 2		17.80	7.70	21.40	16.70	1000
13418174	M20	M20 x 1. 5, M20 x 2		18.20	7.70	21.80	16.70	1000
13434644		M20 x 1.5	G 1/2	19.00	11.00	29.70	17.80	1000
13437284	M22	M20 x 1.5, M20 x 1, M22 x 2	G 1/2	19.60	8.30	23.30	18.50	1000
13446784	M22	M20 x 1.5, M20 x 1, M22 x 2	G 1/2	19.60	5.00	23.30	18.50	2500
13459984	M22	M22 x 2, M22 x 1.5		20.70	8.50	24.70	19.60	1000
13476114	M24	M22 x 1.5, M22 x 1	G 5/8	21.70	8.50	25.70	20.60	1000
13479024		M24 x 2		22.30	8.50	26.20	20.60	1000
13482134	M27		G 3/4	24.50	8.50	28.20	23.40	1000
13482294	M27	M27 x 2	G 3/4	25.10	8.50	28.80	23.90	1000
13483264		M27 x 1.5		26.00	8.50	30.00	24.70	1000
13486924		M28 x 1.5		26.60	8.50	30.60	24.70	1000
13489534	M30			27.20	8.50	31.20	26.00	1000
13499144	M30	M30 x 3		27.70	8.50	31.60	26.00	1000
13500894		M30 x 2, M30 x 1	G 7/8	28.90	8.50	32.80	27.80	1000
13508964	M33			30.00	8.50	34.00	28.80	1000
13557374	M33	M33 x 2	G 1	31.10	8.50	35.00	29.90	1000
13572324		M33 x 2	G 1	31.40	8.50	35.50	30.20	1000
13583534	M36	M33 x 1.5	G 1	31.80	8.50	35.80	30.20	1000
13588554	M36			33.20	8.50	37.20	31.70	500
13590324	M39	M39 x 3	G 1-1/8	36.00	8.50	40.20	34.40	500
13595294	M42	M42 x 4, M42 x 3		39.10	8.50	43.10	37.50	500
13600974		M42 x 3	G 1-1/4	39.50	8.80	46.20	38.00	500
13604364	M45	M42 x 1.5, M42 x 2	G 1-1/4	40.10	8.60	46.80	38.90	500
13610624	M45	M42 x 2, M42 x 1.5	G 1-1/4	40.70	8.70	47.50	39.10	500



9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

Visit **www.caplugs.eu** for full product information and build your order with precision and confidence.

T Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits threaded hole size			Dimensions in inches				Packaging
	Metric coarse	Metric fine	Imperial	D1 Outside diameter	h Height	D Flange diameter	d Inside diameter	Quantity per bag
13340384	M16			0.571	0.295	0.724	0.524	5000
13347634		M16 x 1.5, M16 x 1		0.591	0.295	0.748	0.524	5000
13371474		M16 x 1.5, M16 x 1	G 3/8	0.602	0.433	0.760	0.543	1000
13377854	M18	M16 x 1	G 3/8	0.602	0.433	1.004	0.543	1000
13382164	M18	M16 x 1	G 3/8	0.610	0.303	0.752	0.567	5000
13398004	M18	M18 x 2		0.630	0.303	0.772	0.587	5000
13399524		M18 x 1.5		0.650	0.303	0.776	0.587	5000
13408224				0.673	0.303	0.823	0.634	1000
13408524	M20	M18 x 1, M20 x 2		0.701	0.303	0.843	0.657	1000
13418174	M20	M20 x 1. 5, M20 x 2		0.717	0.303	0.858	0.657	1000
13434644		M20 x 1.5	G 1/2	0.748	0.433	1.169	0.701	1000
13437284	M22	M20 x 1.5, M20 x 1, M22 x 2	G 1/2	0.772	0.327	0.917	0.728	1000
13446784	M22	M20 x 1.5, M20 x 1, M22 x 2	G 1/2	0.772	0.197	0.917	0.728	2500
13459984	M22	M22 x 2, M22 x 1.5		0.815	0.335	0.972	0.772	1000
13476114	M24	M22 x 1.5, M22 x 1	G 5/8	0.854	0.335	1.012	0.811	1000
13479024		M24 x 2		0.878	0.335	1.031	0.811	1000
13482134	M27		G 3/4	0.965	0.335	1.110	0.921	1000
13482294	M27	M27 x 2	G 3/4	0.988	0.335	1.134	0.941	1000
13483264		M27 x 1.5		1.024	0.335	1.181	0.972	1000
13486924		M28 x 1.5		1.047	0.335	1.205	0.972	1000
13489534	M30			1.071	0.335	1.228	1.024	1000
13499144	M30	M30 x 3		1.091	0.335	1.244	1.024	1000
13500894		M30 x 2, M30 x 1	G 7/8	1.138	0.335	1.291	1.094	1000
13508964	M33			1.181	0.335	1.339	1.134	1000
13557374	M33	M33 x 2	G 1	1.224	0.335	1.378	1.177	1000
13572324		M33 x 2	G 1	1.236	0.335	1.398	1.189	1000
13583534	M36	M33 x 1.5	G 1	1.252	0.335	1.409	1.189	1000
13588554	M36			1.307	0.335	1.465	1.248	500
13590324	M39	M39 x 3	G 1-1/8	1.417	0.335	1.583	1.354	500
13595294	M42	M42 x 4, M42 x 3		1.539	0.335	1.697	1.476	500
13600974		M42 x 3	G 1-1/4	1.555	0.346	1.819	1.496	500
13604364	M45	M42 x 1.5, M42 x 2	G 1-1/4	1.579	0.339	1.843	1.531	500
13610624	M45	M42 x 2, M42 x 1.5	G 1-1/4	1.602	0.343	1.870	1.539	500



9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

Our engineering experts are ready to help you with fully customised solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

T Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits threaded hole size			Dimensions in mm				Packaging
	Metric coarse	Metric fine	Imperial	D1 Outside diameter	h Height	D Flange diameter	d Inside diameter	Quantity per bag
13637484	M48	M45 x 3	G 1-3/8	42.60	4.00	46.40	41.40	500
13640804				43.00	8.50	47.20	41.70	500
13645244		M48 x 2, M48 x 3, M48 x 4	G 1-1/2	46.10	8.50	52.70	44.50	500
13674764	M52	M48 x 1.5	G 1-1/2	46.60	5.80	50.30	45.10	500
13685474	M56	M52 x 2, M52 x 1.5		51.10	8.70	60.00	49.50	500
13699254		M58 x 1.5	G 2	58.20	8.70	67.00	56.50	500
13711524		M64 x 4		60.00	10.20	61.70	58.80	500
13727464		M68 x 3, M68 x 2		66.20	8.70	75.20	64.60	250
13731164		M75 x 2, M75 x 1.5, M76 x 4	G 2-1/2	73.60	8.70	82.50	71.80	250
13766764		M85 x 4	G 2-3/4	81.20	8.70	90.20	79.40	250
13787354		M90 x 6		85.10	8.70	93.80	83.20	250
13794414		M90 x 4	G 3	86.60	9.00	98.60	84.60	250
13797594		M105 x 4		101.80	9.00	113.80	99.50	250



9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

T Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits threaded hole size			Dimensions in inches				Packaging
	Metric coarse	Metric fine	Imperial	D1 Outside diameter	h Height	D Flange diameter	d Inside diameter	Quantity per bag
13637484	M48	M45 x 3	G 1-3/8	1.677	0.157	1.827	1.630	500
13640804				1.693	0.335	1.858	1.642	500
13645244		M48 x 2, M48 x 3, M48 x 4	G 1-1/2	1.815	0.335	2.075	1.752	500
13674764	M52	M48 x 1.5	G 1-1/2	1.835	0.228	1.980	1.776	500
13685474	M56	M52 x 2, M52 x 1.5		2.012	0.343	2.362	1.949	500
13699254		M58 x 1.5	G 2	2.291	0.343	2.638	2.224	500
13711524		M64 x 4		2.362	0.402	2.429	2.315	500
13727464		M68 x 3, M68 x 2		2.606	0.343	2.961	2.543	250
13731164		M75 x 2, M75 x 1.5, M76 x 4	G 2-1/2	2.898	0.343	3.248	2.827	250
13766764		M85 x 4	G 2-3/4	3.197	0.343	3.551	3.126	250
13787354		M90 x 6		3.350	0.343	3.693	3.276	250
13794414		M90 x 4	G 3	3.409	0.354	3.882	3.331	250
13797594		M105 x 4		4.008	0.354	4.480	3.917	250



9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

Threaded Plugs

When High Pressure Containment is Critical

Caplugs threaded plugs enable reliable fluid and gas containment by guarding openings where secure sealing is imperative. Their precision-engineered threads provide the reliable leak-proof fit that pressurised systems demand.

Easy installation and removal are made possible by design and are essential to efficiency in environments requiring regular system checks or fluid changes. This ease of handling is particularly valuable for industrial machinery maintenance, where routine accessibility is a requirement.

Robust construction resists harsh operational conditions without loss of sealing function, ensuring long-term reliability and performance. As a result, these plugs safeguard critical processes for sustained efficiency and safety in automotive manufacturing and the chemical, oil and gas industries.

More details about these products on our website

TPY Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Reliable Hex Threaded Plug

The TPY Series plug seals robustly against contaminants and protects from damage, maintaining thread integrity to extend reliability. Durable under dynamic stresses, including vibration and fluctuating pressures, the plug withstands chemical exposure and temperature changes. Built-in adaptability reduces the need for multiple sealing solutions.

Material: Polyamide 6.6 (PA6.6)
Temperature Resistance: 149°**C** / 300°**F**

***Also available in a series made from reinforced material**

Yellow (-**YL**)
RAL 1021

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm					Packaging
	TH	D	H1	H	SW	
	Thread size	Flange diameter	Height	Overall height	Distance across flats	Carton quantity
19108561	M5 x 0.8	10.20	8.00	13.80	8.00	500
19113041	M6 x 0.75	12.00	7.00	12.50	10.00	500
19113421	M6 x 1	11.70	7.40	12.50	10.00	500
19117041	M8 x 1	10.75	7.30	13.00	8.00	500
19118881	M8 x 1.25	16.70	8.75	16.35	12.00	200
19123681	M10 x 1	16.40	8.40	15.90	13.00	200
19126051	M10 x 1	20.72	8.42	16.20	17.00	200
19128631	M10 x 1.25	20.70	8.50	16.30	13.00	250
19136021	M10 x 1.5	16.40	8.50	16.00	13.00	200
19164211	M12 x 1	21.00	8.15	16.00	17.00	250
19168041	M12 x 1.5	20.80	9.87	17.60	17.00	250
19174081	M12 x 1.5	20.80	11.50	19.20	17.00	250
19175901	M12 x 1.75	20.85	8.55	16.15	17.00	250
19176841	M14 x 1.5	20.80	8.53	16.35	17.00	250
19186301	M14 x 1.5	20.90	11.30	19.10	17.00	250
19187931	M14 x 2	22.12	11.58	19.10	17.00	200
19194711	M16 x 1.5	20.80	8.80	16.60	17.00	250
19196451	M16 x 1.5	22.86	8.77	16.45	17.00	200
19196481	M16 x 1.5	22.87	11.30	18.70	17.00	500
19205371	M16 x 1.5	31.95	8.50	15.90	17.00	500
19219521	M16 x 2	23.30	8.90	16.80	17.00	200

TPY Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches					Packaging
	TH	D	H1	H	SW	
	Thread size	Flange diameter	Height	Overall height	Distance across flats	Carton quantity
19108561	M5 × 0.8	0.402	0.315	0.543	0.315	500
19113041	M6 × 0.75	0.472	0.276	0.492	0.394	500
19113421	M6 × 1	0.461	0.291	0.492	0.394	500
19117041	M8 × 1	0.423	0.287	0.512	0.315	500
19118881	M8 × 1.25	0.657	0.344	0.644	0.472	200
19123681	M10 × 1	0.646	0.331	0.626	0.512	200
19126051	M10 × 1	0.816	0.331	0.638	0.669	200
19128631	M10 × 1.25	0.815	0.335	0.642	0.512	250
19136021	M10 × 1.5	0.646	0.335	0.630	0.512	200
19164211	M12 × 1	0.827	0.321	0.630	0.669	250
19168041	M12 × 1.5	0.819	0.389	0.693	0.669	250
19174081	M12 × 1.5	0.819	0.453	0.756	0.669	250
19175901	M12 × 1.75	0.821	0.337	0.636	0.669	250
19176841	M14 × 1.5	0.819	0.336	0.644	0.669	250
19186301	M14 × 1.5	0.823	0.445	0.752	0.669	250
19187931	M14 × 2	0.871	0.456	0.752	0.669	200
19194711	M16 × 1.5	0.819	0.346	0.654	0.669	250
19196451	M16 × 1.5	0.900	0.345	0.648	0.669	200
19196481	M16 × 1.5	0.900	0.445	0.736	0.669	500
19205371	M16 × 1.5	1.258	0.335	0.626	0.669	500
19219521	M16 × 2	0.917	0.350	0.661	0.669	200

TPY Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88





*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm					Packaging
	TH	D	H1	H	SW	
	Thread size	Flange diameter	Height	Overall height	Distance across flats	Carton quantity
19229331	M18 x 1.5	28.70	8.40	15.90	22.00	500
19230681	M18 x 1.5	28.10	11.16	19.00	22.00	500
19237401	M20 x 1.5	27.40	8.56	16.30	22.00	500
19258331	M20 x 1.5	27.50	13.65	21.40	22.00	500
19265161	M20 x 2.5	27.45	8.45	16.25	22.00	500
19269401	M22 x 1.5	28.50	8.48	16.13	22.00	250
19271701	M22 x 1.5	28.55	11.35	19.00	22.00	250
19303711	M22 x 1.5	31.80	11.68	19.70	22.00	250
19305311	M24 x 1.5	32.00	11.50	19.50	22.00	250
19307711	M25 x 1.5	34.90	15.00	23.00	27.00	250
19313071	M26 x 1.5	35.32	11.83	19.65	27.00	250
19313821	M27 x 2	34.80	11.63	22.45	27.00	250
19319001	M30 x 2	38.35	11.54	22.54	27.00	250
19320831	M33 x 2	38.84	11.50	22.50	27.00	250
19338161	M42 x 2	52.90	12.17	21.87	36.00	100
19338881	M48 x 2	56.12	15.45	25.25	36.00	100
19351911	M48 x 2	59.90	15.00	25.20	36.00	100
19356801	R 1/8"	17.00	8.50	16.00	12.00	200
19358981	R 1/4"	20.85	8.50	16.00	17.00	250
19371281	R 1/4"	23.11	8.50	16.00	17.00	250
19389271	R 3/8"	20.86	8.00	15.17	17.00	250
19389581	R 3/8"	24.88	8.20	15.70	17.00	200
19397581	R 3/8"	28.56	8.00	15.80	22.00	500
19401211	R 3/8"	31.70	8.30	16.00	22.00	500
19402071	R 1/2"	28.70	8.50	16.20	22.00	500
19423471	R 1/2"	31.50	8.30	16.20	22.00	500
19432501	R 5/8"	28.80	8.50	16.50	22.00	500
19440911	R 3/4-14	35.35	12.00	23.00	27.00	250
19442541	R 1"	38.50	11.70	19.30	32.00	250
19446581	R 1"	44.50	11.70	21.60	32.00	250
19451161	R 1-1/4"	53.35	12.45	22.20	36.00	200
19452481	R 1-1/2"	60.00	15.00	25.00	36.00	150
19456251	7/16-20 UNF	20.85	8.50	16.00	17.00	250
19459281	7/16-20 UNF	20.85	11.50	19.40	17.00	250
19459721	7/16-20 UNF	24.70	8.45	16.12	17.00	200
19468121	1/2-20 UNF	16.80	11.45	19.15	12.00	250
19468481	9/16-18 UNF	21.05	8.50	16.40	17.00	250

TPY Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88





*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches					Packaging
	TH	D	H1	H	SW	
	Thread size	Flange diameter	Height	Overall height	Distance across flats	Carton quantity
19229331	M18 x 1.5	1.130	0.331	0.626	0.866	500
19230681	M18 x 1.5	1.106	0.439	0.748	0.866	500
19237401	M20 x 1.5	1.079	0.337	0.642	0.866	500
19258331	M20 x 1.5	1.083	0.537	0.843	0.866	500
19265161	M20 x 2.5	1.081	0.333	0.640	0.866	500
19269401	M22 x 1.5	1.122	0.334	0.635	0.866	250
19271701	M22 x 1.5	1.124	0.447	0.748	0.866	250
19303711	M22 x 1.5	1.252	0.460	0.776	0.866	250
19305311	M24 x 1.5	1.260	0.453	0.768	0.866	250
19307711	M25 x 1.5	1.374	0.591	0.906	1.063	250
19313071	M26 x 1.5	1.391	0.466	0.774	1.063	250
19313821	M27 x 2	1.370	0.458	0.884	1.063	250
19319001	M30 x 2	1.510	0.454	0.887	1.063	250
19320831	M33 x 2	1.529	0.453	0.886	1.063	250
19338161	M42 x 2	2.083	0.479	0.861	1.417	100
19338881	M48 x 2	2.209	0.608	0.994	1.417	100
19351911	M48 x 2	2.358	0.591	0.992	1.417	100
19356801	R 1/8"	0.669	0.335	0.630	0.472	200
19358981	R 1/4"	0.821	0.335	0.630	0.669	250
19371281	R 1/4"	0.910	0.335	0.630	0.669	250
19389271	R 3/8"	0.821	0.315	0.597	0.669	250
19389581	R 3/8"	0.980	0.323	0.618	0.669	200
19397581	R 3/8"	1.124	0.315	0.622	0.866	500
19401211	R 3/8"	1.248	0.327	0.630	0.866	500
19402071	R 1/2"	1.130	0.335	0.638	0.866	500
19423471	R 1/2"	1.240	0.327	0.638	0.866	500
19432501	R 5/8"	1.134	0.335	0.650	0.866	500
19440911	R 3/4-14	1.392	0.472	0.906	1.063	250
19442541	R 1"	1.516	0.461	0.760	1.260	250
19446581	R 1"	1.752	0.461	0.850	1.260	250
19451161	R 1-1/4"	2.100	0.490	0.874	1.417	200
19452481	R 1-1/2"	2.362	0.591	0.984	1.417	150
19456251	7/16-20 UNF	0.821	0.335	0.630	0.669	250
19459281	7/16-20 UNF	0.821	0.453	0.764	0.669	250
19459721	7/16-20 UNF	0.972	0.333	0.635	0.669	200
19468121	1/2-20 UNF	0.661	0.451	0.754	0.472	250
19468481	9/16-18 UNF	0.829	0.335	0.646	0.669	250

TPY Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm					Packaging
	TH	D	H1	H	SW	
	Thread size	Flange diameter	Height	Overall height	Distance across flats	Carton quantity
19481531	9/16-18 UNF	21.05	11.50	19.22	17.00	250
19482081	9/16-18 UNF	24.10	11.30	19.00	17.00	200
19503271	5/8-18 UNF	20.90	8.50	16.30	17.00	250
19519761	3/4-16 UNF	28.50	10.60	18.20	22.00	500
19532381	3/4-16 UNF	32.40	10.60	18.00	22.00	500
19570501	7/8-14 UNF	28.80	12.00	19.70	22.00	500
19591751	7/8-14 UNF	31.80	12.56	20.00	22.00	500
19596861	1 1/16-12 UNF	31.50	11.30	18.90	27.00	100
19599291	1 1/16-12 UNF	35.30	11.60	19.40	27.00	100
19607341	1 1/16-12 UNF	37.85	11.40	19.40	27.00	250
19620981	1 3/16-12 UNF	38.80	11.50	22.78	27.00	250
19624941	1 3/16-12 UNF	38.80	15.80	26.90	27.00	250
19636301	1 5/16-12 UNF	44.00	11.50	21.40	32.00	200
19637311	1 7/16-12 UNF	53.80	11.70	21.70	36.00	200
19644441	1 5/8-12 UNF	52.90	12.65	22.35	36.00	200
19647001	1 7/8-12 UNF	62.30	15.33	24.78	40.40	100
19647781	1-8 UNC	45.50	11.70	19.30	32.00	1000





Part Number	TH	D	H1	H	SW	Carton quantity
	Thread size	Flange diameter	Height	Overall height	Distance across flats	
	Dimensions in mm					Packaging

TPY Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches					Packaging
	TH	D	H1	H	SW	
	Thread size	Flange diameter	Height	Overall height	Distance across flats	Carton quantity
19481531	9/16-18 UNF	0.829	0.453	0.757	0.669	250
19482081	9/16-18 UNF	0.949	0.445	0.748	0.669	200
19503271	5/8-18 UNF	0.823	0.335	0.642	0.669	250
19519761	3/4-16 UNF	1.122	0.417	0.717	0.866	500
19532381	3/4-16 UNF	1.276	0.417	0.709	0.866	500
19570501	7/8-14 UNF	1.134	0.472	0.776	0.866	500
19591751	7/8-14 UNF	1.252	0.494	0.787	0.866	500
19596861	1-1/16-12 UNF	1.240	0.445	0.744	1.063	100
19599291	1-1/16-12 UNF	1.390	0.457	0.764	1.063	100
19607341	1-1/16-12 UNF	1.490	0.449	0.764	1.063	250
19620981	1-3/16-12 UNF	1.528	0.453	0.897	1.063	250
19624941	1-3/16-12 UNF	1.528	0.622	1.059	1.063	250
19636301	1-5/16-12 UNF	1.732	0.453	0.843	1.260	200
19637311	1-7/16-12 UNF	2.118	0.461	0.854	1.417	200
19644441	1-5/8-12 UNF	2.083	0.498	0.880	1.417	200
19647001	1-7/8-12 UNF	2.453	0.604	0.976	1.591	100
19647781	1-8 UNC	1.791	0.461	0.760	1.260	1000





Part Number	TH	D	H1	H	SW	Carton quantity
	Thread size	Flange diameter	Height	Overall height	Distance across flats	
	Dimensions in inches					Packaging

TPF Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Reinforced Threaded Plug

The TPF Series plug fits with component internal geometry, creating a durable, effective seal against contaminants. Leakage is prevented, maintaining fluid handling system pressure and operational safety. Efficient installation and removal are achieved with standard tools, while resistance to harsh chemicals and extreme temperatures is built in.

Material: Glass Fibre Reinforced Polyamide (PA GF)
Temperature Resistance: 200°**C** / 392°**F**

***Also available in a series that includes a gasket**

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm					Packaging
	TH	D	H1	H	SW	Carton quantity
	Thread size	Flange diameter	Height	Overall height	Distance across flats	
19109001	M5 x 0.8	10.20	8.00	13.80	8.00	500
19109311	M6 x 0.75	12.00	7.00	12.50	10.00	500
19121441	M6 x 1	11.70	7.40	12.50	10.00	500
19129791	M8 x 1	10.75	7.30	13.00	8.00	500
19134741	M8 x 1.25	16.70	8.75	16.35	12.00	200
19146601	M10 x 1	16.40	8.40	15.90	13.00	200
19152001	M10 x 1	20.72	8.42	16.20	17.00	200
19157171	M10 x 1.25	20.70	8.50	16.30	13.00	250
19166331	M10 x 1.5	16.40	8.50	16.00	13.00	200
19203361	M12 x 1	21.00	8.15	16.00	17.00	250
19224471	M12 x 1.5	20.80	9.87	17.60	17.00	250
19225621	M12 x 1.5	20.80	11.50	19.20	17.00	250
19235841	M12 x 1.75	20.85	8.55	16.15	17.00	250
19243221	M14 x 1.5	20.80	8.53	16.35	17.00	250
19244971	M14 x 1.5	20.90	11.30	19.10	17.00	250
19255721	M14 x 2	22.12	11.58	19.10	17.00	200
19260361	M16 x 1.5	20.80	8.80	16.60	17.00	250
19279921	M16 x 1.5	22.86	8.77	16.45	17.00	200
19288251	M16 x 1.5	22.87	11.30	18.70	17.00	500
19288331	M16 x 1.5	31.95	8.50	15.90	17.00	500
19302701	M16 x 2	23.30	8.90	16.80	17.00	200
19326081	M18 x 1.5	28.70	8.40	15.90	22.00	500

TPF Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches					Packaging
	TH	D	H1	H	SW	Carton quantity
	Thread size	Flange diameter	Height	Overall height	Distance across flats	
19109001	M5 x 0.8	0.402	0.315	0.543	0.315	500
19109311	M6 x 0.75	0.472	0.276	0.492	0.394	500
19121441	M6 x 1	0.461	0.291	0.492	0.394	500
19129791	M8 x 1	0.423	0.287	0.512	0.315	500
19134741	M8 x 1.25	0.657	0.344	0.644	0.472	200
19146601	M10 x 1	0.646	0.331	0.626	0.512	200
19152001	M10 x 1	0.816	0.331	0.638	0.669	200
19157171	M10 x 1.25	0.815	0.335	0.642	0.512	250
19166331	M10 x 1.5	0.646	0.335	0.630	0.512	200
19203361	M12 x 1	0.827	0.321	0.630	0.669	250
19224471	M12 x 1.5	0.819	0.389	0.693	0.669	250
19225621	M12 x 1.5	0.819	0.453	0.756	0.669	250
19235841	M12 x 1.75	0.821	0.337	0.636	0.669	250
19243221	M14 x 1.5	0.819	0.336	0.644	0.669	250
19244971	M14 x 1.5	0.823	0.445	0.752	0.669	250
19255721	M14 x 2	0.871	0.456	0.752	0.669	200
19260361	M16 x 1.5	0.819	0.346	0.654	0.669	250
19279921	M16 x 1.5	0.900	0.345	0.648	0.669	200
19288251	M16 x 1.5	0.900	0.445	0.736	0.669	500
19288331	M16 x 1.5	1.258	0.335	0.626	0.669	500
19302701	M16 x 2	0.917	0.350	0.661	0.669	200
19326081	M18 x 1.5	1.130	0.331	0.626	0.866	500

TPF Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm					Packaging
	TH	D	H1	H	SW	
	Thread size	Flange diameter	Height	Overall height	Distance across flats	Carton quantity
19338591	M18 x 1.5	28.10	11.16	19.00	22.00	500
19341171	M20 x 1.5	27.40	8.56	16.30	22.00	500
19341751	M20 x 1.5	27.50	13.65	21.40	22.00	500
19344301	M20 x 2.5	27.45	8.45	16.25	22.00	500
19353041	M22 x 1.5	28.50	8.48	16.13	22.00	250
19354091	M22 x 1.5	28.55	11.35	19.00	22.00	250
19361701	M22 x 1.5	31.80	11.68	19.70	22.00	250
19380111	M24 x 1.5	32.00	11.50	19.50	22.00	250
19385121	M25 x 1.5	34.90	15.00	23.00	27.00	250
19389361	M26 x 1.5	35.32	11.83	19.65	27.00	250
19396361	M27 x 2	34.80	11.63	22.45	27.00	250
19403261	M30 x 2	38.35	11.54	22.54	27.00	250
19414931	M33 x 2	38.84	11.50	22.50	27.00	250
19418211	M42 x 2	52.90	12.17	21.87	36.00	100
19421691	M48 x 2	56.12	15.45	25.25	36.00	100
19434691	M48 x 2	59.90	15.00	25.20	36.00	100
19461621	R 1/8"	17.00	8.50	16.00	12.00	200
19464781	R 1/4"	20.85	8.50	16.00	17.00	250
19468361	R 1/4"	23.11	8.50	16.00	17.00	250
19477271	R 3/8"	20.86	8.00	15.17	17.00	250
19492251	R 3/8"	24.88	8.20	15.70	17.00	200
19502941	R 3/8"	28.56	8.00	15.80	22.00	500
19541411	R 3/8"	31.70	8.30	16.00	22.00	500
19543221	R 1/2"	28.70	8.50	16.20	22.00	500
19544081	R 1/2"	31.50	8.30	16.20	22.00	500
19546261	R 5/8"	28.80	8.50	16.50	22.00	500
19556731	R 3/4-14	35.35	12.00	23.00	27.00	250
19592261	R 1"	38.50	11.70	19.30	32.00	250
19592671	R 1"	44.50	11.70	21.60	32.00	250
19609171	R 1-1/4"	53.35	12.45	22.20	36.00	200
19615881	R 1-1/2"	60.00	15.00	25.00	36.00	150
19617041	7/16-20 UNF	20.85	8.50	16.00	17.00	250
19618921	7/16-20 UNF	20.85	11.50	19.40	17.00	250
19627561	7/16-20 UNF	24.70	8.45	16.12	17.00	200
19629991	1/2-20 UNF	16.80	11.45	19.15	12.00	250
19641621	9/16-18 UNF	21.05	8.50	16.40	17.00	250
19646891	9/16-18 UNF	21.05	11.50	19.22	17.00	250





caplugs

Visit **www.caplugs.eu** for full product information and build your order with precision and confidence.

POLYKAP

TPF Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches					Packaging
	TH	D	H1	H	SW	
	Thread size	Flange diameter	Height	Overall height	Distance across flats	Carton quantity
19338591	M18 x 1.5	1.106	0.439	0.748	0.866	500
19341171	M20 x 1.5	1.079	0.337	0.642	0.866	500
19341751	M20 x 1.5	1.083	0.537	0.843	0.866	500
19344301	M20 x 2.5	1.081	0.333	0.640	0.866	500
19353041	M22 x 1.5	1.122	0.334	0.635	0.866	250
19354091	M22 x 1.5	1.124	0.447	0.748	0.866	250
19361701	M22 x 1.5	1.252	0.460	0.776	0.866	250
19380111	M24 x 1.5	1.260	0.453	0.768	0.866	250
19385121	M25 x 1.5	1.374	0.591	0.906	1.063	250
19389361	M26 x 1.5	1.391	0.466	0.774	1.063	250
19396361	M27 x 2	1.370	0.458	0.884	1.063	250
19403261	M30 x 2	1.510	0.454	0.887	1.063	250
19414931	M33 x 2	1.529	0.453	0.886	1.063	250
19418211	M42 x 2	2.083	0.479	0.861	1.417	100
19421691	M48 x 2	2.209	0.608	0.994	1.417	100
19434691	M48 x 2	2.358	0.591	0.992	1.417	100
19461621	R 1/8"	0.669	0.335	0.630	0.472	200
19464781	R 1/4"	0.821	0.335	0.630	0.669	250
19468361	R 1/4"	0.910	0.335	0.630	0.669	250
19477271	R 3/8"	0.821	0.315	0.597	0.669	250
19492251	R 3/8"	0.980	0.323	0.618	0.669	200
19502941	R 3/8"	1.124	0.315	0.622	0.866	500
19541411	R 3/8"	1.248	0.327	0.630	0.866	500
19543221	R 1/2"	1.130	0.335	0.638	0.866	500
19544081	R 1/2"	1.240	0.327	0.638	0.866	500
19546261	R 5/8"	1.134	0.335	0.650	0.866	500
19556731	R 3/4-14	1.392	0.472	0.906	1.063	250
19592261	R 1"	1.516	0.461	0.760	1.260	250
19592671	R 1"	1.752	0.461	0.850	1.260	250
19609171	R 1-1/4"	2.100	0.490	0.874	1.417	200
19615881	R 1-1/2"	2.362	0.591	0.984	1.417	150
19617041	7/16-20 UNF	0.821	0.335	0.630	0.669	250
19618921	7/16-20 UNF	0.821	0.453	0.764	0.669	250
19627561	7/16-20 UNF	0.972	0.333	0.635	0.669	200
19629991	1/2-20 UNF	0.661	0.451	0.754	0.472	250
19641621	9/16-18 UNF	0.829	0.335	0.646	0.669	250
19646891	9/16-18 UNF	0.829	0.453	0.757	0.669	250





caplugs

Our engineering experts are ready to help you with fully customised solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

POLYKAP

TPF Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm					Packaging
	TH	D	H1	H	SW	
	Thread size	Flange diameter	Height	Overall height	Distance across flats	Carton quantity
19654071	9/16-18 UNF	24.10	11.30	19.00	17.00	200
19662531	5/8-18 UNF	20.90	8.50	16.30	17.00	250
19667441	3/4-16 UNF	28.50	10.60	18.20	22.00	500
19677631	3/4-16 UNF	32.40	10.60	18.00	22.00	500
19683341	7/8-14 UNF	28.80	12.00	19.70	22.00	500
19689061	7/8-14 UNF	31.80	12.56	20.00	22.00	500
19713331	1 1/16-12 UNF	31.50	11.30	18.90	27.00	100
19721361	1 1/16-12 UNF	35.30	11.60	19.40	27.00	100
19736031	1 1/16-12 UNF	37.85	11.40	19.40	27.00	250
19756501	1 3/16-12 UNF	38.80	11.50	22.78	27.00	250
19775641	1 3/16-12 UNF	38.80	15.80	26.90	27.00	250
19786631	1 5/16-12 UNF	44.00	11.50	21.40	32.00	200
19790591	1 7/16-12 UNF	53.80	11.70	21.70	36.00	200
19797911	1 5/8-12 UNF	52.90	12.65	22.35	36.00	200
19801901	1 7/8-12 UNF	62.30	15.33	24.78	40.40	100
19803281	1-8 UNC	45.50	11.70	19.30	32.00	1000
Part Number	TH	D	H1	H	SW	Carton quantity
	Thread size	Flange diameter	Height	Overall height	Distance across flats	
	Dimensions in mm					Packaging





TPF Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches					Packaging
	TH	D	H1	H	SW	
	Thread size	Flange diameter	Height	Overall height	Distance across flats	Carton quantity
19654071	9/16-18 UNF	0.949	0.445	0.748	0.669	200
19662531	5/8-18 UNF	0.823	0.335	0.642	0.669	250
19667441	3/4-16 UNF	1.122	0.417	0.717	0.866	500
19677631	3/4-16 UNF	1.276	0.417	0.709	0.866	500
19683341	7/8-14 UNF	1.134	0.472	0.776	0.866	500
19689061	7/8-14 UNF	1.252	0.494	0.787	0.866	500
19713331	1-1/16-12 UNF	1.240	0.445	0.744	1.063	100
19721361	1-1/16-12 UNF	1.390	0.457	0.764	1.063	100
19736031	1-1/16-12 UNF	1.490	0.449	0.764	1.063	250
19756501	1-3/16-12 UNF	1.528	0.453	0.897	1.063	250
19775641	1-3/16-12 UNF	1.528	0.622	1.059	1.063	250
19786631	1-5/16-12 UNF	1.732	0.453	0.843	1.260	200
19790591	1-7/16-12 UNF	2.118	0.461	0.854	1.417	200
19797911	1-5/8-12 UNF	2.083	0.498	0.880	1.417	200
19801901	1-7/8-12 UNF	2.453	0.604	0.976	1.591	100
19803281	1-8 UNC	1.791	0.461	0.760	1.260	1000
Part Number	TH	D	H1	H	SW	Carton quantity
	Thread size	Flange diameter	Height	Overall height	Distance across flats	
	Dimensions in inches					Packaging





TPM Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Enhanced Performance Threaded Plug with Gasket

The TPM Series plug has a specialised sealing mechanism, for enhanced leakage prevention where seal integrity is critical to safe functionality. The barrier excludes solid particles and fluids while highly durable construction maximises working life. Operator-friendly hexagonal design makes application or removal easy without specialist tools.

Material: Polyamide 6.6 (PA6.6)
Gasket: Thermoplastic Elastomer (TPE)
Temperature Resistance: 149°**C** / 300°**F**

***This series includes a gasket**

Clear (-**CL**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm						Packaging
	TH	D	H1	H2	H	SW	
	Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	Carton quantity
19119631	M5 x 0.8	10.20	8.00	1.00	13.80	8.00	500
19126951	M6 x 0.75	12.00	7.00	1.00	12.50	10.00	500
19165411	M6 x 1	11.70	7.40	1.00	12.50	10.00	500
19165821	M8 x 1	10.75	7.30	1.00	13.00	8.00	500
19168331	M8 x 1.25	16.70	8.75	1.00	16.35	12.00	200
19169331	M10 x 1	16.40	8.40	2.00	15.90	13.00	200
19178831	M10 x 1	20.72	8.42	2.00	16.20	17.00	200
19184851	M10 x 1.25	20.70	8.50	2.00	16.30	13.00	250
19193631	M10 x 1.5	16.40	8.50	2.00	16.00	13.00	200
19205781	M12 x 1	21.00	8.15	1.00	16.00	17.00	250
19207811	M12 x 1.5	20.80	9.87	1.00	17.60	17.00	250
19209901	M12 x 1.5	20.80	11.50	1.00	19.20	17.00	250
19234811	M12 x 1.75	20.85	8.55	1.00	16.15	17.00	250
19240891	M14 x 1.5	20.80	8.53	2.00	16.35	17.00	250
19242981	M14 x 1.5	20.90	11.30	2.00	19.10	17.00	250
19243071	M14 x 2	22.12	11.58	2.00	19.10	17.00	200
19250051	M16 x 1.5	20.80	8.80	2.00	16.60	17.00	250
19252671	M16 x 1.5	22.86	8.77	2.00	16.45	17.00	200
19275151	M16 x 1.5	22.87	11.30	2.00	18.70	17.00	500
19310381	M16 x 1.5	31.95	8.50	2.00	15.90	17.00	500
19318691	M16 x 2	23.30	8.90	2.00	16.80	17.00	200
19327321	M18 x 1.5	28.70	8.40	2.00	15.90	22.00	500

TPM Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches						Packaging
	TH	D	H1	H2	H	SW	
	Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	Carton quantity
19119631	M5 x 0.8	0.402	0.315	0.039	0.543	0.315	500
19126951	M6 x 0.75	0.472	0.276	0.039	0.492	0.394	500
19165411	M6 x 1	0.461	0.291	0.039	0.492	0.394	500
19165821	M8 x 1	0.423	0.287	0.039	0.512	0.315	500
19168331	M8 x 1.25	0.657	0.344	0.039	0.644	0.472	200
19169331	M10 x 1	0.646	0.331	0.079	0.626	0.512	200
19178831	M10 x 1	0.816	0.331	0.079	0.638	0.669	200
19184851	M10 x 1.25	0.815	0.335	0.079	0.642	0.512	250
19193631	M10 x 1.5	0.646	0.335	0.079	0.630	0.512	200
19205781	M12 x 1	0.827	0.321	0.039	0.630	0.669	250
19207811	M12 x 1.5	0.819	0.389	0.039	0.693	0.669	250
19209901	M12 x 1.5	0.819	0.453	0.039	0.756	0.669	250
19234811	M12 x 1.75	0.821	0.337	0.039	0.636	0.669	250
19240891	M14 x 1.5	0.819	0.336	0.079	0.644	0.669	250
19242981	M14 x 1.5	0.823	0.445	0.079	0.752	0.669	250
19243071	M14 x 2	0.871	0.456	0.079	0.752	0.669	200
19250051	M16 x 1.5	0.819	0.346	0.079	0.654	0.669	250
19252671	M16 x 1.5	0.900	0.345	0.079	0.648	0.669	200
19275151	M16 x 1.5	0.900	0.445	0.079	0.736	0.669	500
19310381	M16 x 1.5	1.258	0.335	0.079	0.626	0.669	500
19318691	M16 x 2	0.917	0.350	0.079	0.661	0.669	200
19327321	M18 x 1.5	1.130	0.331	0.079	0.626	0.866	500

TPM Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm						Packaging
	TH	D	H1	H2	H	SW	
	Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	Carton quantity
19329081	M18 x 1.5	28.10	11.16	2.00	19.00	22.00	500
19329771	M20 x 1.5	27.40	8.56	2.00	16.30	22.00	500
19332101	M20 x 1.5	27.50	13.65	2.00	21.40	22.00	500
19341901	M20 x 2.5	27.45	8.45	2.00	16.25	22.00	500
19352511	M22 x 1.5	28.50	8.48	2.00	16.13	22.00	250
19355201	M22 x 1.5	28.55	11.35	2.00	19.00	22.00	250
19366421	M22 x 1.5	31.80	11.68	2.00	19.70	22.00	250
19371271	M24 x 1.5	32.00	11.50	2.00	19.50	22.00	250
19372001	M25 x 1.5	34.90	15.00	2.00	23.00	27.00	250
19379251	M26 x 1.5	35.32	11.83	2.00	19.65	27.00	250
19386491	M27 x 2	34.80	11.63	2.00	22.45	27.00	250
19408231	M30 x 2	38.35	11.54	2.00	22.54	27.00	250
19421741	M33 x 2	38.84	11.50	2.00	22.50	27.00	250
19426861	M42 x 2	52.90	12.17	2.00	21.87	36.00	100
19429971	M48 x 2	56.12	15.45	2.00	25.25	36.00	100
19437181	M48 x 2	59.90	15.00	2.00	25.20	36.00	100
19456561	R 1/8"	17.00	8.50	2.00	16.00	12.00	200
19466401	R 1/4"	20.85	8.50	2.00	16.00	17.00	250
19467291	R 1/4"	23.11	8.50	1.00	16.00	17.00	250
19472391	R 3/8"	20.86	8.00	2.00	15.17	17.00	250
19475191	R 3/8"	24.88	8.20	2.00	15.70	17.00	200
19477821	R 3/8"	28.56	8.00	1.00	15.80	22.00	500
19497081	R 3/8"	31.70	8.30	2.00	16.00	22.00	500
19498221	R 1/2"	28.70	8.50	2.00	16.20	22.00	500
19499791	R 1/2"	31.50	8.30	2.00	16.20	22.00	500
19516091	R 5/8"	28.80	8.50	1.00	16.50	22.00	500
19521791	R 3/4-14"	35.35	12.00	2.00	23.00	27.00	250
19553001	R 1"	38.50	11.70	2.00	19.30	32.00	250
19564801	R 1"	44.50	11.70	2.00	21.60	32.00	250
19590421	R 1-1/4"	53.35	12.45	2.00	22.20	36.00	200
19590961	R 1-1/2"	60.00	15.00	2.00	25.00	36.00	150
19594871	7/16-20 UNF	20.85	8.50	2.00	16.00	17.00	250
19601471	7/16-20 UNF	20.85	11.50	2.00	19.40	17.00	250
19603921	7/16-20 UNF	24.70	8.45	2.00	16.12	17.00	200
19604401	1/2-20 UNF	16.80	11.45	1.00	19.15	12.00	250
19608951	9/16-18 UNF	21.05	8.50	2.00	16.40	17.00	250
19612931	9/16-18 UNF	21.05	11.50	2.00	19.22	17.00	250





TPM Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches						Packaging
	TH	D	H1	H2	H	SW	
	Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	Carton quantity
19329081	M18 x 1.5	1.106	0.439	0.079	0.748	0.866	500
19329771	M20 x 1.5	1.079	0.337	0.079	0.642	0.866	500
19332101	M20 x 1.5	1.083	0.537	0.079	0.843	0.866	500
19341901	M20 x 2.5	1.081	0.333	0.079	0.640	0.866	500
19352511	M22 x 1.5	1.122	0.334	0.079	0.635	0.866	250
19355201	M22 x 1.5	1.124	0.447	0.079	0.748	0.866	250
19366421	M22 x 1.5	1.252	0.460	0.079	0.776	0.866	250
19371271	M24 x 1.5	1.260	0.453	0.079	0.768	0.866	250
19372001	M25 x 1.5	1.374	0.591	0.079	0.906	1.063	250
19379251	M26 x 1.5	1.391	0.466	0.079	0.774	1.063	250
19386491	M27 x 2	1.370	0.458	0.079	0.884	1.063	250
19408231	M30 x 2	1.510	0.454	0.079	0.887	1.063	250
19421741	M33 x 2	1.529	0.453	0.079	0.886	1.063	250
19426861	M42 x 2	2.083	0.479	0.079	0.861	1.417	100
19429971	M48 x 2	2.209	0.608	0.079	0.994	1.417	100
19437181	M48 x 2	2.358	0.591	0.079	0.992	1.417	100
19456561	R 1/8"	0.669	0.335	0.079	0.630	0.472	200
19466401	R 1/4"	0.821	0.335	0.079	0.630	0.669	250
19467291	R 1/4"	0.910	0.335	0.039	0.630	0.669	250
19472391	R 3/8"	0.821	0.315	0.079	0.597	0.669	250
19475191	R 3/8"	0.980	0.323	0.079	0.618	0.669	200
19477821	R 3/8"	1.124	0.315	0.039	0.622	0.866	500
19497081	R 3/8"	1.248	0.327	0.079	0.630	0.866	500
19498221	R 1/2"	1.130	0.335	0.079	0.638	0.866	500
19499791	R 1/2"	1.240	0.327	0.079	0.638	0.866	500
19516091	R 5/8"	1.134	0.335	0.039	0.650	0.866	500
19521791	R 3/4-14"	1.392	0.472	0.079	0.906	1.063	250
19553001	R 1"	1.516	0.461	0.079	0.760	1.260	250
19564801	R 1"	1.752	0.461	0.079	0.850	1.260	250
19590421	R 1-1/4"	2.100	0.490	0.079	0.874	1.417	200
19590961	R 1-1/2"	2.362	0.591	0.079	0.984	1.417	150
19594871	7/16-20 UNF	0.821	0.335	0.079	0.630	0.669	250
19601471	7/16-20 UNF	0.821	0.453	0.079	0.764	0.669	250
19603921	7/16-20 UNF	0.972	0.333	0.079	0.635	0.669	200
19604401	1/2-20 UNF	0.661	0.451	0.039	0.754	0.472	250
19608951	9/16-18 UNF	0.829	0.335	0.079	0.646	0.669	250
19612931	9/16-18 UNF	0.829	0.453	0.079	0.757	0.669	250





TPM Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm						Packaging
	TH	D	H1	H2	H	SW	Carton quantity
	Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	
19615981	9/16-18 UNF	24.10	11.30	2.00	19.00	17.00	200
19640981	5/8-18 UNF	20.90	8.50	1.00	16.30	17.00	250
19653681	3/4-16 UNF	28.50	10.60	2.00	18.20	22.00	500
19655771	3/4-16 UNF	32.40	10.60	2.00	18.00	22.00	500
19669061	7/8-14 UNF	28.80	12.00	2.00	19.70	22.00	500
19677691	7/8-14 UNF	31.80	12.56	2.00	20.00	22.00	500
19696991	1-1/16-12 UNF	31.50	11.30	2.00	18.90	27.00	100
19699691	1-1/16-12 UNF	35.30	11.60	2.00	19.40	27.00	100
19704251	1-1/16-12 UNF	37.85	11.40	2.00	19.40	27.00	250
19727531	1-3/16-12 UNF	38.80	11.50	2.00	22.78	27.00	250
19731411	1-3/16-12 UNF	38.80	15.80	2.00	26.90	27.00	250
19738271	1-5/16-12 UNF	44.00	11.50	2.00	21.40	32.00	200
19738581	1-7/16-12 UNF	53.80	11.70	2.00	21.70	36.00	200
19746831	1-5/8-12 UNF	52.90	12.65	2.00	22.35	36.00	200
19760851	1-7/8-12 UNF	62.30	15.33	2.00	24.78	40.40	100
19761411	1-8 UNC	45.50	11.70	2.00	19.30	32.00	1000
Part Number	TH	D	H1	H2	H	SW	Carton quantity
	Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	
	Dimensions in mm						Packaging



TPM Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches						Packaging
	TH	D	H1	H2	H	SW	Carton quantity
	Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	
19615981	9/16-18 UNF	0.949	0.445	0.079	0.748	0.669	200
19640981	5/8-18 UNF	0.823	0.335	0.039	0.642	0.669	250
19653681	3/4-16 UNF	1.122	0.417	0.079	0.717	0.866	500
19655771	3/4-16 UNF	1.276	0.417	0.079	0.709	0.866	500
19669061	7/8-14 UNF	1.134	0.472	0.079	0.776	0.866	500
19677691	7/8-14 UNF	1.252	0.494	0.079	0.787	0.866	500
19696991	1 1/16-12 UNF	1.240	0.445	0.079	0.744	1.063	100
19699691	1 1/16-12 UNF	1.390	0.457	0.079	0.764	1.063	100
19704251	1 1/16-12 UNF	1.490	0.449	0.079	0.764	1.063	250
19727531	1 3/16-12 UNF	1.528	0.453	0.079	0.897	1.063	250
19731411	1 3/16-12 UNF	1.528	0.622	0.079	1.059	1.063	250
19738271	1 5/16-12 UNF	1.732	0.453	0.079	0.843	1.260	200
19738581	1 7/16-12 UNF	2.118	0.461	0.079	0.854	1.417	200
19746831	1 5/8-12 UNF	2.083	0.498	0.079	0.880	1.417	200
19760851	1 7/8-12 UNF	2.453	0.604	0.079	0.976	1.591	100
19761411	1-8 UNC	1.791	0.461	0.079	0.760	1.260	1000
Part Number	TH	D	H1	H2	H	SW	Carton quantity
	Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	
	Dimensions in inches						Packaging



TPL Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Enhanced Performance Threaded Plug

The TPL Series plug provides enhanced levels of sealing for threaded ports to protect operational integrity. Contoured for a snug fit against contaminants, temperature change, and vibration, the abrasion-resistant construction maintains functionality, to extend working life. Practical hexagonal design enables manipulation with standard tools.

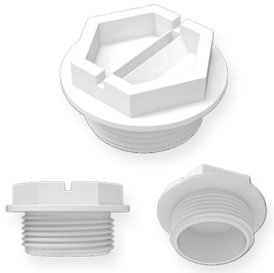

Material: Polyamide 6.6 (PA6.6)
Temperature Resistance: 149°**C** / 300°**F**

***Also available in a series that includes a gasket**

Clear (-**CL**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm					Packaging
	TH	D	H1	H	SW	
	Thread size	Flange diameter	Height	Overall height	Distance across flats	Carton quantity
19105641	M5 x 0.8	10.20	8.00	13.80	8.00	500
19123731	M6 x 0.75	12.00	7.00	12.50	10.00	500
19139031	M6 x 1	11.70	7.40	12.50	10.00	500
19141581	M8 x 1	10.75	7.30	13.00	8.00	500
19142621	M8 x 1.25	16.70	8.75	16.35	12.00	200
19166211	M10 x 1	16.40	8.40	15.90	13.00	200
19189971	M10 x 1	20.72	8.42	16.20	17.00	200
19190531	M10 x 1.25	20.70	8.50	16.30	13.00	250
19198181	M10 x 1.5	16.40	8.50	16.00	13.00	200
19199771	M12 x 1	21.00	8.15	16.00	17.00	250
19208191	M12 x 1.5	20.80	9.87	17.60	17.00	250
19213521	M12 x 1.5	20.80	11.50	19.20	17.00	250
19230141	M12 x 1.75	20.85	8.55	16.15	17.00	250
19232211	M14 x 1.5	20.80	8.53	16.35	17.00	250
19257101	M14 x 1.5	20.90	11.30	19.10	17.00	250
19259921	M14 x 2	22.12	11.58	19.10	17.00	200
19271801	M16 x 1.5	20.80	8.80	16.60	17.00	250
19281401	M16 x 1.5	22.86	8.77	16.45	17.00	200
19293451	M16 x 1.5	22.87	11.30	18.70	17.00	500
19305671	M16 x 1.5	31.95	8.50	15.90	17.00	500
19306261	M16 x 2	23.30	8.90	16.80	17.00	200
19306391	M18 x 1.5	28.70	8.40	15.90	22.00	500

TPL Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches					Packaging
	TH	D	H1	H	SW	
	Thread size	Flange diameter	Height	Overall height	Distance across flats	Carton quantity
19105641	M5 x 0.8	0.402	0.315	0.543	0.315	500
19123731	M6 x 0.75	0.472	0.276	0.492	0.394	500
19139031	M6 x 1	0.461	0.291	0.492	0.394	500
19141581	M8 x 1	0.423	0.287	0.512	0.315	500
19142621	M8 x 1.25	0.657	0.344	0.644	0.472	200
19166211	M10 x 1	0.646	0.331	0.626	0.512	200
19189971	M10 x 1	0.816	0.331	0.638	0.669	200
19190531	M10 x 1.25	0.815	0.335	0.642	0.512	250
19198181	M10 x 1.5	0.646	0.335	0.630	0.512	200
19199771	M12 x 1	0.827	0.321	0.630	0.669	250
19208191	M12 x 1.5	0.819	0.389	0.693	0.669	250
19213521	M12 x 1.5	0.819	0.453	0.756	0.669	250
19230141	M12 x 1.75	0.821	0.337	0.636	0.669	250
19232211	M14 x 1.5	0.819	0.336	0.644	0.669	250
19257101	M14 x 1.5	0.823	0.445	0.752	0.669	250
19259921	M14 x 2	0.871	0.456	0.752	0.669	200
19271801	M16 x 1.5	0.819	0.346	0.654	0.669	250
19281401	M16 x 1.5	0.900	0.345	0.648	0.669	200
19293451	M16 x 1.5	0.900	0.445	0.736	0.669	500
19305671	M16 x 1.5	1.258	0.335	0.626	0.669	500
19306261	M16 x 2	0.917	0.350	0.661	0.669	200
19306391	M18 x 1.5	1.130	0.331	0.626	0.866	500

TPL Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm					Packaging
	TH	D	H1	H	SW	
	Thread size	Flange diameter	Height	Overall height	Distance across flats	Carton quantity
19335161	M18 x 1.5	28.10	11.16	19.00	22.00	500
19358281	M20 x 1.5	27.40	8.56	16.30	22.00	500
19358441	M20 x 1.5	27.50	13.65	21.40	22.00	500
19361861	M20 x 2.5	27.45	8.45	16.25	22.00	500
19364111	M22 x 1.5	28.50	8.48	16.13	22.00	250
19370671	M22 x 1.5	28.55	11.35	19.00	22.00	250
19382151	M22 x 1.5	31.80	11.68	19.70	22.00	250
19385641	M24 x 1.5	32.00	11.50	19.50	22.00	250
19399761	M25 x 1.5	34.90	15.00	23.00	27.00	250
19405771	M26 x 1.5	35.32	11.83	19.65	27.00	250
19418851	M27 x 2	34.80	11.63	22.45	27.00	250
19461191	M30 x 2	38.35	11.54	22.54	27.00	250
19463101	M33 x 2	38.84	11.50	22.50	27.00	250
19471391	M42 x 2	52.90	12.17	21.87	36.00	100
19486141	M48 x 2	56.12	15.45	25.25	36.00	100
19493991	M48 x 2	59.90	15.00	25.20	36.00	100
19503351	R 1/8"	17.00	8.50	16.00	12.00	200
19504581	R 1/4"	20.85	8.50	16.00	17.00	250
19505831	R 1/4"	23.11	8.50	16.00	17.00	250
19519401	R 3/8"	20.86	8.00	15.17	17.00	250
19526791	R 3/8"	24.88	8.20	15.70	17.00	200
19533401	R 3/8"	28.56	8.00	15.80	22.00	500
19547051	R 3/8"	31.70	8.30	16.00	22.00	500
19547981	R 1/2"	28.70	8.50	16.20	22.00	500
19560711	R 1/2"	31.50	8.30	16.20	22.00	500
19577831	R 5/8"	28.80	8.50	16.50	22.00	500
19587771	R 3/4-14"	35.35	12.00	23.00	27.00	250
19598301	R 1"	38.50	11.70	19.30	32.00	250
19602381	R 1"	44.50	11.70	21.60	32.00	250
19606081	R 1-1/4"	53.35	12.45	22.20	36.00	200
19608811	R 1-1/2"	60.00	15.00	25.00	36.00	150
19626111	7/16-20 UNF	20.85	8.50	16.00	17.00	250
19636641	7/16-20 UNF	20.85	11.50	19.40	17.00	250
19639621	7/16-20 UNF	24.70	8.45	16.12	17.00	200
19643091	1/2-20 UNF	16.80	11.45	19.15	12.00	250
19663711	9/16-18 UNF	21.05	8.50	16.40	17.00	250
19673561	9/16-18 UNF	21.05	11.50	19.22	17.00	250



TPL Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches					Packaging
	TH	D	H1	H	SW	
	Thread size	Flange diameter	Height	Overall height	Distance across flats	Carton quantity
19335161	M18 x 1.5	1.106	0.439	0.748	0.866	500
19358281	M20 x 1.5	1.079	0.337	0.642	0.866	500
19358441	M20 x 1.5	1.083	0.537	0.843	0.866	500
19361861	M20 x 2.5	1.081	0.333	0.640	0.866	500
19364111	M22 x 1.5	1.122	0.334	0.635	0.866	250
19370671	M22 x 1.5	1.124	0.447	0.748	0.866	250
19382151	M22 x 1.5	1.252	0.460	0.776	0.866	250
19385641	M24 x 1.5	1.260	0.453	0.768	0.866	250
19399761	M25 x 1.5	1.374	0.591	0.906	1.063	250
19405771	M26 x 1.5	1.391	0.466	0.774	1.063	250
19418851	M27 x 2	1.370	0.458	0.884	1.063	250
19461191	M30 x 2	1.510	0.454	0.887	1.063	250
19463101	M33 x 2	1.529	0.453	0.886	1.063	250
19471391	M42 x 2	2.083	0.479	0.861	1.417	100
19486141	M48 x 2	2.209	0.608	0.994	1.417	100
19493991	M48 x 2	2.358	0.591	0.992	1.417	100
19503351	R 1/8"	0.669	0.335	0.630	0.472	200
19504581	R 1/4"	0.821	0.335	0.630	0.669	250
19505831	R 1/4"	0.910	0.335	0.630	0.669	250
19519401	R 3/8"	0.821	0.315	0.597	0.669	250
19526791	R 3/8"	0.980	0.323	0.618	0.669	200
19533401	R 3/8"	1.124	0.315	0.622	0.866	500
19547051	R 3/8"	1.248	0.327	0.630	0.866	500
19547981	R 1/2"	1.130	0.335	0.638	0.866	500
19560711	R 1/2"	1.240	0.327	0.638	0.866	500
19577831	R 5/8"	1.134	0.335	0.650	0.866	500
19587771	R 3/4-14"	1.392	0.472	0.906	1.063	250
19598301	R 1"	1.516	0.461	0.760	1.260	250
19602381	R 1"	1.752	0.461	0.850	1.260	250
19606081	R 1-1/4"	2.100	0.490	0.874	1.417	200
19608811	R 1-1/2"	2.362	0.591	0.984	1.417	150
19626111	7/16-20 UNF	0.821	0.335	0.630	0.669	250
19636641	7/16-20 UNF	0.821	0.453	0.764	0.669	250
19639621	7/16-20 UNF	0.972	0.333	0.635	0.669	200
19643091	1/2-20 UNF	0.661	0.451	0.754	0.472	250
19663711	9/16-18 UNF	0.829	0.335	0.646	0.669	250
19673561	9/16-18 UNF	0.829	0.453	0.757	0.669	250



TPL Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm					Packaging
	TH	D	H1	H	SW	
	Thread size	Flange diameter	Height	Overall height	Distance across flats	Carton quantity
19698221	9/16-18 UNF	24.10	11.30	19.00	17.00	200
19703541	5/8-18 UNF	20.90	8.50	16.30	17.00	250
19706891	3/4-16 UNF	28.50	10.60	18.20	22.00	500
19731261	3/4-16 UNF	32.40	10.60	18.00	22.00	500
19734251	7/8-14 UNF	28.80	12.00	19.70	22.00	500
19755141	7/8-14 UNF	31.80	12.56	20.00	22.00	500
19773061	1-1/16-12 UNF	31.50	11.30	18.90	27.00	100
19781051	1-1/16-12 UNF	35.30	11.60	19.40	27.00	100
19802511	1-1/16-12 UNF	37.85	11.40	19.40	27.00	250
19827471	1-3/16-12 UNF	38.80	11.50	22.78	27.00	250
19847591	1-3/16-12 UNF	38.80	15.80	26.90	27.00	250
19848421	1-5/16-12 UNF	44.00	11.50	21.40	32.00	200
19854741	1-7/16-12 UNF	53.80	11.70	21.70	36.00	200
19882091	1-5/8-12 UNF	52.90	12.65	22.35	36.00	200
19895261	1-7/8-12 UNF	62.30	15.33	24.78	40.40	100
19899591	1-8 UNC	45.50	11.70	19.30	32.00	1000
Part Number	TH	D	H1	H	SW	Carton quantity
	Thread size	Flange diameter	Height	Overall height	Distance across flats	
	Dimensions in mm					Packaging





TPL Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches					Packaging
	TH	D	H1	H	SW	
	Thread size	Flange diameter	Height	Overall height	Distance across flats	Carton quantity
19698221	9/16-18 UNF	0.949	0.445	0.748	0.669	200
19703541	5/8-18 UNF	0.823	0.335	0.642	0.669	250
19706891	3/4-16 UNF	1.122	0.417	0.717	0.866	500
19731261	3/4-16 UNF	1.276	0.417	0.709	0.866	500
19734251	7/8-14 UNF	1.134	0.472	0.776	0.866	500
19755141	7/8-14 UNF	1.252	0.494	0.787	0.866	500
19773061	1-1/16-12 UNF	1.240	0.445	0.744	1.063	100
19781051	1-1/16-12 UNF	1.390	0.457	0.764	1.063	100
19802511	1-1/16-12 UNF	1.490	0.449	0.764	1.063	250
19827471	1-3/16-12 UNF	1.528	0.453	0.897	1.063	250
19847591	1-3/16-12 UNF	1.528	0.622	1.059	1.063	250
19848421	1-5/16-12 UNF	1.732	0.453	0.843	1.260	200
19854741	1-7/16-12 UNF	2.118	0.461	0.854	1.417	200
19882091	1-5/8-12 UNF	2.083	0.498	0.880	1.417	200
19895261	1-7/8-12 UNF	2.453	0.604	0.976	1.591	100
19899591	1-8 UNC	1.791	0.461	0.760	1.260	1000
Part Number	TH	D	H1	H	SW	Carton quantity
	Thread size	Flange diameter	Height	Overall height	Distance across flats	
	Dimensions in inches					Packaging





TPE Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Reinforced Threaded Plug with Gasket

The TPE Series plug's innovative design fits tightly to internal threads while the durable barrier against contaminants resists stripping under torque. Leak prevention maintains internal pressure and the plug withstands high temperatures or corrosive agents. The textured hexagonal head surface improves grip, reducing slippage during handling.

Material: Glass Fibre Reinforced Polyamide (PA GF)
Gasket: Thermoplastic Elastomer (TPE)
Temperature Resistance: 149°**C** / 300°**F**

***Also available as a series without a gasket**

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm						Packaging
	TH	D	H1	H2	H	SW	
	Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	Carton quantity
19130631	M5 x 0.8	10.20	8.00	1.00	13.80	8.00	500
19131161	M6 x 0.75	12.00	7.00	1.00	12.50	10.00	500
19136011	M6 x 1	11.70	7.40	1.00	12.50	10.00	500
19143731	M8 x 1	10.75	7.30	1.00	13.00	8.00	500
19147471	M8 x 1.25	16.70	8.75	1.00	16.35	12.00	200
19150191	M10 x 1	16.40	8.40	2.00	15.90	13.00	200
19156191	M10 x 1	20.72	8.42	2.00	16.20	17.00	200
19163131	M10 x 1.25	20.70	8.50	2.00	16.30	13.00	250
19186141	M10 x 1.5	16.40	8.50	2.00	16.00	13.00	200
19190211	M12 x 1	21.00	8.15	1.00	16.00	17.00	250
19203571	M12 x 1.5	20.80	9.87	1.00	17.60	17.00	250
19207581	M12 x 1.5	20.80	11.50	1.00	19.20	17.00	250
19215711	M12 x 1.75	20.85	8.55	1.00	16.15	17.00	250
19227751	M14 x 1.5	20.80	8.53	2.00	16.35	17.00	250
19240661	M14 x 1.5	20.90	11.30	2.00	19.10	17.00	250
19248661	M14 x 2	22.12	11.58	2.00	19.10	17.00	200
19254361	M16 x 1.5	20.80	8.80	2.00	16.60	17.00	250
19262011	M16 x 1.5	22.86	8.77	2.00	16.45	17.00	200
19265601	M16 x 1.5	22.87	11.30	2.00	18.70	17.00	500
19272821	M16 x 1.5	31.95	8.50	2.00	15.90	17.00	500
19274841	M16 x 2	23.30	8.90	2.00	16.80	17.00	200
19281681	M18 x 1.5	28.70	8.40	2.00	15.90	22.00	500

TPE Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches						Packaging
	TH	D	H1	H2	H	SW	
	Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	Carton quantity
19130631	M5 x 0.8	0.402	0.315	0.039	0.543	0.315	500
19131161	M6 x 0.75	0.472	0.276	0.039	0.492	0.394	500
19136011	M6 x 1	0.461	0.291	0.039	0.492	0.394	500
19143731	M8 x 1	0.423	0.287	0.039	0.512	0.315	500
19147471	M8 x 1.25	0.657	0.344	0.039	0.644	0.472	200
19150191	M10 x 1	0.646	0.331	0.079	0.626	0.512	200
19156191	M10 x 1	0.816	0.331	0.079	0.638	0.669	200
19163131	M10 x 1.25	0.815	0.335	0.079	0.642	0.512	250
19186141	M10 x 1.5	0.646	0.335	0.079	0.630	0.512	200
19190211	M12 x 1	0.827	0.321	0.039	0.630	0.669	250
19203571	M12 x 1.5	0.819	0.389	0.039	0.693	0.669	250
19207581	M12 x 1.5	0.819	0.453	0.039	0.756	0.669	250
19215711	M12 x 1.75	0.821	0.337	0.039	0.636	0.669	250
19227751	M14 x 1.5	0.819	0.336	0.079	0.644	0.669	250
19240661	M14 x 1.5	0.823	0.445	0.079	0.752	0.669	250
19248661	M14 x 2	0.871	0.456	0.079	0.752	0.669	200
19254361	M16 x 1.5	0.819	0.346	0.079	0.654	0.669	250
19262011	M16 x 1.5	0.900	0.345	0.079	0.648	0.669	200
19265601	M16 x 1.5	0.900	0.445	0.079	0.736	0.669	500
19272821	M16 x 1.5	1.258	0.335	0.079	0.626	0.669	500
19274841	M16 x 2	0.917	0.350	0.079	0.661	0.669	200
19281681	M18 x 1.5	1.130	0.331	0.079	0.626	0.866	500

TPE Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm						Packaging
	TH	D	H1	H2	H	SW	
	Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	Carton quantity
19292281	M18 x 1.5	28.10	11.16	2.00	19.00	22.00	500
19296981	M20 x 1.5	27.40	8.56	2.00	16.30	22.00	500
19298511	M20 x 1.5	27.50	13.65	2.00	21.40	22.00	500
19305291	M20 x 2.5	27.45	8.45	2.00	16.25	22.00	500
19324551	M22 x 1.5	28.50	8.48	2.00	16.13	22.00	250
19373331	M22 x 1.5	28.55	11.35	2.00	19.00	22.00	250
19375141	M22 x 1.5	31.80	11.68	2.00	19.70	22.00	250
19377031	M24 x 1.5	32.00	11.50	2.00	19.50	22.00	250
19391021	M25 x 1.5	34.90	15.00	2.00	23.00	27.00	250
19423981	M26 x 1.5	35.32	11.83	2.00	19.65	27.00	250
19424391	M27 x 2	34.80	11.63	2.00	22.45	27.00	250
19428681	M30 x 2	38.35	11.54	2.00	22.54	27.00	250
19436271	M33 x 2	38.84	11.50	2.00	22.50	27.00	250
19438651	M42 x 2	52.90	12.17	2.00	21.87	36.00	100
19439151	M48 x 2	56.12	15.45	2.00	25.25	36.00	100
19442461	M48 x 2	59.90	15.00	2.00	25.20	36.00	100
19451841	R 1/8"	17.00	8.50	2.00	16.00	12.00	200
19452881	R 1/4"	20.85	8.50	2.00	16.00	17.00	250
19454321	R 1/4"	23.11	8.50	1.00	16.00	17.00	250
19458751	R 3/8"	20.86	8.00	2.00	15.17	17.00	250
19461171	R 3/8"	24.88	8.20	2.00	15.70	17.00	200
19468461	R 3/8"	28.56	8.00	1.00	15.80	22.00	500
19489471	R 3/8"	31.70	8.30	2.00	16.00	22.00	500
19510211	R 1/2"	28.70	8.50	2.00	16.20	22.00	500
19511931	R 1/2"	31.50	8.30	2.00	16.20	22.00	500
19517871	R 5/8"	28.80	8.50	1.00	16.50	22.00	500
19520371	R 3/4-14"	35.35	12.00	2.00	23.00	27.00	250
19549391	R 1"	38.50	11.70	2.00	19.30	32.00	250
19552701	R 1"	44.50	11.70	2.00	21.60	32.00	250
19554121	R 1-1/4"	53.35	12.45	2.00	22.20	36.00	200
19566441	R 1-1/2"	60.00	15.00	2.00	25.00	36.00	150
19566761	7/16-20 UNF	20.85	8.50	2.00	16.00	17.00	250
19575611	7/16-20 UNF	20.85	11.50	2.00	19.40	17.00	250
19600971	7/16-20 UNF	24.70	8.45	2.00	16.12	17.00	200
19601841	1/2-20 UNF	16.80	11.45	1.00	19.15	12.00	250
19610521	9/16-18 UNF	21.05	8.50	2.00	16.40	17.00	250
19622161	9/16-18 UNF	21.05	11.50	2.00	19.22	17.00	250





TPE Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches						Packaging
	TH	D	H1	H2	H	SW	
	Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	Carton quantity
19292281	M18 x 1.5	1.106	0.439	0.079	0.748	0.866	500
19296981	M20 x 1.5	1.079	0.337	0.079	0.642	0.866	500
19298511	M20 x 1.5	1.083	0.537	0.079	0.843	0.866	500
19305291	M20 x 2.5	1.081	0.333	0.079	0.640	0.866	500
19324551	M22 x 1.5	1.122	0.334	0.079	0.635	0.866	250
19373331	M22 x 1.5	1.124	0.447	0.079	0.748	0.866	250
19375141	M22 x 1.5	1.252	0.460	0.079	0.776	0.866	250
19377031	M24 x 1.5	1.260	0.453	0.079	0.768	0.866	250
19391021	M25 x 1.5	1.374	0.591	0.079	0.906	1.063	250
19423981	M26 x 1.5	1.391	0.466	0.079	0.774	1.063	250
19424391	M27 x 2	1.370	0.458	0.079	0.884	1.063	250
19428681	M30 x 2	1.510	0.454	0.079	0.887	1.063	250
19436271	M33 x 2	1.529	0.453	0.079	0.886	1.063	250
19438651	M42 x 2	2.083	0.479	0.079	0.861	1.417	100
19439151	M48 x 2	2.209	0.608	0.079	0.994	1.417	100
19442461	M48 x 2	2.358	0.591	0.079	0.992	1.417	100
19451841	R 1/8"	0.669	0.335	0.079	0.630	0.472	200
19452881	R 1/4"	0.821	0.335	0.079	0.630	0.669	250
19454321	R 1/4"	0.910	0.335	0.039	0.630	0.669	250
19458751	R 3/8"	0.821	0.315	0.079	0.597	0.669	250
19461171	R 3/8"	0.980	0.323	0.079	0.618	0.669	200
19468461	R 3/8"	1.124	0.315	0.039	0.622	0.866	500
19489471	R 3/8"	1.248	0.327	0.079	0.630	0.866	500
19510211	R 1/2"	1.130	0.335	0.079	0.638	0.866	500
19511931	R 1/2"	1.240	0.327	0.079	0.638	0.866	500
19517871	R 5/8"	1.134	0.335	0.039	0.650	0.866	500
19520371	R 3/4-14"	1.392	0.472	0.079	0.906	1.063	250
19549391	R 1"	1.516	0.461	0.079	0.760	1.260	250
19552701	R 1"	1.752	0.461	0.079	0.850	1.260	250
19554121	R 1-1/4"	2.100	0.490	0.079	0.874	1.417	200
19566441	R 1-1/2"	2.362	0.591	0.079	0.984	1.417	150
19566761	7/16-20 UNF	0.821	0.335	0.079	0.630	0.669	250
19575611	7/16-20 UNF	0.821	0.453	0.079	0.764	0.669	250
19600971	7/16-20 UNF	0.972	0.333	0.079	0.635	0.669	200
19601841	1/2-20 UNF	0.661	0.451	0.039	0.754	0.472	250
19610521	9/16-18 UNF	0.829	0.335	0.079	0.646	0.669	250
19622161	9/16-18 UNF	0.829	0.453	0.079	0.757	0.669	250





TPE Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm						Packaging
	TH	D	H1	H2	H	SW	Carton quantity
	Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	
19633531	9/16-18 UNF	24.10	11.30	2.00	19.00	17.00	200
19640321	5/8-18 UNF	20.90	8.50	1.00	16.30	17.00	250
19646561	3/4-16 UNF	28.50	10.60	2.00	18.20	22.00	500
19658701	3/4-16 UNF	32.40	10.60	2.00	18.00	22.00	500
19662311	7/8-14 UNF	28.80	12.00	2.00	19.70	22.00	500
19663181	7/8-14 UNF	31.80	12.56	2.00	20.00	22.00	500
19684881	1-1/16-12 UNF	31.50	11.30	2.00	18.90	27.00	100
19687431	1-1/16-12 UNF	35.30	11.60	2.00	19.40	27.00	100
19732401	1-1/16-12 UNF	37.85	11.40	2.00	19.40	27.00	250
19735401	1-3/16-12 UNF	38.80	11.50	2.00	22.78	27.00	250
19737531	1-3/16-12 UNF	38.80	15.80	2.00	26.90	27.00	250
19742591	1-5/16-12 UNF	44.00	11.50	2.00	21.40	32.00	200
19747741	1-7/16-12 UNF	53.80	11.70	2.00	21.70	36.00	200
19748321	1-5/8-12 UNF	52.90	12.65	2.00	22.35	36.00	200
19752291	1-7/8-12 UNF	62.30	15.33	2.00	24.78	40.40	100
19754291	1-8 UNC	45.50	11.70	2.00	19.30	32.00	1000
Part Number	TH	D	H1	H2	H	SW	Carton quantity
	Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	
	Dimensions in mm						Packaging



TPE Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches						Packaging
	TH	D	H1	H2	H	SW	Carton quantity
	Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	
19633531	9/16-18 UNF	0.949	0.445	0.079	0.748	0.669	200
19640321	5/8-18 UNF	0.823	0.335	0.039	0.642	0.669	250
19646561	3/4-16 UNF	1.122	0.417	0.079	0.717	0.866	500
19658701	3/4-16 UNF	1.276	0.417	0.079	0.709	0.866	500
19662311	7/8-14 UNF	1.134	0.472	0.079	0.776	0.866	500
19663181	7/8-14 UNF	1.252	0.494	0.079	0.787	0.866	500
19684881	1-1/16-12 UNF	1.240	0.445	0.079	0.744	1.063	100
19687431	1-1/16-12 UNF	1.390	0.457	0.079	0.764	1.063	100
19732401	1-1/16-12 UNF	1.490	0.449	0.079	0.764	1.063	250
19735401	1-3/16-12 UNF	1.528	0.453	0.079	0.897	1.063	250
19737531	1-3/16-12 UNF	1.528	0.622	0.079	1.059	1.063	250
19742591	1-5/16-12 UNF	1.732	0.453	0.079	0.843	1.260	200
19747741	1-7/16-12 UNF	2.118	0.461	0.079	0.854	1.417	200
19748321	1-5/8-12 UNF	2.083	0.498	0.079	0.880	1.417	200
19752291	1-7/8-12 UNF	2.453	0.604	0.079	0.976	1.591	100
19754291	1-8 UNC	1.791	0.461	0.079	0.760	1.260	1000
Part Number	TH	D	H1	H2	H	SW	Carton quantity
	Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	
	Dimensions in inches						Packaging



TPG Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Enhanced Performance Threaded Plug with Oil Seal Gasket

The TPG Series plug provides a seamless seal against contaminants while reducing leakage potential. Close internal threading interaction minimises wear, to enhance component integrity and operational life. Durable build withstands increased temperature and pressure. The hexagonal head enables quick installation or removal with standard tools.

Material: Polyamide 6.6 (PA6.6)
Gasket: Oil Resistant Thermoplastic Elastomer (TPE OIL RESISTANT)
Temperature Resistance: 149°**C** / 300°**F**

***This series includes a gasket**

Yellow (-**YL**)
RAL 1021



Green (-**GN**)
RAL 6038

Red (-**RD**)
RAL 3000

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm						Packaging
		TH	D	H1	H2	H	SW	Carton quantity
		Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	
19109981	Red	M12 x 1.5	20.70	9.50	1.00	16.90	17.00	250
19125531	Red	M12 x 1.5	20.70	11.50	1.00	18.90	17.00	250
19130711	Red	M16 x 1.5	22.80	8.70	1.00	16.10	17.00	200
19135411	Red	M18 x 1.5	28.70	8.50	1.00	15.90	22.00	500
19166661	Red	M18 x 1.5	28.70	11.50	1.00	18.90	22.00	500
19197581	Red	M22 x 1.5	32.00	11.50	1.00	19.50	22.00	250
19227121	Yellow	R 1/4"	20.80	8.50	1.00	15.90	17.00	250
19228361	Yellow	R 3/8"	24.80	8.25	1.00	15.85	17.00	200
19230241	Yellow	R 1/2"	28.80	8.50	1.00	16.30	22.00	500
19232421	Yellow	R 1/2"	32.00	8.50	1.00	16.30	22.00	100
19265701	Yellow	R 3/4"	35.00	11.70	1.00	19.30	27.00	250
19275581	Yellow	R 1"	44.50	11.70	1.00	19.20	32.00	250
19283191	Green	7/16-20 UNF	20.80	8.50	1.00	16.10	17.00	250
19298251	Green	7/16-20 UNF	20.80	11.50	1.00	19.00	17.00	250
19313721	Green	9/16-18 UNF	24.00	11.50	1.00	19.00	17.00	200
19340511	Green	3/4-16 UNF	28.70	10.60	1.00	18.20	22.00	500
19343701	Green	3/4-16 UNF	32.00	10.60	1.00	18.20	22.00	500
19352481	Green	7/8-14 UNF	32.00	12.00	1.00	19.60	22.00	500

Part Number	Colour	TH	D	H1	H2	H	SW	Carton quantity
		Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	
		Dimensions in mm						Packaging

TPG Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in inches						Packaging
		TH	D	H1	H2	H	SW	Carton quantity
		Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	
19109981	Red	M12 x 1.5	0.815	0.374	0.039	0.665	0.669	250
19125531	Red	M12 x 1.5	0.815	0.453	0.039	0.744	0.669	250
19130711	Red	M16 x 1.5	0.898	0.343	0.039	0.634	0.669	200
19135411	Red	M18 x 1.5	1.130	0.335	0.039	0.626	0.866	500
19166661	Red	M18 x 1.5	1.130	0.453	0.039	0.744	0.866	500
19197581	Red	M22 x 1.5	1.260	0.453	0.039	0.768	0.866	250
19227121	Yellow	R 1/4"	0.819	0.335	0.039	0.626	0.669	250
19228361	Yellow	R 3/8"	0.976	0.325	0.039	0.624	0.669	200
19230241	Yellow	R 1/2"	1.134	0.335	0.039	0.642	0.866	500
19232421	Yellow	R 1/2"	1.260	0.335	0.039	0.642	0.866	100
19265701	Yellow	R 3/4"	1.378	0.461	0.039	0.760	1.063	250
19275581	Yellow	R 1"	1.752	0.461	0.039	0.756	1.260	250
19283191	Green	7/16-20 UNF	0.819	0.335	0.039	0.634	0.669	250
19298251	Green	7/16-20 UNF	0.819	0.453	0.039	0.748	0.669	250
19313721	Green	9/16-18 UNF	0.945	0.453	0.039	0.748	0.669	200
19340511	Green	3/4-16 UNF	1.130	0.417	0.039	0.717	0.866	500
19343701	Green	3/4-16 UNF	1.260	0.417	0.039	0.717	0.866	500
19352481	Green	7/8-14 UNF	1.260	0.472	0.039	0.772	0.866	500

Part Number	Colour	TH	D	H1	H2	H	SW	Carton quantity
		Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	
		Dimensions in inches						Packaging



TPC Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Enhanced Performance Colour Coded Threaded Plug with Gasket

The TPC Series plug is tailored for exact compatibility with precision-engineered ports. The secure seal protects critical components across their lifecycle, preventing particle entry and reducing leakage risk. Maintaining full functionality under internal system pressure, the hexagonal head design is highly practical for efficient handling.

Material: Polyamide 6.6 (PA6.6)
Gasket: Thermoplastic Elastomer (TPE)
Temperature Resistance: 149°**C** / 300°**F**

***This series includes a gasket**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm						Packaging
		TH	D	H1	H2	H	SW	
		Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	Carton quantity
19100711	Red	M5 x 0.8	10.20	8.00	1.00	13.80	8.00	500
19103691	Red	M6 x 0.75	12.00	7.00	1.00	12.50	10.00	500
19115681	Red	M6 x 1	11.70	7.40	1.00	12.50	10.00	500
19118131	Red	M8 x 1	10.75	7.30	1.00	13.00	8.00	500
19120111	Red	M8 x 1.25	16.70	8.75	1.00	16.35	12.00	200
19144951	Red	M10 x 1	16.40	8.40	2.00	15.90	13.00	200
19150691	Red	M10 x 1	20.72	8.42	2.00	16.20	17.00	200
19150951	Red	M10 x 1.25	20.70	8.50	2.00	16.30	13.00	250
19159341	Red	M10 x 1.5	16.40	8.50	2.00	16.00	13.00	200
19160051	Red	M12 x 1	21.00	8.15	1.00	16.00	17.00	250
19170351	Red	M12 x 1.5	20.80	9.87	1.00	17.60	17.00	250
19170661	Red	M12 x 1.5	20.80	11.50	1.00	19.20	17.00	250
19173541	Red	M12 x 1.75	20.85	8.55	1.00	16.15	17.00	250
19174211	Red	M14 x 1.5	20.80	8.53	2.00	16.35	17.00	250
19192571	Red	M14 x 1.5	20.90	11.30	2.00	19.10	17.00	250
19216191	Red	M14 x 2	22.12	11.58	2.00	19.10	17.00	200
19219821	Red	M16 x 1.5	20.80	8.80	2.00	16.60	17.00	250
19226681	Red	M16 x 1.5	22.86	8.77	2.00	16.45	17.00	200
19230171	Red	M16 x 1.5	22.87	11.30	2.00	18.70	17.00	500
19236671	Red	M16 x 1.5	31.95	8.50	2.00	15.90	17.00	500
19249321	Red	M16 x 2	23.30	8.90	2.00	16.80	17.00	200
19252401	Red	M18 x 1.5	28.70	8.40	2.00	15.90	22.00	500

TPC Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in inches						Packaging
		TH	D	H1	H2	H	SW	
		Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	Carton quantity
19100711	Red	M5 x 0.8	0.402	0.315	0.039	0.543	0.315	500
19103691	Red	M6 x 0.75	0.472	0.276	0.039	0.492	0.394	500
19115681	Red	M6 x 1	0.461	0.291	0.039	0.492	0.394	500
19118131	Red	M8 x 1	0.423	0.287	0.039	0.512	0.315	500
19120111	Red	M8 x 1.25	0.657	0.344	0.039	0.644	0.472	200
19144951	Red	M10 x 1	0.646	0.331	0.079	0.626	0.512	200
19150691	Red	M10 x 1	0.816	0.331	0.079	0.638	0.669	200
19150951	Red	M10 x 1.25	0.815	0.335	0.079	0.642	0.512	250
19159341	Red	M10 x 1.5	0.646	0.335	0.079	0.630	0.512	200
19160051	Red	M12 x 1	0.827	0.321	0.039	0.630	0.669	250
19170351	Red	M12 x 1.5	0.819	0.389	0.039	0.693	0.669	250
19170661	Red	M12 x 1.5	0.819	0.453	0.039	0.756	0.669	250
19173541	Red	M12 x 1.75	0.821	0.337	0.039	0.636	0.669	250
19174211	Red	M14 x 1.5	0.819	0.336	0.079	0.644	0.669	250
19192571	Red	M14 x 1.5	0.823	0.445	0.079	0.752	0.669	250
19216191	Red	M14 x 2	0.871	0.456	0.079	0.752	0.669	200
19219821	Red	M16 x 1.5	0.819	0.346	0.079	0.654	0.669	250
19226681	Red	M16 x 1.5	0.900	0.345	0.079	0.648	0.669	200
19230171	Red	M16 x 1.5	0.900	0.445	0.079	0.736	0.669	500
19236671	Red	M16 x 1.5	1.258	0.335	0.079	0.626	0.669	500
19249321	Red	M16 x 2	0.917	0.350	0.079	0.661	0.669	200
19252401	Red	M18 x 1.5	1.130	0.331	0.079	0.626	0.866	500

TPC Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm						Packaging
		TH	D	H1	H2	H	SW	
		Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	Carton quantity
19254031	Red	M18 x 1.5	28.10	11.16	2.00	19.00	22.00	500
19257891	Red	M20 x 1.5	27.40	8.56	2.00	16.30	22.00	500
19259821	Red	M20 x 1.5	27.50	13.65	2.00	21.40	22.00	500
19291371	Red	M20 x 2.5	27.45	8.45	2.00	16.25	22.00	500
19296551	Red	M22 x 1.5	28.50	8.48	2.00	16.13	22.00	250
19297891	Red	M22 x 1.5	28.55	11.35	2.00	19.00	22.00	250
19303661	Red	M22 x 1.5	31.80	11.68	2.00	19.70	22.00	250
19308511	Red	M24 x 1.5	32.00	11.50	2.00	19.50	22.00	250
19311621	Red	M25 x 1.5	34.90	15.00	2.00	23.00	27.00	250
19313981	Red	M26 x 1.5	35.32	11.83	2.00	19.65	27.00	250
19320611	Red	M27 x 2	34.80	11.63	2.00	22.45	27.00	250
19321941	Red	M30 x 2	38.35	11.54	2.00	22.54	27.00	250
19330121	Red	M33 x 2	38.84	11.50	2.00	22.50	27.00	250
19345981	Red	M42 x 2	52.90	12.17	2.00	21.87	36.00	100
19346381	Red	M48 x 2	56.12	15.45	2.00	25.25	36.00	100
19360341	Red	M48 x 2	59.90	15.00	2.00	25.20	36.00	100
19360981	Yellow	R 1/8"	17.00	8.50	2.00	16.00	12.00	200
19366691	Yellow	R 1/4"	20.85	8.50	2.00	16.00	17.00	250
19367411	Yellow	R 1/4"	23.11	8.50	1.00	16.00	17.00	250
19371921	Yellow	R 3/8"	20.86	8.00	2.00	15.17	17.00	250
19377771	Yellow	R 3/8"	24.88	8.20	2.00	15.70	17.00	200
19382281	Yellow	R 3/8"	28.56	8.00	1.00	15.80	22.00	500
19383311	Yellow	R 3/8"	31.70	8.30	2.00	16.00	22.00	500
19391311	Yellow	R 1/2"	28.70	8.50	2.00	16.20	22.00	500
19402441	Yellow	R 1/2"	31.50	8.30	2.00	16.20	22.00	500
19409641	Yellow	R 5/8"	28.80	8.50	1.00	16.50	22.00	500
19444291	Yellow	R 3/4-14"	35.35	12.00	2.00	23.00	27.00	250
19482971	Yellow	R 1"	38.50	11.70	2.00	19.30	32.00	250
19486101	Yellow	R 1"	44.50	11.70	2.00	21.60	32.00	250
19487931	Yellow	R 1-1/4"	53.35	12.45	2.00	22.20	36.00	200
19496021	Yellow	R 1-1/2"	60.00	15.00	2.00	25.00	36.00	150
19508841	Green	7/16-20 UNF	20.85	8.50	2.00	16.00	17.00	250
19510651	Green	7/16-20 UNF	20.85	11.50	2.00	19.40	17.00	250
19535441	Green	7/16-20 UNF	24.70	8.45	2.00	16.12	17.00	200
19536461	Green	1/2-20 UNF	16.80	11.45	1.00	19.15	12.00	250
19539651	Green	9/16-18 UNF	21.05	8.50	2.00	16.40	17.00	250
19552561	Green	9/16-18 UNF	21.05	11.50	2.00	19.22	17.00	250





TPC Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in inches						Packaging
		TH	D	H1	H2	H	SW	
		Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	Carton quantity
19254031	Red	M18 x 1.5	1.106	0.439	0.079	0.748	0.866	500
19257891	Red	M20 x 1.5	1.079	0.337	0.079	0.642	0.866	500
19259821	Red	M20 x 1.5	1.083	0.537	0.079	0.843	0.866	500
19291371	Red	M20 x 2.5	1.081	0.333	0.079	0.640	0.866	500
19296551	Red	M22 x 1.5	1.122	0.334	0.079	0.635	0.866	250
19297891	Red	M22 x 1.5	1.124	0.447	0.079	0.748	0.866	250
19303661	Red	M22 x 1.5	1.252	0.460	0.079	0.776	0.866	250
19308511	Red	M24 x 1.5	1.260	0.453	0.079	0.768	0.866	250
19311621	Red	M25 x 1.5	1.374	0.591	0.079	0.906	1.063	250
19313981	Red	M26 x 1.5	1.391	0.466	0.079	0.774	1.063	250
19320611	Red	M27 x 2	1.370	0.458	0.079	0.884	1.063	250
19321941	Red	M30 x 2	1.510	0.454	0.079	0.887	1.063	250
19330121	Red	M33 x 2	1.529	0.453	0.079	0.886	1.063	250
19345981	Red	M42 x 2	2.083	0.479	0.079	0.861	1.417	100
19346381	Red	M48 x 2	2.209	0.608	0.079	0.994	1.417	100
19360341	Red	M48 x 2	2.358	0.591	0.079	0.992	1.417	100
19360981	Yellow	R 1/8"	0.669	0.335	0.079	0.630	0.472	200
19366691	Yellow	R 1/4"	0.821	0.335	0.079	0.630	0.669	250
19367411	Yellow	R 1/4"	0.910	0.335	0.039	0.630	0.669	250
19371921	Yellow	R 3/8"	0.821	0.315	0.079	0.597	0.669	250
19377771	Yellow	R 3/8"	0.980	0.323	0.079	0.618	0.669	200
19382281	Yellow	R 3/8"	1.124	0.315	0.039	0.622	0.866	500
19383311	Yellow	R 3/8"	1.248	0.327	0.079	0.630	0.866	500
19391311	Yellow	R 1/2"	1.130	0.335	0.079	0.638	0.866	500
19402441	Yellow	R 1/2"	1.240	0.327	0.079	0.638	0.866	500
19409641	Yellow	R 5/8"	1.134	0.335	0.039	0.650	0.866	500
19444291	Yellow	R 3/4-14"	1.392	0.472	0.079	0.906	1.063	250
19482971	Yellow	R 1"	1.516	0.461	0.079	0.760	1.260	250
19486101	Yellow	R 1"	1.752	0.461	0.079	0.850	1.260	250
19487931	Yellow	R 1-1/4"	2.100	0.490	0.079	0.874	1.417	200
19496021	Yellow	R 1-1/2"	2.362	0.591	0.079	0.984	1.417	150
19508841	Green	7/16-20 UNF	0.821	0.335	0.079	0.630	0.669	250
19510651	Green	7/16-20 UNF	0.821	0.453	0.079	0.764	0.669	250
19535441	Green	7/16-20 UNF	0.972	0.333	0.079	0.635	0.669	200
19536461	Green	1/2-20 UNF	0.661	0.451	0.039	0.754	0.472	250
19539651	Green	9/16-18 UNF	0.829	0.335	0.079	0.646	0.669	250
19552561	Green	9/16-18 UNF	0.829	0.453	0.079	0.757	0.669	250





TPC Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm						Packaging
		TH	D	H1	H2	H	SW	Carton quantity
		Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	
19556581	Green	9/16-18 UNF	24.10	11.30	2.00	19.00	17.00	200
19559191	Green	5/8-18 UNF	20.90	8.50	1.00	16.30	17.00	250
19564611	Green	3/4-16 UNF	28.50	10.60	2.00	18.20	22.00	500
19571631	Green	3/4-16 UNF	32.40	10.60	2.00	18.00	22.00	500
19582351	Green	7/8-14 UNF	28.80	12.00	2.00	19.70	22.00	500
19600011	Green	7/8-14 UNF	31.80	12.56	2.00	20.00	22.00	500
19610031	Green	1-1/16-12 UNF	31.50	11.30	2.00	18.90	27.00	100
19613121	Green	1-1/16-12 UNF	35.30	11.60	2.00	19.40	27.00	100
19613221	Green	1-1/16-12 UNF	37.85	11.40	2.00	19.40	27.00	250
19621591	Green	1-3/16-12 UNF	38.80	11.50	2.00	22.78	27.00	250
19625711	Green	1-3/16-12 UNF	38.80	15.80	2.00	26.90	27.00	250
19628711	Green	1-5/16-12 UNF	44.00	11.50	2.00	21.40	32.00	200
19631311	Green	1-7/16-12 UNF	53.80	11.70	2.00	21.70	36.00	200
19632081	Green	1-5/8-12 UNF	52.90	12.65	2.00	22.35	36.00	200
19637861	Green	1-7/8-12 UNF	62.30	15.33	2.00	24.78	40.40	100
19641841	Green	1-8 UNC	45.50	11.70	2.00	19.30	32.00	1000
Part Number	Colour	TH	D	H1	H2	H	SW	Carton quantity
		Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	
		Dimensions in mm						Packaging



TPC Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in inches						Packaging
		TH	D	H1	H2	H	SW	Carton quantity
		Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	
19556581	Green	9/16-18 UNF	0.949	0.445	0.079	0.748	0.669	200
19559191	Green	5/8-18 UNF	0.823	0.335	0.039	0.642	0.669	250
19564611	Green	3/4-16 UNF	1.122	0.417	0.079	0.717	0.866	500
19571631	Green	3/4-16 UNF	1.276	0.417	0.079	0.709	0.866	500
19582351	Green	7/8-14 UNF	1.134	0.472	0.079	0.776	0.866	500
19600011	Green	7/8-14 UNF	1.252	0.494	0.079	0.787	0.866	500
19610031	Green	1-1/16-12 UNF	1.240	0.445	0.079	0.744	1.063	100
19613121	Green	1-1/16-12 UNF	1.390	0.457	0.079	0.764	1.063	100
19613221	Green	1-1/16-12 UNF	1.490	0.449	0.079	0.764	1.063	250
19621591	Green	1-3/16-12 UNF	1.528	0.453	0.079	0.897	1.063	250
19625711	Green	1-3/16-12 UNF	1.528	0.622	0.079	1.059	1.063	250
19628711	Green	1-5/16-12 UNF	1.732	0.453	0.079	0.843	1.260	200
19631311	Green	1-7/16-12 UNF	2.118	0.461	0.079	0.854	1.417	200
19632081	Green	1-5/8-12 UNF	2.083	0.498	0.079	0.880	1.417	200
19637861	Green	1-7/8-12 UNF	2.453	0.604	0.079	0.976	1.591	100
19641841	Green	1-8 UNC	1.791	0.461	0.079	0.760	1.260	1000
Part Number	Colour	TH	D	H1	H2	H	SW	Carton quantity
		Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	
		Dimensions in inches						Packaging



TPV Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Streamlined Installation Threaded Plug

The TPV Series plug matches threaded ports and openings with precision and reliability. A snug and secure fit guards effectively against leakage, corrosion and contaminants including chemicals, dust and moisture. This precise protection is critical for sensitive components. Installation and removal are quick and easy, without specialist tools.

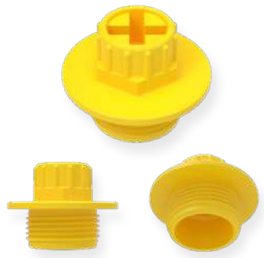

Material: Polyamide 6.6 (PA6.6)
Temperature Resistance: 149°**C** / 300°**F**

***Also available in a series that includes a gasket**

Yellow (-**YL**)
RAL 1021

Green (-**GN**)
RAL 6038

Red (-**RD**)
RAL 3000

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm					Packaging
		TH	D	H1	H	SW	Carton quantity
		Thread size	Flange diameter	Height	Overall height	Distance across flats	
19176591	Red	M12 x 1.5	21.00	11.50	25.00	17.00	250
19227961	Red	M16 x 1.5	22.00	11.50	25.00	17.00	250
19257681	Red	M18 x 1.5	24.70	11.50	25.00	17.00	250
19335031	Red	M18 x 1.5	28.00	11.50	25.00	17.00	250
19395431	Red	M22 x 1.5	33.00	11.50	25.00	17.00	200
19444171	Red	M27 x 2	39.00	11.50	25.00	17.00	200
19459541	Red	M32 x 1.5	38.50	11.50	25.00	17.00	200
19549161	Red	M33 x 2	45.00	11.50	25.00	17.00	150
19573391	Yellow	R 1/4"	19.00	11.50	25.00	17.00	250
19609841	Yellow	R 3/8"	25.00	11.50	25.00	17.00	150
19721991	Yellow	R 1/2"	30.00	11.50	25.00	17.00	250
19723061	Yellow	R 3/4"	35.00	11.50	25.00	17.00	200
19737781	Yellow	R 1"	44.00	11.50	25.00	17.00	150
19739851	Yellow	R 2"	74.00	11.50	25.00	17.00	100
19760681	Green	7/16-20 UNF	20.50	11.50	25.00	17.00	250
19793091	Green	5/8-18 UNF	24.50	11.50	25.00	17.00	250
19820081	Green	3/4-16 UNF	29.50	11.50	25.00	17.00	250
19868021	Green	7/8-14 UNF	33.50	11.50	25.00	17.00	200
19898391	Green	1-14 UNF	40.50	11.50	25.00	17.00	150
19985641	Green	1-5/16-12 UNF	48.00	11.50	25.00	17.00	100

Part Number	Colour	TH	D	H1	H	SW	Carton quantity
		Thread size	Flange diameter	Height	Overall height	Distance across flats	
		Dimensions in mm					Packaging

TPV Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88





*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in inches					Packaging
		TH	D	H1	H	SW	Carton quantity
		Thread size	Flange diameter	Height	Overall height	Distance across flats	
19176591	Red	M12 x 1.5	0.827	0.453	0.984	0.669	250
19227961	Red	M16 x 1.5	0.866	0.453	0.984	0.669	250
19257681	Red	M18 x 1.5	0.972	0.453	0.984	0.669	250
19335031	Red	M18 x 1.5	1.102	0.453	0.984	0.669	250
19395431	Red	M22 x 1.5	1.299	0.453	0.984	0.669	200
19444171	Red	M27 x 2	1.535	0.453	0.984	0.669	200
19459541	Red	M32 x 1.5	1.516	0.453	0.984	0.669	200
19549161	Red	M33 x 2	1.772	0.453	0.984	0.669	150
19573391	Yellow	R 1/4"	0.748	0.453	0.984	0.669	250
19609841	Yellow	R 3/8"	0.984	0.453	0.984	0.669	150
19721991	Yellow	R 1/2"	1.181	0.453	0.984	0.669	250
19723061	Yellow	R 3/4"	1.378	0.453	0.984	0.669	200
19737781	Yellow	R 1"	1.732	0.453	0.984	0.669	150
19739851	Yellow	R 2"	2.913	0.453	0.984	0.669	100
19760681	Green	7/16-20 UNF	0.807	0.453	0.984	0.669	250
19793091	Green	5/8-18 UNF	0.965	0.453	0.984	0.669	250
19820081	Green	3/4-16 UNF	1.161	0.453	0.984	0.669	250
19868021	Green	7/8-14 UNF	1.319	0.453	0.984	0.669	200
19898391	Green	1-14 UNF	1.594	0.453	0.984	0.669	150
19985641	Green	1-5/16-12 UNF	1.890	0.453	0.984	0.669	100

Part Number	Colour	TH	D	H1	H	SW	Carton quantity
		Thread size	Flange diameter	Height	Overall height	Distance across flats	
		Dimensions in inches					Packaging

TPW Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Streamlined Installation Threaded Plug with Gasket

The TPW Series plug is designed to include a gasket that conforms closely to the component surface to create an air and watertight seal. Robust resistance covers several factors, including UV radiation, ozone, chemicals and wear and tear. The gasket helps dampen vibration and reduce noise, for enhanced comfort of protected equipment operators.

Material: Polyamide 6.6 (PA6.6)
Gasket: Thermoplastic Elastomer (TPE)
Temperature Resistance: 149°**C** / 300°**F**

***Also available as a series without a gasket**

Yellow (-**YL**)
RAL 1021

Green (-**GN**)
RAL 6038

Red (-**RD**)
RAL 3000

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm						Packaging
		TH	D	H1	H2	H	SW	
		Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	Carton quantity
19177451	Red	M12 x 1.5	21.00	11.50	2.00	25.00	17.00	250
19230611	Red	M16 x 1.5	22.00	11.50	2.00	25.00	17.00	250
19376601	Red	M18 x 1.5	24.70	11.50	2.00	25.00	17.00	250
19409611	Red	M18 x 1.5	28.00	11.50	2.00	25.00	17.00	250
19454611	Red	M22 x 1.5	33.00	11.50	2.00	25.00	17.00	200
19521881	Red	M27 x 2	39.00	11.50	2.00	25.00	17.00	200
19556161	Red	M32 x 1.5	38.50	11.50	2.00	25.00	17.00	200
19558291	Red	M33 x 2	45.00	11.50	2.00	25.00	17.00	150
19593761	Yellow	R 1/4"	19.00	11.50	2.00	25.00	17.00	250
19600701	Yellow	R 3/8"	25.00	11.50	2.00	25.00	17.00	150
19606721	Yellow	R 1/2"	30.00	11.50	2.00	25.00	17.00	250
19686991	Yellow	R 3/4"	35.00	11.50	2.00	25.00	17.00	200
19747591	Yellow	R 1"	44.00	11.50	2.00	25.00	17.00	150
19837851	Yellow	R 2"	74.00	11.50	2.00	25.00	17.00	100
19887671	Green	7/16-20 UNF	20.50	11.50	2.00	25.00	17.00	250
19891861	Green	5/8-18 UNF	24.50	11.50	2.00	25.00	17.00	250
19893091	Green	3/4-16 UNF	29.50	11.50	2.00	25.00	17.00	250
19898501	Green	7/8-14 UNF	33.50	11.50	2.00	25.00	17.00	200
19932431	Green	1-14 UNF	40.50	11.50	2.00	25.00	17.00	150
19982411	Green	1-5/16-12 UNF	48.00	11.50	2.00	25.00	17.00	100
Part Number	Colour	TH	D	H1	H2	H	SW	Carton quantity
		Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	
		Dimensions in mm						Packaging

TPW Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in inches						Packaging
		TH	D	H1	H2	H	SW	
		Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	Carton quantity
19177451	Red	M12 x 1.5	0.827	0.453	0.079	0.984	0.669	250
19230611	Red	M16 x 1.5	0.866	0.453	0.079	0.984	0.669	250
19376601	Red	M18 x 1.5	0.972	0.453	0.079	0.984	0.669	250
19409611	Red	M18 x 1.5	1.102	0.453	0.079	0.984	0.669	250
19454611	Red	M22 x 1.5	1.299	0.453	0.079	0.984	0.669	200
19521881	Red	M27 x 2	1.535	0.453	0.079	0.984	0.669	200
19556161	Red	M32 x 1.5	1.516	0.453	0.079	0.984	0.669	200
19558291	Red	M33 x 2	1.772	0.453	0.079	0.984	0.669	150
19593761	Yellow	R 1/4"	0.748	0.453	0.079	0.984	0.669	250
19600701	Yellow	R 3/8"	0.984	0.453	0.079	0.984	0.669	150
19606721	Yellow	R 1/2"	1.181	0.453	0.079	0.984	0.669	250
19686991	Yellow	R 3/4"	1.378	0.453	0.079	0.984	0.669	200
19747591	Yellow	R 1"	1.732	0.453	0.079	0.984	0.669	150
19837851	Yellow	R 2"	2.913	0.453	0.079	0.984	0.669	100
19887671	Green	7/16-20 UNF	0.807	0.453	0.079	0.984	0.669	250
19891861	Green	5/8-18 UNF	0.965	0.453	0.079	0.984	0.669	250
19893091	Green	3/4-16 UNF	1.161	0.453	0.079	0.984	0.669	250
19898501	Green	7/8-14 UNF	1.319	0.453	0.079	0.984	0.669	200
19932431	Green	1-14 UNF	1.594	0.453	0.079	0.984	0.669	150
19982411	Green	1-5/16-12 UNF	1.890	0.453	0.079	0.984	0.669	100
Part Number	Colour	TH	D	H1	H2	H	SW	Carton quantity
		Thread size	Flange diameter	Height	Height of gasket	Overall height	Distance across flats	
		Dimensions in inches						Packaging

SL1 Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Screw Plug

The SL1 Series plug is precision designed for easy and close insertion into threaded holes. An airtight seal provides robust protection against contaminants, without component damage. Quick application and removal are easily enabled by applying torque, while durable construction withstands repeated mechanical stresses and higher temperatures.

Material: Polypropylene (PP)
Temperature Resistance: 149°**C** / 300°**F**

***Multiple tools can be used to close this plug**

Red (-**RD**)
RAL 3000

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm					Packaging
	TH	H1	H	D	SW	Quantity per bag
	Thread size	Height	Handle height	Flange diameter	Distance across flats	
19165514	M14 x 1.5	9.00	6.00	18.70	10.00	1000
19838604	M16 x 1.5	9.00	6.00	21.70	13.00	1000
19893294	G 1/4	10.00	6.00	10.00	10.00	1000

Part Number	TH	H1	H	D	SW	Quantity per bag
	Thread size	Height	Handle height	Flange diameter	Distance across flats	
	Dimensions in mm					Packaging

SL1 Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches					Packaging
	TH	H1	H	D	SW	Quantity per bag
	Thread size	Height	Handle height	Flange diameter	Distance across flats	
19165514	M14 x 1.5	0.354	0.236	0.736	0.394	1000
19838604	M16 x 1.5	0.354	0.236	0.854	0.512	1000
19893294	G 1/4	0.394	0.236	0.394	0.394	1000

Part Number	TH	H1	H	D	SW	Quantity per bag
	Thread size	Height	Handle height	Flange diameter	Distance across flats	
	Dimensions in inches					Packaging

SL2 Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Ribbed Screw Plug

The SL2 Series plug incorporates a ribbed design to closely interlock with protected component thread grooves and resist pressure variations, or unwanted dislodgement. The ribbed surface enables additional grip for situations where lubricants may make surfaces slippery. Robust construction resists contaminant entry and temperature variations.

Material: Polypropylene (PP)
Temperature Resistance: 149°**C** / 300°**F**

***Multiple tools can be used to close this plug**

Red (-**RD**)
RAL 3000

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm					Packaging
	TH	H1	H	D	SW	Quantity per bag
	Thread size	Height	Handle height	Flange diameter	Distance across flats	
19420764	M10 x 1	8.00	6.00	14.50	13.00	1000
19816894	G 1/8	8.00	6.00	14.50	13.00	1000
Part Number	TH	H1	H	D	SW	Quantity per bag
	Thread size	Height	Handle height	Flange diameter	Distance across flats	
	Dimensions in mm					Packaging

SL2 Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches					Packaging
	TH	H1	H	D	SW	Quantity per bag
	Thread size	Height	Handle height	Flange diameter	Distance across flats	
19420764	M10 x 1	0.315	0.236	0.571	0.512	1000
19816894	G 1/8	0.315	0.236	0.571	0.512	1000
Part Number	TH	H1	H	D	SW	Quantity per bag
	Thread size	Height	Handle height	Flange diameter	Distance across flats	
	Dimensions in inches					Packaging



SK1 Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Compact Plug

The SK1 Series compact stopper provides a versatile short length yet highly secure sealing solution for confined spaces. Precision engineering enables a snug fit, maximising component protection within limited insertion depth and minimising accidental snagging. Durable construction prevents contaminant entry to maintain sensitive systems integrity.

Material: Polypropylene (PP)
Temperature Resistance: 149°**C** / 300°**F**

***Multiple tools can be used to close this plug**

Red (-**RD**)
RAL 3000

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm					Packaging
	TH	H1	H	D	SW	Quantity per bag
	Thread size	Height	Handle height	Flange diameter	Distance across flats	
19314864	M14 x 1.5	6.00	6.00	18.70	10.00	1000
19322304	M16 x 1.5	6.50	6.00	21.70	13.00	1000
19507064	M18 x 1.5	7.00	6.00	23.70	13.00	1000

Part Number	TH	H1	H	D	SW	Quantity per bag
	Thread size	Height	Handle height	Flange diameter	Distance across flats	
	Dimensions in mm					Packaging

SK1 Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches					Packaging
	TH	H1	H	D	SW	Quantity per bag
	Thread size	Height	Handle height	Flange diameter	Distance across flats	
19314864	M14 x 1.5	0.236	0.236	0.736	0.394	1000
19322304	M16 x 1.5	0.256	0.236	0.854	0.512	1000
19507064	M18 x 1.5	0.276	0.236	0.933	0.512	1000

Part Number	TH	H1	H	D	SW	Quantity per bag
	Thread size	Height	Handle height	Flange diameter	Distance across flats	
	Dimensions in inches					Packaging



SK2 Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Compact Ribbed Plug

The SK2 Series stopper fits securely in situations when space-efficiency and strong grip are critical. The shortened thread aligns precisely with shallow port depths and the ribbed construction engages robustly to provide greater resistance to loosening from vibrations. Multiple contact points enhance seal quality and contaminant protection.

Material: Polypropylene (PP)
Temperature Resistance: 149°**C** / 300°**F**

***Multiple tools can be used to close this plug**

Red (-**RD**)
RAL 3000

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm					Packaging
	TH	H1	H	D	SW	Quantity per bag
	Thread size	Height	Handle height	Flange diameter	Distance across flats	
19874134	M10 x 1	4.00	6.00	14.50	13.00	1000
Part Number	TH	H1	H	D	SW	Quantity per bag
	Thread size	Height	Handle height	Flange diameter	Distance across flats	
	Dimensions in mm					Packaging

SK2 Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches					Packaging
	TH	H1	H	D	SW	Quantity per bag
	Thread size	Height	Handle height	Flange diameter	Distance across flats	
19874134	M10 x 1	0.157	0.236	0.571	0.512	1000
Part Number	TH	H1	H	D	SW	Quantity per bag
	Thread size	Height	Handle height	Flange diameter	Distance across flats	
	Dimensions in inches					Packaging

SR Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Ridged Screw Plug

The SR Series stopper provides compact pressure and temperature resistant sealing of threaded assemblies. Unique concentric ridge design increases surface contact, providing tactile operator feedback to indicate full plug seating. The resulting snug fit resists dislodgement while maintaining full functionality when exposed to lubricants or coolants.

Material: PA6
Temperature Resistance: 149°**C** / 300°**F**

***A number of different materials are available**

Clear (-**CL**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm						Packaging
	TH	d	H1	D	H	SW	Quantity per bag
	Thread size	Inside diameter	Height	Flange diameter	Overall height	Distance across flats	
19254034	G 1/8	8.00	7.00	13.00	15.20	9.00	2500
19379924	G 1/4	10.00	7.00	16.00	15.00	11.10	2500
19513494	G 3/8	12.00	8.00	21.00	18.00	14.00	2500
19664114	G 1/2	14.00	9.00	27.00	19.00	14.00	1000
19761114	G 3/4	16.00	11.00	34.00	21.00	17.00	1000
19871284	G 1	16.00	11.00	41.00	21.00	19.00	1000
19896304	G 1-1/4	18.00	11.00	53.00	21.80	24.00	1000

Part Number	TH	d	H1	D	H	SW	Quantity per bag
	Thread size	Inside diameter	Height	Flange diameter	Overall height	Distance across flats	
	Dimensions in mm						Packaging

SR Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**





Part Number	Dimensions in inches					Packaging
	TH	d	H1	D	SW	Quantity per bag
	Thread size	Inside diameter	Height	Flange diameter	Distance across flats	
19254034	G 1/8	0.315	0.276	0.512	0.354	2500
19379924	G 1/4	0.394	0.276	0.630	0.437	2500
19513494	G 3/8	0.472	0.315	0.827	0.551	2500
19664114	G 1/2	0.551	0.354	1.063	0.551	1000
19761114	G 3/4	0.630	0.433	1.339	0.669	1000
19871284	G 1	0.630	0.433	1.614	0.748	1000
19896304	G 1-1/4	0.709	0.433	2.087	0.945	1000

Part Number	TH	d	H1	D	SW	Quantity per bag
	Thread size	Inside diameter	Height	Flange diameter	Distance across flats	
	Dimensions in inches					Packaging

PEP Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Tethered Plug

The PEP Series plug is engineered to provide a secure fit for threaded ports where precision protection of internal components is critical. The design ensures close engagement with corresponding threads for an effective barrier against contaminants or particulates. A built-in tether reduces risk of displacement during routine handling.

Material: Polyethylene (PE)
Temperature Resistance: 66°**C** / 150°**F**

***Two-piece design allows the threaded area to turn without moving the tether**

Red (**-RD**)
RAL 3000

Black (**-BK**)
RAL 9017

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm				Packaging
	TH	H	d2	L	Carton quantity
	Thread size	Height	Inside diameter	Centres	
19226691	M24 x 2	17.50	20.20	100.00	400
19417591	M28 x 2	18.50	20.20	100.00	400
19463851	M28 x 2	18.50	24.20	110.00	400
19592831	M36 x 2	21.00	24.20	110.00	200
19784611	M36 x 2	21.00	30.00	135.00	200
19981081	M42 x 2	20.50	37.50	200.00	200
Part Number	TH	H	d2	L	Carton quantity
	Thread size	Height	Inside diameter	Centres	
	Dimensions in mm				Packaging

PEP Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in inches				Packaging
	TH	H	d2	L	Carton quantity
	Thread size	Height	Inside diameter	Centres	
19226691	M24 x 2	0.689	0.795	3.937	400
19417591	M28 x 2	0.728	0.795	3.937	400
19463851	M28 x 2	0.728	0.953	4.331	400
19592831	M36 x 2	0.827	0.953	4.331	200
19784611	M36 x 2	0.827	1.181	5.315	200
19981081	M42 x 2	0.807	1.476	7.874	200
Part Number	TH	H	d2	L	Carton quantity
	Thread size	Height	Inside diameter	Centres	
	Dimensions in inches				Packaging



PD Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Fluid Line Plug

The PD Series plug is designed for protecting flared JIC fittings precisely and securely to maintain their integrity. A knurled exterior enhances grip, enabling hand-tightening for quick and easy tool-free fitting, streamlined operations and reduced down time. The cap is ideal when manual dexterity may be limited, for example by wearing gloves.

Material: See Table
Temperature Resistance: 66°**C** / 150°**F**

***Meets national aerospace standards NAS 833 and NAS 815**

Red (-**RD**)
RAL 3024

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

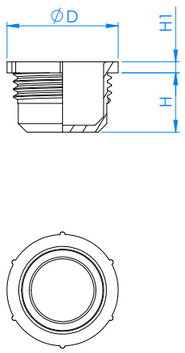

*For product quantities visit our website: **www.caplugs.eu**

Part Number	To fit tubing size	To fit thread size	NAS 833 Reference	Material	Dimensions in mm			Packaging	
					H	H1	D		
					Body height	Handle height	Outside diameter	Carton quantity	Mini pack quantity
42104351	1/8	5/16-24	NAS 833-2	LDPE	10.41	4.57	11.18	5000	1000
42116721	3/16	3/8-24	NAS 833-3	LDPE	11.68	4.57	12.70	5000	1000
42124521	3/16	3/8-24		HDPE	11.68	4.57	12.70	5000	1000
42126181	1/4	7/16-20	NAS 833-4	LDPE	13.46	4.83	15.75	5000	1000
42127691	1/4	7/16-20		HDPE	13.46	4.83	15.75	5000	1000
42149031	5/16	1/2-20	NAS 833-5	LDPE	13.46	6.35	17.27	5000	1000
42152501	5/16	1/2-20		HDPE	13.46	6.35	17.27	5000	1000
42170911	3/8	9/16-18	NAS 833-6	LDPE	12.70	6.35	20.57	5000	1000
42178761	3/8	9/16-18		HDPE	12.70	6.35	20.57	5000	1000
42227061	3/8	5/8-18		LDPE	14.99	6.35	20.57	5000	1000
42244131	3/8	5/8-18		HDPE	14.99	6.35	20.57	5000	1000
42251841	1/2	3/4-16	NAS 833-8	LDPE	19.05	6.35	23.88	2500	500
42260761	1/2	3/4-16		HDPE	19.05	6.35	23.88	2500	500
42267121	5/8	7/8-14	NAS 833-10	LDPE	22.10	6.35	26.92	2500	500
42276771	5/8	7/8-14		HDPE	22.10	6.35	26.92	2500	500
42277791		1-12		LDPE	21.34	6.35	28.45	2500	500
42314611		1-12		HDPE	21.34	6.35	28.45	2500	500
42319711	3/4	1-1/16-12		LDPE	21.84	6.35	35.81	1500	300
42329501	3/4	1-1/16-12		HDPE	21.84	6.35	35.81	1500	300
42362791		1-1/16-12	NAS 833-12	LDPE	22.61	6.35	31.75	2500	300
42362841	3/4	1-1/16-14		LDPE	28.45	6.35	33.27	1000	200
42364941	3/4	1-1/16-14		HDPE	28.45	6.35	33.27	1000	200

9001
ISO certification

14001
ISO certification

16949
IATF certification

PD Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For product quantities visit our website: **www.caplugs.eu**

Part Number	To fit tubing size	To fit thread size	NAS 833 Reference	Material	Dimensions in inches			Packaging	
					H	H1	D		
					Body height	Handle height	Outside diameter	Carton quantity	Mini pack quantity
42104351	1/8	5/16-24	NAS 833-2	LDPE	0.41	0.18	0.44	5000	1000
42116721	3/16	3/8-24	NAS 833-3	LDPE	0.46	0.18	0.50	5000	1000
42124521	3/16	3/8-24		HDPE	0.46	0.18	0.50	5000	1000
42126181	1/4	7/16-20	NAS 833-4	LDPE	0.53	0.19	0.62	5000	1000
42127691	1/4	7/16-20		HDPE	0.53	0.19	0.62	5000	1000
42149031	5/16	1/2-20	NAS 833-5	LDPE	0.53	0.25	0.68	5000	1000
42152501	5/16	1/2-20		HDPE	0.53	0.25	0.68	5000	1000
42170911	3/8	9/16-18	NAS 833-6	LDPE	0.50	0.25	0.81	5000	1000
42178761	3/8	9/16-18		HDPE	0.50	0.25	0.81	5000	1000
42227061	3/8	5/8-18		LDPE	0.59	0.25	0.81	5000	1000
42244131	3/8	5/8-18		HDPE	0.59	0.25	0.81	5000	1000
42251841	1/2	3/4-16	NAS 833-8	LDPE	0.75	0.25	0.94	2500	500
42260761	1/2	3/4-16		HDPE	0.75	0.25	0.94	2500	500
42267121	5/8	7/8-14	NAS 833-10	LDPE	0.87	0.25	1.06	2500	500
42276771	5/8	7/8-14		HDPE	0.87	0.25	1.06	2500	500
42277791		1-12		LDPE	0.84	0.25	1.12	2500	500
42314611		1-12		HDPE	0.84	0.25	1.12	2500	500
42319711	3/4	1-1/16-12		LDPE	0.86	0.25	1.41	1500	300
42329501	3/4	1-1/16-12		HDPE	0.86	0.25	1.41	1500	300
42362791		1-1/16-12	NAS 833-12	LDPE	0.89	0.25	1.25	2500	300
42362841	3/4	1-1/16-14		LDPE	1.12	0.25	1.31	1000	200
42364941	3/4	1-1/16-14		HDPE	1.12	0.25	1.31	1000	200



9001
ISO certification

14001
ISO certification

16949
IATF certification

PD Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For product quantities visit our website: **www.caplugs.eu**

Part Number	To fit tubing size	To fit thread size	NAS 833 Reference	Material	Dimensions in mm			Packaging	
					H	H1	D		
					Body height	Handle height	Outside diameter	Carton quantity	Mini pack quantity
42379201	3/4	1-1/16-14		LDPE	21.84	6.35	35.81	1500	300
42383641	3/4	1-1/16-14		HDPE	21.84	6.35	35.81	1500	300
42384301	7/8	1-3/16-12		LDPE	23.62	6.35	38.10	1200	240
42420211	7/8	1-3/16-12		HDPE	23.62	6.35	38.10	1200	240
42425131	1	1-5/16-12		LDPE	23.62	6.35	38.10	1000	200
42441661	1	1-5/16-12		HDPE	23.62	6.35	38.10	1000	200
42454971		1-1/2-12		LDPE	23.62	6.35	44.45	1000	200
42461551		1-1/2-12		HDPE	23.62	6.35	44.45	1000	200
42466821	1-1/4	1-5/8-12		LDPE	23.88	8.64	56.39	500	100
42483981	1-1/4	1-5/8-12		HDPE	23.88	8.64	56.39	500	100
42492631		1-3/4-12		LDPE	24.64	8.64	58.67	500	100
42494551		1-3/4-12		HDPE	24.64	8.64	58.67	500	100
42498661	1-1/2	1-7/8-12	NAS 833-24	LDPE	29.21	7.87	58.67	500	100
42509351	1-1/2	1-7/8-12		HDPE	29.21	7.87	58.67	500	100
42536841	1-1/2	1-7/8-12		LDPE	26.92	9.65	62.74	500	100
42546721	1-1/2	1-7/8-12		HDPE	26.92	9.65	62.74	500	100
42557381	1-3/4	2-1/4-12		LDPE	33.27	9.65	69.85	250	50
42567431	1-3/4	2-1/4-12		HDPE	33.27	9.65	69.85	250	50
42585091	2	2-1/2-12		LDPE	33.27	9.65	78.49	225	45
42589581	2	2-1/2-12		HDPE	33.27	9.65	78.49	225	45
Part Number	To fit tubing size	To fit thread size	NAS 833 Reference	Material	H	H1	D	Carton quantity	Mini pack quantity
					Body height	Handle height	Outside diameter		
					Dimensions in mm			Packaging	





9001
ISO certification

14001
ISO certification

16949
IATF certification

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

PD Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For product quantities visit our website: **www.caplugs.eu**

Part Num-ber	To fit tubing size	To fit thread size	NAS 833 Reference	Material	Dimensions in inches			Packaging	
					H	H1	D		
					Body height	Handle height	Outside diameter	Carton quantity	Mini pack quantity
42379201	3/4	1-1/16-14		LDPE	0.86	0.25	1.41	1500	300
42383641	3/4	1-1/16-14		HDPE	0.86	0.25	1.41	1500	300
42384301	7/8	1-3/16-12		LDPE	0.93	0.25	1.50	1200	240
42420211	7/8	1-3/16-12		HDPE	0.93	0.25	1.50	1200	240
42425131	1	1-5/16-12		LDPE	0.93	0.25	1.50	1000	200
42441661	1	1-5/16-12		HDPE	0.93	0.25	1.50	1000	200
42454971		1-1/2-12		LDPE	0.93	0.25	1.75	1000	200
42461551		1-1/2-12		HDPE	0.93	0.25	1.75	1000	200
42466821	1-1/4	1-5/8-12		LDPE	0.94	0.34	2.22	500	100
42483981	1-1/4	1-5/8-12		HDPE	0.94	0.34	2.22	500	100
42492631		1-3/4-12		LDPE	0.97	0.34	2.31	500	100
42494551		1-3/4-12		HDPE	0.97	0.34	2.31	500	100
42498661	1-1/2	1-7/8-12	NAS 833-24	LDPE	1.15	0.31	2.31	500	100
42509351	1-1/2	1-7/8-12		HDPE	1.15	0.31	2.31	500	100
42536841	1-1/2	1-7/8-12		LDPE	1.06	0.38	2.47	500	100
42546721	1-1/2	1-7/8-12		HDPE	1.06	0.38	2.47	500	100
42557381	1-3/4	2-1/4-12		LDPE	1.31	0.38	2.75	250	50
42567431	1-3/4	2-1/4-12		HDPE	1.31	0.38	2.75	250	50
42585091	2	2-1/2-12		LDPE	1.31	0.38	3.09	225	45
42589581	2	2-1/2-12		HDPE	1.31	0.38	3.09	225	45
Part Num-ber	To fit tubing size	To fit thread size	NAS 833 Reference	Material	H	H1	D	Carton quantity	Mini pack quantity
					Body height	Handle height	Outside diameter		
					Dimensions in inches			Packaging	





9001
ISO certification

14001
ISO certification

16949
IATF certification

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

ASP Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Leak Proof Plug

The ASP Series plug protects straight-threaded ports and 37° flared fittings. The nose section's leak-proof design is engineered to ensure a secure and durable fit that eliminates the need for a gasket. Strong and corrosion and contaminants resistant the cap maintains connection integrity, especially important for hydraulic systems and fuel lines.

Material: Aluminium (Al)
Temperature Resistance: Not applicable.

***Can also be supplied with a rubber seal**

Aluminum (-**AL**)
RAL 9006

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For product quantities visit our website: **www.caplugs.eu**

Part Number	To fit thread size	NAS 836 Reference	Dimensions in mm			Packaging	
			H	H1	D		
			Overall height	Body height	Outside Diameter	Carton quantity	Mini pack quantity
42919581	3/8-24	NAS 836-3	15.49	9.40	14.48	4500	1000
42217431	7/16-20	NAS 836-4	18.03	11.68	15.49	5000	1000
42319551	1/2-20	NAS 836-5	17.78	11.94	17.78	5000	1000
42332081	9/16-18	NAS 836-6	19.56	12.70	19.30	5000	1000
42495491	5/8-18	NAS 836-7	19.81	12.70	22.86	5000	1000
42531741	3/4-16	NAS 836-8	22.86	15.49	23.88	4000	800
42617811	7/8-14	NAS 836-10	24.13	17.78	28.19	3000	500
42688691	1-1/16-12	NAS 836-12	25.15	16.51	35.05	1700	500
42730921	1-5/16-12	NAS 836-16	27.43	18.03	38.86	1150	200
42967941	1-7/8-12	NAS 836-24	31.50	22.35	63.50	400	80

9001
ISO certification

ASP Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For product quantities visit our website: **www.caplugs.eu**



Part Number	To fit thread size	NAS 836 Reference	Dimensions in inches			Packaging	
			H	H1	D		
			Overall Height	Body height	Outside Diameter	Carton quantity	Mini pack quantity
42919581	3/8-24	NAS 836-3	0.61	0.37	0.57	4500	1000
42217431	7/16-20	NAS 836-4	0.71	0.46	0.61	5000	1000
42319551	1/2-20	NAS 836-5	0.70	0.47	0.70	5000	1000
42332081	9/16-18	NAS 836-6	0.77	0.50	0.76	5000	1000
42495491	5/8-18	NAS 836-7	0.78	0.50	0.90	5000	1000
42531741	3/4-16	NAS 836-8	0.90	0.61	0.94	4000	800
42617811	7/8-14	NAS 836-10	0.95	0.70	1.11	3000	500
42688691	1-1/16-12	NAS 836-12	0.99	0.65	1.38	1700	500
42730921	1-5/16-12	NAS 836-16	1.08	0.71	1.53	1150	200
42967941	1-7/8-12	NAS 836-24	1.24	0.88	2.50	400	80

9001
ISO certification

ADP Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Lightweight Plug

The ADP Series threaded plug fits securely into corresponding threaded assemblies. The resulting seal provides robust leak protection to maintain systems integrity. Lightweight construction is strong without adding significant extra mass, and corrosion resistance is excellent. The plug is easy to install and remove and durable at high temperatures.



Material: Aluminium (Al)
Temperature Resistance: Not applicable.

***Can also be supplied with a rubber seal**

Aluminum (-**AL**)
RAL 7006

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	To fit tube size	To fit thread size	NAS 842 Reference	Dimensions in mm			Packaging	
				H	H1	D	Carton quantity	Mini pack quantity
				Overall height	Body height	Outside diameter		
42159571	5/32	5/16-24	NAS 842-2	13.21	8.64	11.94	5500	1000
42278991	3/16	3/8-24	NAS 842-3	13.21	7.11	14.48	5000	1000
42286701	1/4	7/16-20	NAS 842-4	13.72	7.37	15.49	7000	1000
42385301	5/16	1/2-20	NAS 842-5	13.97	8.13	17.78	5500	1000
42443121	3/8	9/16-18	NAS 842-6	15.24	8.38	19.30	4000	1000
42474381	7/16	5/8-18	NAS 842-7	14.99	7.87	22.86	5000	1000
42477611	1/2	3/4-16	NAS 842-8	18.29	10.92	23.88	4700	800
42477721	5/8	7/8-14	NAS 842-10	18.80	12.45	28.19	3500	500
42551821	3/4	1-1/16-12	NAS 842-12	20.57	11.94	35.05	1500	500
42598411	1	1-5/16-12	NAS 842-16	20.83	11.43	38.86	1200	200
42936821	1-1/2	1-7/8-12	NAS 842-24	23.62	15.24	63.50	500	100

Part Number	To fit tube size	To fit thread size	NAS 842 Reference	H	H1	D	Carton quantity	Mini pack quantity
				Overall height	Body height	Outside diameter		
				Dimensions in mm			Packaging	

9001
ISO certification

ADP Series

Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**



Part Number	To fit tube size	To fit thread size	NAS 842 Reference	Dimensions in inches			Packaging	
				H	H1	D	Carton quantity	Mini pack quantity
				Overall height	Body height	Outside diameter		
42159571	5/32	5/16-24	NAS 842-2	0.52	0.34	0.470	5500	1000
42278991	3/16	3/8-24	NAS 842-3	0.52	0.28	0.570	5000	1000
42286701	1/4	7/16-20	NAS 842-4	0.54	0.29	0.610	7000	1000
42385301	5/16	1/2-20	NAS 842-5	0.55	0.32	0.700	5500	1000
42443121	3/8	9/16-18	NAS 842-6	0.60	0.33	0.760	4000	1000
42474381	7/16	5/8-18	NAS 842-7	0.59	0.31	0.900	5000	1000
42477611	1/2	3/4-16	NAS 842-8	0.72	0.43	0.940	4700	800
42477721	5/8	7/8-14	NAS 842-10	0.74	0.49	1.110	3500	500
42551821	3/4	1-1/16-12	NAS 842-12	0.81	0.47	1.380	1500	500
42598411	1	1-5/16-12	NAS 842-16	0.82	0.45	1.530	1200	200
42936821	1-1/2	1-7/8-12	NAS 842-24	0.93	0.60	2.500	500	100

Part Number	To fit tube size	To fit thread size	NAS 842 Reference	H	H1	D	Carton quantity	Mini pack quantity
				Overall height	Body height	Outside diameter		
				Dimensions in inches			Packaging	

9001
ISO certification

Masking Caps

When Precision Protection is Critical

Caplugs masking caps are specially developed to provide surface protection during painting, coating, or blasting. Precision coverage and guarding of designated areas ensures clean lines and prevents unwanted material accumulation, while a precise fit over component ends creates a secure seal against contamination.

These caps offer designs that facilitate quick application and removal where efficiency and precision are demanded. Ease of use enables rapid adjustments and swift transitions between tasks, minimising downtime and enhancing productivity.

Each cap's robust, stress-resistant masking enables the refined quality and consistent performance of products in sectors such as automotive refinishing, electronics manufacturing, and aerospace component preparation, where intricate detailing and flawless surface integrity are essential.

More details about these products on our website

SC-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Flexible Push-On Cap

The SC-SH Series cap masks plain and threaded studs, tube ends, and slotted holes, to ensure a clean precision finish right to the edge of the masked area. Highly rugged and flexible, the cap adapts to mask components that are bigger than its original size. Heat resistant for high temperature applications, durability enables reuse multiple times.

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Available in low temperature applications materials**

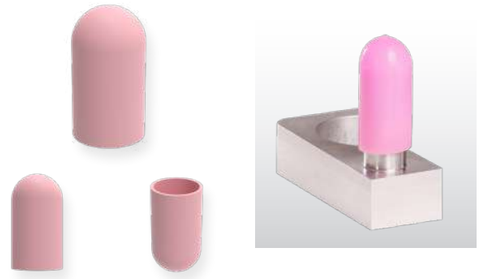

Also available in: Black (-**BK**) RAL 9005, White (-**WT**) RAL 9016

Pink (-**PK**) RAL 3015

Yellow (-**YL**) RAL 1016

Blue (-**BL**) RAL 5024

Green (-**GN**) RAL 6024

Orange (-**OR**) RAL 2008

Clear (-**CL**) RAL 9003

Grey (-**GY**) RAL 7031

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial threads	Colour	Dimensions in mm			Packaging
				d	D	h	
				Inside diameter	Outside diameter	Inside height	Quantity per bag
15106474			Clear	0.51	2.54	12.70	1000
15107244			Clear	0.94	2.54	12.70	1000
15114034			Clear	1.02	3.56	19.05	1000
15114274		1-64 UNC, 1-72 UNF	Blue	1.57	4.75	25.40	1000
15116914		1-64 UNC, 1-72 UNF	Clear	1.58	4.75	19.05	1000
15120864	M2	2-56 UNC, 2-64 UNF	Clear	1.78	4.32	25.40	1000
15121844			Clear	2.03	5.21	19.05	1000
15123354		3-48 UNC, 3-56 UNF	Grey	2.36	4.95	12.70	1000
15125364		3-48 UNC, 3-56 UNF	Pink	2.36	4.95	19.05	1000
15126544		3-48 UNC, 3-56 UNF	Clear	2.36	4.95	19.05	1000
15127994		3-48 UNC, 3-56 UNF	White	2.36	4.95	25.40	1000
15132284	M3	4-40 UNC, 4-48 UNF	Blue	2.54	5.08	12.70	1000
15143754	M3	4-40 UNC, 4-48 UNF	Green	2.54	5.08	25.40	1000
15145334		5-40 UNC, 5-44 UNF	Yellow	2.77	5.46	12.70	1000
15148744		5-40 UNC, 5-44 UNF	Grey	2.77	5.46	19.05	1000
15155564		5-40 UNC, 5-44 UNF	Clear	2.77	5.46	19.05	1000
15157824		5-40 UNC, 5-44 UNF	White	2.77	5.46	25.40	1000
15159404		6-32 UNC, 6-40 UNF	Blue	3.18	6.35	12.70	1000
15161214		6-32 UNC, 6-40 UNF	Clear	3.18	6.35	12.70	1000
15166654		6-32 UNC, 6-40 UNF	Black	3.18	6.35	25.40	1000
15172334		6-32 UNC, 6-40 UNF	Clear	3.18	6.35	25.40	1000
15173764		6-32 UNC, 6-40 UNF	Clear	3.18	6.35	38.10	1000

9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information and build your order with precision and confidence.

SC-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial threads	Colour	Dimensions in inches			Packaging
				d	D	h	
				Inside diameter	Outside diameter	Inside height	Quantity per bag
15106474			Clear	0.020	0.100	0.500	1000
15107244			Clear	0.037	0.100	0.500	1000
15114034			Clear	0.040	0.140	0.750	1000
15114274		1-64 UNC, 1-72 UNF	Blue	0.062	0.187	1.000	1000
15116914		1-64 UNC, 1-72 UNF	Clear	0.062	0.187	0.750	1000
15120864	M2	2-56 UNC, 2-64 UNF	Clear	0.070	0.170	1.000	1000
15121844			Clear	0.080	0.205	0.750	1000
15123354		3-48 UNC, 3-56 UNF	Grey	0.093	0.195	0.500	1000
15125364		3-48 UNC, 3-56 UNF	Pink	0.093	0.195	0.750	1000
15126544		3-48 UNC, 3-56 UNF	Clear	0.093	0.195	0.750	1000
15127994		3-48 UNC, 3-56 UNF	White	0.093	0.195	1.000	1000
15132284	M3	4-40 UNC, 4-48 UNF	Blue	0.100	0.200	0.500	1000
15143754	M3	4-40 UNC, 4-48 UNF	Green	0.100	0.200	1.000	1000
15145334		5-40 UNC, 5-44 UNF	Yellow	0.109	0.215	0.500	1000
15148744		5-40 UNC, 5-44 UNF	Grey	0.109	0.215	0.750	1000
15155564		5-40 UNC, 5-44 UNF	Clear	0.109	0.215	0.750	1000
15157824		5-40 UNC, 5-44 UNF	White	0.109	0.215	1.000	1000
15159404		6-32 UNC, 6-40 UNF	Blue	0.125	0.250	0.500	1000
15161214		6-32 UNC, 6-40 UNF	Clear	0.125	0.250	0.500	1000
15166654		6-32 UNC, 6-40 UNF	Black	0.125	0.250	1.000	1000
15172334		6-32 UNC, 6-40 UNF	Clear	0.125	0.250	1.000	1000
15173764		6-32 UNC, 6-40 UNF	Clear	0.125	0.250	1.500	1000



9001
ISO certification

caplugs

Our engineering experts are ready to help you with fully customised solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

SC-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial threads	Colour	Dimensions in mm			Packaging
				d	D	h	
				Inside diameter	Outside diameter	Inside height	Quantity per bag
15174804			Clear	3.48	6.53	25.40	1000
15179924			Clear	3.56	6.73	12.70	1000
15184884			White	3.56	6.73	25.40	1000
15185274			Clear	3.56	6.73	25.40	1000
15185964	M4		Blue	3.76	6.10	12.70	1000
15187484	M4		Grey	3.76	6.10	19.05	1000
15188344	M4		Pink	3.76	6.10	25.40	1000
15189284		8-32 UNC, 8-36 UNF	Green	3.96	7.11	12.70	1000
15197094		8-32 UNC, 8-36 UNF	Yellow	3.96	7.11	25.40	1000
15200564		8-32 UNC, 8-36 UNF	Clear	3.96	7.11	31.75	1000
15205274			Black	4.17	7.42	25.40	1000
15205284		10-24 UNC, 10-32 UNF	Grey	4.37	7.62	12.70	1000
15210804		10-24 UNC, 10-32 UNF	Blue	4.37	7.62	25.40	1000
15212034		10-24 UNC, 10-32 UNF	Clear	4.37	7.62	25.40	1000
15212404		10-24 UNC, 10-32 UNF	Clear	4.37	7.62	38.10	1000
15217774	M5		Black	4.57	7.11	25.40	1000
15220764	M5		Clear	4.57	7.11	25.40	1000
15222614		12-24 UNC, 12-28 UNF	White	4.75	8.00	12.70	1000
15225444		12-24 UNC, 12-28 UNF	Blue	4.75	8.00	19.05	1000
15230524		12-24 UNC, 12-28 UNF	Clear	4.75	8.00	25.40	1000
15230564			Yellow	5.54	8.59	25.40	500
15232644	M6		Blue	5.66	8.76	12.70	500
15246144	M6		Black	5.66	8.76	25.40	500
15249594	M6		Pink	5.66	8.76	38.10	500
15254884	M6		Clear	5.66	8.76	38.10	500
15255904		1/4-20 UNC, 1/4-28 UNF	White	5.94	9.14	12.70	500
15268604		1/4-20 UNC, 1/4-28 UNF	Green	5.94	9.14	25.40	500
15271684		1/4-20 UNC, 1/4-28 UNF	Clear	5.94	9.14	25.40	500
15277224		1/4-20 UNC, 1/4-28 UNF	Yellow	5.94	9.14	38.10	500
15283114			Clear	6.34	9.65	12.70	500
15286404			Grey	6.35	9.65	25.40	500
15292994			Clear	6.35	9.65	25.40	500
15295874		5/16-18 UNC, 5/16-24 UNF	Yellow	7.14	10.16	12.70	500
15300834		5/16-18 UNC, 5/16-24 UNF	White	7.14	10.31	15.88	500
15301714		5/16-18 UNC, 5/16-24 UNF	Orange	7.14	10.31	19.05	500
15309454		5/16-18 UNC, 5/16-24 UNF	Blue	7.14	10.16	25.40	500
15309884		5/16-18 UNC, 5/16-24 UNF	Clear	7.14	10.16	25.40	500



9001
ISO certification

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

SC-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial threads	Colour	Dimensions in inches			Packaging
				d	D	h	
				Inside diameter	Outside diameter	Inside height	Quantity per bag
15174804			Clear	0.137	0.257	1.000	1000
15179924			Clear	0.140	0.265	0.500	1000
15184884			White	0.140	0.265	1.000	1000
15185274			Clear	0.140	0.265	1.000	1000
15185964	M4		Blue	0.148	0.240	0.500	1000
15187484	M4		Grey	0.148	0.240	0.750	1000
15188344	M4		Pink	0.148	0.240	1.000	1000
15189284		8-32 UNC, 8-36 UNF	Green	0.156	0.280	0.500	1000
15197094		8-32 UNC, 8-36 UNF	Yellow	0.156	0.280	1.000	1000
15200564		8-32 UNC, 8-36 UNF	Clear	0.156	0.280	1.250	1000
15205274			Black	0.164	0.292	1.000	1000
15205284		10-24 UNC, 10-32 UNF	Grey	0.172	0.300	0.500	1000
15210804		10-24 UNC, 10-32 UNF	Blue	0.172	0.300	1.000	1000
15212034		10-24 UNC, 10-32 UNF	Clear	0.172	0.300	1.000	1000
15212404		10-24 UNC, 10-32 UNF	Clear	0.172	0.300	1.500	1000
15217774	M5		Black	0.180	0.280	1.000	1000
15220764	M5		Clear	0.180	0.280	1.000	1000
15222614		12-24 UNC, 12-28 UNF	White	0.187	0.315	0.500	1000
15225444		12-24 UNC, 12-28 UNF	Blue	0.187	0.315	0.750	1000
15230524		12-24 UNC, 12-28 UNF	Clear	0.187	0.315	1.000	1000
15230564			Yellow	0.218	0.338	1.000	500
15232644	M6		Blue	0.223	0.345	0.500	500
15246144	M6		Black	0.223	0.345	1.000	500
15249594	M6		Pink	0.223	0.345	1.500	500
15254884	M6		Clear	0.223	0.345	1.500	500
15255904		1/4-20 UNC, 1/4-28 UNF	White	0.234	0.360	0.500	500
15268604		1/4-20 UNC, 1/4-28 UNF	Green	0.234	0.360	1.000	500
15271684		1/4-20 UNC, 1/4-28 UNF	Clear	0.234	0.360	1.000	500
15277224		1/4-20 UNC, 1/4-28 UNF	Yellow	0.234	0.360	1.500	500
15283114			Clear	0.250	0.380	0.500	500
15286404			Grey	0.250	0.380	1.000	500
15292994			Clear	0.250	0.380	1.000	500
15295874		5/16-18 UNC, 5/16-24 UNF	Yellow	0.281	0.400	0.500	500
15300834		5/16-18 UNC, 5/16-24 UNF	White	0.281	0.406	0.625	500
15301714		5/16-18 UNC, 5/16-24 UNF	Orange	0.281	0.406	0.750	500
15309454		5/16-18 UNC, 5/16-24 UNF	Blue	0.281	0.400	1.000	500
15309884		5/16-18 UNC, 5/16-24 UNF	Clear	0.281	0.400	1.000	500



9001
ISO certification

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

SC-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial threads	Colour	Dimensions in mm			Packaging
				d	D	h	
				Inside diameter	Outside diameter	Inside height	Quantity per bag
15316674		5/16-18 UNC, 5/16-24 UNF	Clear	7.14	10.16	50.80	500
15316694	M8		Black	7.49	10.67	12.70	500
15320674	M8		Clear	7.49	10.67	19.05	500
15322034	M8		Green	7.49	10.67	25.40	500
15322304	M8		Clear	7.49	10.67	31.75	500
15331874	M8		Clear	7.49	10.67	38.10	500
15331924			White	7.92	11.18	25.40	500
15338304			Clear	7.92	11.18	25.40	500
15340334			Pink	7.92	11.18	38.10	500
15340414			Clear	7.93	11.18	50.80	500
15340564			Black	8.64	11.68	25.40	500
15342774			Clear	8.64	11.68	25.40	500
15350064			Clear	8.64	11.68	50.80	500
15354494			Clear	8.71	11.76	25.40	500
15362494		3/8-16 UNC, 3/8-24 UNF	Clear	9.02	12.32	25.40	500
15362794		3/8-16 UNC, 3/8-24 UNF	Black	9.02	12.32	31.75	500
15366664		3/8-16 UNC, 3/8-24 UNF	Green	9.02	12.32	38.10	500
15369014			Clear	9.30	12.32	38.10	500
15370424	M10		Pink	9.53	12.83	12.70	500
15374884	M10		Blue	9.53	12.83	19.05	500
15382334	M10		Yellow	9.53	12.83	25.40	500
15382474	M10		Clear	9.53	12.83	25.40	500
15386244	M10		Grey	9.53	12.83	38.10	500
15387684		7/16-14 UNC, 7/16-20 UNF	Blue	10.31	13.49	25.40	500
15399234		7/16-14 UNC, 7/16-20 UNF	Clear	10.31	13.49	25.40	500
15400524			Black	11.10	14.35	25.40	500
15400784			Clear	11.10	14.35	25.40	500
15401194	M12		Clear	11.58	14.76	12.70	500
15406004	M12		Pink	11.58	14.76	25.40	500
15406044	M12		Clear	11.58	14.76	38.10	500
15406574			White	11.89	15.06	25.40	500
15407444		1/2-13 UNC, 1/2-20 UNF	Grey	12.19	15.37	25.40	500
15414694		1/2-13 UNC, 1/2-20 UNF	Pink	12.19	15.37	38.10	500
15414934		1/2-13 UNC, 1/2-20 UNF	Clear	12.19	15.37	38.10	500
15420444			Green	12.70	15.88	38.10	500
15423464	M14		Yellow	13.59	16.13	38.10	250
15425794	M14		Grey	13.59	16.13	76.20	250



9001
ISO certification

SC-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial threads	Colour	Dimensions in inches			Packaging
				d	D	h	
				Inside diameter	Outside diameter	Inside height	Quantity per bag
15316674		5/16-18 UNC, 5/16-24 UNF	Clear	0.281	0.400	2.000	500
15316694	M8		Black	0.295	0.420	0.500	500
15320674	M8		Clear	0.295	0.420	0.750	500
15322034	M8		Green	0.295	0.420	1.000	500
15322304	M8		Clear	0.295	0.420	1.250	500
15331874	M8		Clear	0.295	0.420	1.500	500
15331924			White	0.312	0.440	1.000	500
15338304			Clear	0.312	0.440	1.000	500
15340334			Pink	0.312	0.440	1.500	500
15340414			Clear	0.312	0.440	2.000	500
15340564			Black	0.340	0.460	1.000	500
15342774			Clear	0.340	0.460	1.000	500
15350064			Clear	0.340	0.460	2.000	500
15354494			Clear	0.343	0.463	1.000	500
15362494		3/8-16 UNC, 3/8-24 UNF	Clear	0.355	0.485	1.000	500
15362794		3/8-16 UNC, 3/8-24 UNF	Black	0.355	0.485	1.250	500
15366664		3/8-16 UNC, 3/8-24 UNF	Green	0.355	0.485	1.500	500
15369014			Clear	0.366	0.485	1.500	500
15370424	M10		Pink	0.375	0.505	0.500	500
15374884	M10		Blue	0.375	0.505	0.750	500
15382334	M10		Yellow	0.375	0.505	1.000	500
15382474	M10		Clear	0.375	0.505	1.000	500
15386244	M10		Grey	0.375	0.505	1.500	500
15387684		7/16-14 UNC, 7/16-20 UNF	Blue	0.406	0.531	1.000	500
15399234		7/16-14 UNC, 7/16-20 UNF	Clear	0.406	0.531	1.000	500
15400524			Black	0.437	0.565	1.000	500
15400784			Clear	0.437	0.565	1.000	500
15401194	M12		Clear	0.456	0.581	0.500	500
15406004	M12		Pink	0.456	0.581	1.000	500
15406044	M12		Clear	0.456	0.581	1.500	500
15406574			White	0.468	0.593	1.000	500
15407444		1/2-13 UNC, 1/2-20 UNF	Grey	0.480	0.605	1.000	500
15414694		1/2-13 UNC, 1/2-20 UNF	Pink	0.480	0.605	1.500	500
15414934		1/2-13 UNC, 1/2-20 UNF	Clear	0.480	0.605	1.500	500
15420444			Green	0.500	0.625	1.500	500
15423464	M14		Yellow	0.535	0.635	1.500	250
15425794	M14		Grey	0.535	0.635	3.000	250



9001
ISO certification

SC-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial threads	Colour	Dimensions in mm			Packaging
				d	D	h	
				Inside diameter	Outside diameter	Inside height	Quantity per bag
15428114	M15		Blue	14.27	17.42	38.10	250
15431034	M16	5/8-11 UNC, 5/8-18 UNF	Black	15.24	18.39	38.10	250
15436754			Clear	15.88	19.05	38.10	250
15446014			White	15.88	19.05	63.50	250
15446084			Pink	17.45	20.62	38.10	250
15449394			Clear	17.45	20.62	38.10	250
15449794	M19	3/4-10 UNC, 3/4-16 UNF	Green	18.54	21.72	38.10	250
15451284	M19	3/4-10 UNC, 3/4-16 UNF	Clear	18.54	21.72	38.10	250
15457114	M20		Yellow	19.05	22.23	38.10	250
15458164	M20		Grey	19.05	22.23	88.90	250
15462994			Blue	19.81	22.99	38.10	250
15463104	M22		Black	20.62	23.80	38.10	250
15463794	M22		Clear	20.62	23.80	38.10	250
15470284	M24		Clear	20.62	23.80	38.10	250
15476554			White	23.80	26.97	38.10	250
15478234	M25	1-8 UNC, 1-12 UNF	Pink	24.64	27.81	38.10	250
15481684	M25	1-8 UNC, 1-12 UNF	Clear	24.64	27.81	38.10	250
15482384	M27		Green	25.40	28.58	38.10	250
15496504	M27		Yellow	25.40	28.58	50.80	250
15503744			Grey	26.97	30.15	50.80	100
15513724	M28		Clear	26.97	30.15	38.10	100
15517184	M30		Blue	28.58	31.75	38.10	100
15519144	M30		Clear	28.58	31.75	38.10	100
15519564			Black	30.15	33.32	38.10	100
15522874			Clear	30.15	33.32	38.10	100
15527174			Clear	31.75	35.10	38.10	100
15532444			White	34.29	37.69	44.45	100
15535404			Clear	34.29	37.69	44.45	100
15543444			Clear	34.93	38.10	38.10	100
15552534			Pink	38.10	41.28	25.40	100
15553534			Clear	38.10	41.28	38.10	100
15554204			Green	38.10	41.28	44.45	100
15555484			Clear	41.28	44.45	50.80	100
15556664			Clear	44.45	47.63	38.10	100
15563114			Yellow	44.45	47.63	50.80	100
15565034			Clear	44.45	47.63	50.80	100
15574324			Clear	47.63	53.59	76.20	100



9001
ISO certification

SC-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial threads	Colour	Dimensions in inches			Packaging
				d	D	h	
				Inside diameter	Outside diameter	Inside height	Quantity per bag
15428114	M15		Blue	0.562	0.686	1.500	250
15431034	M16	5/8-11 UNC, 5/8-18 UNF	Black	0.600	0.724	1.500	250
15436754			Clear	0.625	0.750	1.500	250
15446014			White	0.625	0.750	2.500	250
15446084			Pink	0.687	0.812	1.500	250
15449394			Clear	0.687	0.812	1.500	250
15449794	M19	3/4-10 UNC, 3/4-16 UNF	Green	0.730	0.855	1.500	250
15451284	M19	3/4-10 UNC, 3/4-16 UNF	Clear	0.730	0.855	1.500	250
15457114	M20		Yellow	0.750	0.875	1.500	250
15458164	M20		Grey	0.750	0.875	3.500	250
15462994			Blue	0.780	0.905	1.500	250
15463104	M22		Black	0.812	0.937	1.500	250
15463794	M22		Clear	0.812	0.937	1.500	250
15470284	M24		Clear	0.812	0.937	1.500	250
15476554			White	0.937	1.062	1.500	250
15478234	M25	1-8 UNC, 1-12 UNF	Pink	0.970	1.095	1.500	250
15481684	M25	1-8 UNC, 1-12 UNF	Clear	0.970	1.095	1.500	250
15482384	M27		Green	1.000	1.125	1.500	250
15496504	M27		Yellow	1.000	1.125	2.000	250
15503744			Grey	1.062	1.187	2.000	100
15513724	M28		Clear	1.062	1.187	1.500	100
15517184	M30		Blue	1.125	1.250	1.500	100
15519144	M30		Clear	1.125	1.250	1.500	100
15519564			Black	1.187	1.312	1.500	100
15522874			Clear	1.187	1.312	1.500	100
15527174			Clear	1.250	1.382	1.500	100
15532444			White	1.350	1.484	1.750	100
15535404			Clear	1.350	1.484	1.750	100
15543444			Clear	1.375	1.500	1.500	100
15552534			Pink	1.500	1.625	1.000	100
15553534			Clear	1.500	1.625	1.500	100
15554204			Green	1.500	1.625	1.750	100
15555484			Clear	1.625	1.750	2.000	100
15556664			Clear	1.750	1.875	1.500	100
15563114			Yellow	1.750	1.875	2.000	100
15565034			Clear	1.750	1.875	2.000	100
15574324			Clear	1.875	2.110	3.000	100



9001
ISO certification

SC-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial threads	Colour	Dimensions in mm			Packaging
				d	D	h	
				Inside diameter	Outside diameter	Inside height	Quantity per bag
15574454			Grey	47.63	50.80	50.80	100
15575854			Blue	50.80	53.98	50.80	100
15577524			Clear	50.80	53.98	50.80	100

Part Number	Fits metric thread	Fits imperial threads	Colour	d	D	h	Quantity per bag
				Inside diameter	Outside diameter	Inside height	
				Dimensions in mm			Packaging



9001
ISO certification

SC-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial threads	Colour	Dimensions in inches			Packaging
				d	D	h	
				Inside diameter	Outside diameter	Inside height	Quantity per bag
15574454			Grey	1.875	2.000	2.000	100
15575854			Blue	2.000	2.125	2.000	100
15577524			Clear	2.000	2.125	2.000	100

Part Number	Fits metric thread	Fits imperial threads	Colour	d	D	h	Quantity per bag
				Inside diameter	Outside diameter	Inside height	
				Dimensions in inches			Packaging



9001
ISO certification

RC-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Precision Finish Cap

The RC-SH Series cap is engineered to provide precision masking of protected components during surface treatments. Built-in flexibility enables tight sealing of masked areas, to prevent finishing materials seepage and protect component surface integrity. Robust chemical resistance maintains cap functionality, to ensure highly accurate delineation.

Material: Ethylene Propylene Diene Monomer (EPDM)
Temperature Resistance: 177°**C** / 350°**F**

***Available in high temperature applications materials**

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



9001
ISO certification

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm			Dimensions in inches			Packaging
			d	D	h	d	D	h	
			Inside diameter	Outside diameter	Inside height	Inside diameter	Outside diameter	Inside height	Quantity per bag
15100044	M2	2-56 UNC, 2-64 UNF	1.78	4.32	25.40	0.070	0.170	1.000	1000
15109944		3-48 UNC, 3-56 UNF	2.36	4.95	19.05	0.093	0.195	0.750	1000
15122674	M3	4-40 UNC, 4-48 UNF	2.54	5.08	12.70	0.100	0.200	0.500	1000
15126594	M3	4-40 UNC, 4-48 UNF	2.54	5.08	25.40	0.100	0.200	1.000	1000
15130344		5-40 UNC, 5-44 UNF	2.77	5.46	19.05	0.109	0.215	0.750	1000
15144384		5-40 UNC, 5-44 UNF	2.77	5.46	25.40	0.109	0.215	1.000	1000
15173984		6-32 UNC, 6-40 UNF	3.18	6.35	12.70	0.125	0.250	0.500	1000
15189664		6-32 UNC, 6-40 UNF	3.18	6.35	25.40	0.125	0.250	1.000	1000
15201494			3.56	6.73	25.40	0.140	0.265	1.000	1000
15218014	M4		3.76	6.10	25.40	0.148	0.240	1.000	1000
15225594		8-32 UNC, 8-36 UNF	3.96	7.11	12.70	0.156	0.280	0.500	1000
15259074		8-32 UNC, 8-36 UNF	3.96	7.11	25.40	0.156	0.280	1.000	1000
15265404		10-24 UNC, 10-32 UNF	4.37	7.62	25.40	0.172	0.300	1.000	1000
15284504	M5		4.57	7.11	25.40	0.180	0.280	1.000	1000
15287184		12-24 UNC, 12-28 UNF	4.75	8.00	25.40	0.187	0.315	1.000	1000
15291804			5.54	8.59	25.40	0.218	0.338	1.000	500
15306774	M6		5.66	8.76	12.70	0.223	0.345	0.500	500
15310314	M6		5.66	8.76	38.10	0.223	0.345	1.500	500
15317064		1/4-20 UNC, 1/4-28 UNF	5.94	9.14	12.70	0.234	0.360	0.500	500
15317494		1/4-20 UNC, 1/4-28 UNF	5.94	9.14	25.40	0.234	0.360	1.000	500
15321484		1/4-20 UNC, 1/4-28 UNF	5.94	9.14	38.10	0.234	0.360	1.500	500

RC-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm			Dimensions in inches			Packaging
			d	D	h	d	D	h	
			Inside diameter	Outside diameter	Inside height	Inside diameter	Outside diameter	Inside height	Quantity per bag
15333834			6.35	9.65	12.70	0.250	0.380	0.500	500
15360754			6.35	9.65	25.40	0.250	0.380	1.000	500
15369764		5/16-18 UNC, 5/16-24 UNF	7.14	10.16	25.40	0.281	0.400	1.000	500
15390444	M8		7.49	10.67	25.40	0.295	0.420	1.000	500
15398834	M8		7.49	10.67	38.10	0.295	0.420	1.000	500
15414924			7.92	11.18	25.40	0.312	0.440	1.000	500
15417324		3/8-16 UNC, 3/8-24 UNF	9.02	12.32	38.10	0.355	0.485	1.500	500
15422554	M10		9.53	12.83	19.05	0.375	0.505	0.750	500
15424964	M10		9.53	12.83	25.40	0.375	0.505	1.000	500
15427794	M10		9.53	12.83	38.10	0.375	0.505	1.500	500
15435204		7/16-14 UNC, 7/16-20 UNF	10.31	13.49	25.40	0.406	0.531	1.000	500
15437754	M12		11.58	14.76	38.10	0.456	0.581	1.500	500
15444484		1/2-13 UNC, 1/2-20 UNF	12.19	15.37	38.10	0.480	0.605	1.500	500
15448864			12.70	15.88	38.10	0.500	0.625	1.500	500
15453034	M15		14.27	17.42	38.10	0.562	0.686	1.500	250
15456854			15.88	19.05	38.10	0.625	0.750	1.500	250
15457344			17.45	20.62	38.1	0.687	0.812	1.500	250
15463774	M20		19.05	22.23	38.10	0.750	0.875	1.500	250
15475074	M22		20.62	23.80	38.10	0.812	0.937	1.500	250
15501724	M24		22.23	25.40	38.10	0.875	1.000	1.500	250
15512064	M30		28.58	31.75	38.10	1.125	1.250	1.500	100
15522104			31.75	35.10	38.10	1.250	1.382	1.500	100
15538274			38.10	41.28	25.40	1.500	1.625	1.000	100
15542224			44.45	47.63	50.80	1.750	1.875	2.000	100
Part Number	**Fits metric thread**	**Fits Imperial Thread**	**d**	**D**	**h**	**d**	**D**	**h**	**Quantity per bag**
			Inside diameter	**Outside diameter**	**Inside height**	**Inside diameter**	**Outside diameter**	**Inside height**	
			Dimensions in mm			**Dimensions in inches**			**Packaging**





9001
ISO certification

WC-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Washer Cap

The WC-SH Series washer cap covers threaded studs and effectively protects both threaded and non-threaded holes. Stud or hole masking leaves a circular earthing area, and the design of the cap makes the whole masking process more efficient. Multiple re-use supports cost-effective operational efficiency while the cap is high temperature resistant.

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Masks the spotface area around the hole or stud**

Also available in: Black (**-BK**) RAL 9005

Pink (**-PK**)
RAL 4003

Yellow (**-YL**)
RAL 1016

Green (**-GN**)
RAL 6024

Grey (**-GY**)
RAL 7031

Purple (**-PL**)
RAL 4005

Red (**-RD**)
RAL 3024

Clear (**-CL**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Colour	Dimensions in mm				Packaging
				d	D	h	D1	
				Inside diameter	Outside diameter	Inside height	Flange diameter	Quantity per bag
15102054	M3	4-40 UNC, 4-48 UNF	Green	2.69	6.20	25.40	12.00	500
15114784		6-32 UNC, 6-40 UNF	Clear	3.18	6.60	25.40	12.70	500
15280204		6-32 UNC, 6-40 UNF	Clear	3.18	6.60	25.40	12.70	100
15287594	M4		Pink	3.70	6.70	25.40	12.00	500
15358614		8-32 UNC, 8-36 UNF	Clear	3.96	8.13	25.40	12.70	500
15489144		8-32 UNC, 8-36 UNF	Clear	3.96	8.13	25.40	12.70	100
15509104		10-24 UNC, 10-32 UNF	Clear	4.37	9.78	25.40	12.70	500
15546894		10-24 UNC, 10-32 UNF	Clear	4.37	9.78	25.40	12.70	100
15621064	M5		Clear	4.60	8.20	25.40	15.00	500
15734724	M6		Red	5.59	8.71	25.40	15.00	500
15777354	M6		Red	5.59	8.71	25.40	15.00	100
15792784	M8		Black	7.50	10.70	25.40	18.00	250
15897434	M8		Black	7.50	10.70	25.40	18.00	50
15909324	M10		Yellow	9.50	12.70	38.10	20.83	250
15910934	M10		Yellow	9.50	12.70	38.10	20.83	50
15929404	M12		Clear	11.50	16.69	38.10	25.00	250
15956544	M16		Purple	15.50	20.70	38.10	31.00	250
15957084	M20		Grey	19.50	24.69	38.10	38.00	250

Part Number	Fits metric thread	Fits imperial thread	Colour	d	D	h	D1	Quantity per bag
				Inside diameter	Outside diameter	Inside height	Flange diameter	
				Dimensions in mm				Packaging

9001
ISO certification

WC-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Colour	Dimensions in inches				Packaging
				d	D	h	D1	
				Inside diameter	Outside diameter	Inside height	Flange diameter	Quantity per bag
15102054	M3	4-40 UNC, 4-48 UNF	Green	0.106	0.244	1.000	0.472	500
15114784		6-32 UNC, 6-40 UNF	Clear	0.125	0.260	1.000	0.500	500
15280204		6-32 UNC, 6-40 UNF	Clear	0.125	0.260	1.000	0.500	100
15287594	M4		Pink	0.146	0.264	1.000	0.472	500
15358614		8-32 UNC, 8-36 UNF	Clear	0.156	0.320	1.000	0.500	500
15489144		8-32 UNC, 8-36 UNF	Clear	0.156	0.320	1.000	0.500	100
15509104		10-24 UNC, 10-32 UNF	Clear	0.172	0.385	1.000	0.500	500
15546894		10-24 UNC, 10-32 UNF	Clear	0.172	0.385	1.000	0.500	100
15621064	M5		Clear	0.181	0.323	1.000	0.591	500
15734724	M6		Red	0.220	0.343	1.000	0.591	500
15777354	M6		Red	0.220	0.343	1.000	0.591	100
15792784	M8		Black	0.295	0.421	1.000	0.709	250
15897434	M8		Black	0.295	0.421	1.000	0.709	50
15909324	M10		Yellow	0.374	0.500	1.500	0.820	250
15910934	M10		Yellow	0.374	0.500	1.500	0.820	50
15929404	M12		Clear	0.453	0.657	1.500	0.984	250
15956544	M16		Purple	0.610	0.815	1.500	1.220	250
15957084	M20		Grey	0.768	0.972	1.500	1.496	250

Part Number	Fits metric thread	Fits imperial thread	Colour	d	D	h	D1	Quantity per bag
				Inside diameter	Outside diameter	Inside height	Flange diameter	
				Dimensions in inches				Packaging



9001
ISO certification

SRC-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Earthing Cap

The SRC-SH Series earthing cap provides precision and durability. In larger sizes, the cap has a tapered opening that allows material to come close to the inside dimensions, for precise coating while protecting earthing tabs. The cap can be used as a plug for small rectangular openings, is reusable multiple times, and withstands high temperatures.

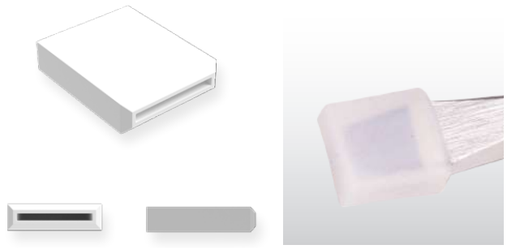

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Can also be used as a plug**

Clear (-**CL**)
RAL 9003

Pink (-**PK**)
RAL 4003

R. Red (-**RR**)
RAL 2010

Yellow (-**YL**)
RAL 1016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm			Dimensions in inches			Packaging
		w	l	h	w	l	h	
		Inside width	Inside length	Inside height	Inside width	Inside length	Inside height	Quantity per bag
15314674	Clear	6.30	10.01	0.76	0.248	0.394	0.030	1000
15400544	Rusty Red	6.30	11.58	0.76	0.248	0.456	0.030	1000
15466504	Yellow	11.68	7.11	0.89	0.460	0.280	0.035	1000
15520014	Clear	11.94	9.50	1.02	0.470	0.374	0.040	1000
15775744	Pink	12.45	17.45	1.19	0.490	0.687	0.047	1000

Part Number	Colour	w	l	h	w	l	h	Quantity per bag
		Inside width	Inside length	Inside height	Inside width	Inside length	Inside height	
		Dimensions in mm			Dimensions in inches			Packaging

9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

Masking experience and expertise

Caplugs has experience solving challenges across a wide range of industries and applications, including masking solutions used in harsh environments during an array of finishing processes.

Processes

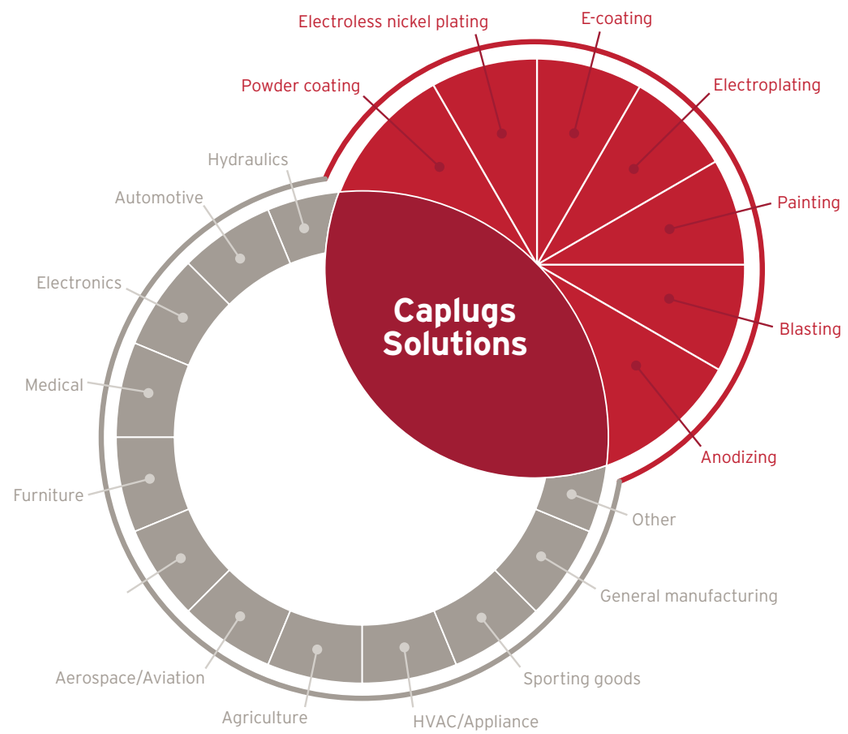

Industries Served

Scan for more information about Caplugs masking solutions

ZC-S-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Grease Nipple Cap

The ZC-S-SH Series cap offers a flexible, close and robust fit around grease nipple components found in many mechanical systems. Highly accurate edge-of-cap protection from contaminants and finishing materials is matched by heat resistance. The short-handle design is ideal for restricted working areas while visual coding enables rapid identification.

Material: Refer to product table
Temperature Resistance: Refer to product table

***Available in high temperature applications materials**

Blue (-**BL**)
RAL 5005

Green (-**GN**)
RAL 6032

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Material	Maximum temperature degrees C	Maximum temperature degrees F	Dimensions in mm				Packaging
					d	h	d1	H	
					Inside diameter	Inside height	Inside diameter	Height	Quantity per bag
15471934	Blue	Ultrabake™ (VMQ)	315	600	5.89	4.90	9.25	29.95	500
15946544	Green	Neoprene (CR)	177	350	5.89	4.90	9.25	29.95	500
Part Number	Colour	Material	Maximum temperature degrees C	Maximum temperature degrees F	d	h		H	Quantity per bag
					Inside diameter	Inside height	Inside diameter	Height	
					Dimensions in mm				Packaging

9001
ISO certification

ZC-S-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Material	Maximum temperature degrees C	Maximum temperature degrees F	Dimensions in inches				Packaging
					d	h	d1	H	
					Inside diameter	Inside height	Inside diameter	Height	Quantity per bag
15471934	Blue	Ultrabake™ (VMQ)	315	600	0.232	0.193	0.364	1.179	500
15946544	Green	Neoprene (CR)	177	350	0.232	0.193	0.364	1.179	500
Part Number	Colour	Material	Maximum temperature degrees C	Maximum temperature degrees F	d	h	d1	H	Quantity per bag
					Inside diameter	Inside height	Inside diameter	Height	
					Dimensions in inches				Packaging



9001
ISO certification

ZC-L-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Grease Nipple Cap

The ZC-L-SH Series grease nipple cap is purpose-designed to effectively mask off lubrication fittings during finishing. Precision application of materials is enabled without contamination and the cap maintains full integrity at higher temperatures. A built-in extended handle makes installation or removal easier, even in hard-to-reach working areas.

Material: Refer to product table
Temperature Resistance: Refer to product table

***Available in low temperature applications materials**

Green (-**GN**)
RAL 6032

Red (-**RD**)
RAL 3017

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Material	Maximum temperature degrees C	Maximum temperature degrees F	Dimensions in mm				Packaging
					d	h	d1	H	
					Inside diameter	Inside height	Inside diameter	Height	Quantity per bag
15545974	Red	Ultrabake™ (VMQ)	315	600	5.89	4.90	9.25	59.26	250
15987514	Green	Neoprene (CR)	177	350	5.89	4.90	9.25	59.26	250

Part Number	Colour	Material	Maximum temperature degrees C	Maximum temperature degrees F	d	h	d1	H	Quantity per bag
					Inside diameter	Inside height	Inside diameter	Height	
					Dimensions in mm				Packaging

9001
ISO certification

ZC-L-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Material	Maximum temperature degrees C	Maximum temperature Degrees F	Dimensions in inches				Packaging
					d	h	d1	H	
					Inside diameter	Inside height	Inside diameter	Height	Quantity per bag
15545974	Red	Ultrabake™ (VMQ)	315	600	0.232	0.193	0.364	2.333	250
15987514	Green	Neoprene (CR)	177	350	0.232	0.193	0.364	2.333	250

Part Number	Colour	Material	Maximum temperature degrees C	Maximum temperature Degrees F	d	h	d1	H	Quantity per bag
					Inside diameter	Inside height	Inside diameter	Height	
					Dimensions in inches				Packaging



9001
ISO certification

HVC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Flexible Conformance Cap

The HVC Series flexible round cap provides outstanding flexibility and high temperature resistance, combined with a secure and reliably resilient fit. Ideal for thread protection, shielding from contamination and damage, and for creating effective dust and moisture seals, the cap is also easily applied and removed to support operations at pace.

Material: Flex500™ (PVC)
Temperature Resistance: 149°**C** / 300°**F**

***Available in low temperature applications materials**

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only	Carton quantity	Mini pack quantity
37107111		1-64 UNC, 1-72 UNF	1.57	15.88	3.05	5000	1000
37108611			2.03	15.88	3.56	5000	1000
37114051		3-48 UNC, 3-56 UNF	2.36	19.05	3.81	5000	1000
37114421		5-40 UNC, 5-44 UNF	2.77	19.05	4.57	5000	1000
37115741		6-32 UNC, 6-40 UNF	3.18	12.70	5.08	5000	
37119051		6-32 UNC, 6-40 UNF	3.18	25.40	5.08	5000	1000
37121041			3.56	12.70	5.33	5000	
37126511			3.56	25.40	5.33	5000	1000
37129831	M4		3.76	12.70	6.30	5000	
37132511	M4		3.76	25.40	6.30	5000	
37135731		8-32 UNC, 8-36 UNF	3.96	12.70	6.10	5000	
37140811		8-32 UNC, 8-36 UNF	3.96	25.40	6.10	5000	1000
37142431		10-24 UNC, 10-32 UNF	4.37	12.70	6.35	5000	
37145631		10-24 UNC, 10-32 UNF	4.37	25.40	6.35	5000	1000
37149111	M5		4.57	12.70	6.60	5000	
37149221	M5		4.57	25.40	6.60	5000	
37151241		12-24 UNC, 12-28 UNF	4.75	12.70	6.86	5000	
37152341		12-24 UNC, 12-28 UNF	4.75	25.40	6.86	5000	1000
37157881		12-24 UNC, 12-28 UNF	4.75	38.10	6.86	4000	
37160461			5.16	12.70	7.37	5000	
37163041			5.16	25.40	7.37	5000	1000

9001
ISO certification

HVC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88





*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only	Carton quantity	Mini pack quantity
37107111		1-64 UNC, 1-72 UNF	0.062	0.625	0.120	5000	1000
37108611			0.080	0.625	0.140	5000	1000
37114051		3-48 UNC, 3-56 UNF	0.093	0.750	0.150	5000	1000
37114421		5-40 UNC, 5-44 UNF	0.109	0.750	0.180	5000	1000
37115741		6-32 UNC, 6-40 UNF	0.125	0.500	0.200	5000	
37119051		6-32 UNC, 6-40 UNF	0.125	1.000	0.200	5000	1000
37121041			0.140	0.500	0.210	5000	
37126511			0.140	1.000	0.210	5000	1000
37129831	M4		0.148	0.500	0.248	5000	
37132511	M4		0.148	1.000	0.248	5000	
37135731		8-32 UNC, 8-36 UNF	0.156	0.500	0.240	5000	
37140811		8-32 UNC, 8-36 UNF	0.156	1.000	0.240	5000	1000
37142431		10-24 UNC, 10-32 UNF	0.172	0.500	0.250	5000	
37145631		10-24 UNC, 10-32 UNF	0.172	1.000	0.250	5000	1000
37149111	M5		0.180	0.500	0.260	5000	
37149221	M5		0.180	1.000	0.260	5000	
37151241		12-24 UNC, 12-28 UNF	0.187	0.500	0.270	5000	
37152341		12-24 UNC, 12-28 UNF	0.187	1.000	0.270	5000	1000
37157881		12-24 UNC, 12-28 UNF	0.187	1.500	0.270	4000	
37160461			0.203	0.500	0.290	5000	
37163041			0.203	1.000	0.290	5000	1000

9001
ISO certification

HVC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only	Carton quantity	Mini pack quantity
37163961			5.54	12.70	7.87	5000	
37167011			5.54	25.40	7.87	5000	1000
37170611	M6		5.69	12.70	7.87	5000	
37171531	M6		5.69	25.40	7.87	4000	
37174691		1/4-20 UNC, 1/4-28 UNF	5.94	12.70	8.13	5000	
37179091		1/4-20 UNC, 1/4-28 UNF	5.94	25.40	8.13	5000	1000
37179111			6.35	12.70	8.89	5000	
37184661			6.35	25.40	8.89	5000	1000
37185381		5/16-18 UNC, 5/16-24 UNF	7.14	12.70	9.65	5000	
37189761		5/16-18 UNC, 5/16-24 UNF	7.14	25.40	9.65	5000	1000
37196821			7.37	12.70	10.16	5000	
37198401			7.37	25.40	10.16	5000	
37201461	M8		7.72	12.70	10.41	5000	
37208761	M8		7.72	25.40	10.41	5000	
37211801			7.93	12.70	10.67	5000	
37213371			7.93	25.40	10.67	5000	1000
37216801			7.93	38.10	10.92	2500	
37218101			8.71	12.70	11.43	5000	
37220911			8.71	25.40	11.43	2500	500
37222031	M10		9.53	12.70	12.70	2500	
37222931	M10		9.53	25.40	12.70	2500	500
37227101		7/16-14 UNC, 7/16-20 UNF	10.31	12.70	13.46	5000	
37227801		7/16-14 UNC, 7/16-20 UNF	10.31	25.40	13.46	2500	500
37228311			11.10	12.70	14.22	2500	
37234131			11.10	25.40	14.22	2500	500
37234221	M12		11.68	12.70	14.73	5000	
37236121	M12		11.68	25.40	14.73	2500	
37236531			11.86	12.70	14.73	5000	
37237061			11.86	25.40	14.73	2500	
37240561			12.45	12.70	15.49	5000	
37243071			12.45	25.40	15.49	3000	
37243561			12.70	12.70	15.75	5000	
37243851			12.70	25.40	15.75	2500	500
37246261	M14		13.49	12.70	16.51	5000	
37253281	M14		13.49	25.40	16.51	2500	
37256801	M15		14.28	12.70	17.53	2500	
37259711	M15		14.28	25.40	17.53	2000	



9001
ISO certification

HVC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only	Carton quantity	Mini pack quantity
37163961			0.218	0.500	0.310	5000	
37167011			0.218	1.000	0.310	5000	1000
37170611	M6		0.224	0.500	0.310	5000	
37171531	M6		0.224	1.000	0.310	4000	
37174691		1/4-20 UNC, 1/4-28 UNF	0.234	0.500	0.320	5000	
37179091		1/4-20 UNC, 1/4-28 UNF	0.234	1.000	0.320	5000	1000
37179111			0.250	0.500	0.350	5000	
37184661			0.250	1.000	0.350	5000	1000
37185381		5/16-18 UNC, 5/16-24 UNF	0.281	0.500	0.380	5000	
37189761		5/16-18 UNC, 5/16-24 UNF	0.281	1.000	0.380	5000	1000
37196821			0.290	0.500	0.400	5000	
37198401			0.290	1.000	0.400	5000	
37201461	M8		0.304	0.500	0.410	5000	
37208761	M8		0.304	1.000	0.410	5000	
37211801			0.312	0.500	0.420	5000	
37213371			0.312	1.000	0.420	5000	1000
37216801			0.312	1.500	0.430	2500	
37218101			0.343	0.500	0.450	5000	
37220911			0.343	1.000	0.450	2500	500
37222031	M10		0.375	0.500	0.500	2500	
37222931	M10		0.375	1.000	0.500	2500	500
37227101		7/16-14 UNC, 7/16-20 UNF	0.406	0.500	0.530	5000	
37227801		7/16-14 UNC, 7/16-20 UNF	0.406	1.000	0.530	2500	500
37228311			0.437	0.500	0.560	2500	
37234131			0.437	1.000	0.560	2500	500
37234221	M12		0.460	0.500	0.580	5000	
37236121	M12		0.460	1.000	0.580	2500	
37236531			0.467	0.500	0.580	5000	
37237061			0.467	1.000	0.580	2500	
37240561			0.490	0.500	0.610	5000	
37243071			0.490	1.000	0.610	3000	
37243561			0.500	0.500	0.620	5000	
37243851			0.500	1.000	0.620	2500	500
37246261	M14		0.531	0.500	0.650	5000	
37253281	M14		0.531	1.000	0.650	2500	
37256801	M15		0.562	0.500	0.690	2500	
37259711	M15		0.562	1.000	0.690	2000	



9001
ISO certification

HVC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only	Carton quantity	Mini pack quantity
37261121	M16	5/8-11 UNC, 5/8-18 UNF	15.24	12.70	18.54	3000	
37269511	M16	5/8-11 UNC, 5/8-18 UNF	15.24	25.40	18.54	2000	
37274141			15.88	12.70	19.30	2500	
37279961			15.88	25.40	19.30	2000	400
37295061			15.88	38.10	19.56	1500	
37295411	M17		16.26	12.70	19.56	4000	
37295541	M17		16.26	25.40	19.56	2000	
37296891			16.89	12.70	20.32	4000	
37303781			16.89	25.40	20.32	2000	
37306551	M18		17.45	12.70	20.57	2500	
37312001	M18		17.45	25.40	20.57	1000	
37312241			17.53	12.70	20.83	2500	
37316931			17.53	25.40	20.83	1000	
37317081			18.42	12.70	21.84	2500	
37318531			18.42	25.40	21.84	1000	
37319621	M20		19.05	12.70	22.35	2500	
37319881	M20		19.05	25.40	22.35	1000	200
37321001			20.63	12.70	23.88	2500	
37323361			20.63	25.40	23.88	1000	
37331191			20.63	38.10	24.13	1000	
37335441			21.41	12.70	24.89	2500	
37349441			21.41	25.40	24.89	1000	
37349921			22.10	12.70	25.65	1000	
37350581			22.10	25.40	25.65	1000	
37351521			22.23	12.70	25.91	2500	
37355451			22.23	25.40	25.91	1000	200
37364691			22.23	38.10	25.91	1000	
37366861	M22		23.80	12.70	27.43	2000	
37367261	M22		23.80	25.40	27.43	1000	
37376511			25.02	12.70	28.70	2000	
37376611			25.02	25.40	28.70	1000	
37381871			25.40	12.70	28.96	1000	
37389021			25.40	25.40	28.96	1000	200
37389741			25.40	38.10	28.96	1000	
37392161			26.97	25.40	30.48	1200	
37394751			27.69	25.40	30.99	1200	
37402661			28.57	25.40	32.26	500	



9001
ISO certification

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

HVC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only	Carton quantity	Mini pack quantity
37261121	M16	5/8-11 UNC, 5/8-18 UNF	0.600	0.500	0.730	3000	
37269511	M16	5/8-11 UNC, 5/8-18 UNF	0.600	1.000	0.730	2000	
37274141			0.625	0.500	0.760	2500	
37279961			0.625	1.000	0.760	2000	400
37295061			0.625	1.500	0.770	1500	
37295411	M17		0.640	0.500	0.770	4000	
37295541	M17		0.640	1.000	0.770	2000	
37296891			0.665	0.500	0.800	4000	
37303781			0.665	1.000	0.800	2000	
37306551	M18		0.687	0.500	0.810	2500	
37312001	M18		0.687	1.000	0.810	1000	
37312241			0.690	0.500	0.820	2500	
37316931			0.690	1.000	0.820	1000	
37317081			0.725	0.500	0.860	2500	
37318531			0.725	1.000	0.860	1000	
37319621	M20		0.750	0.500	0.880	2500	
37319881	M20		0.750	1.000	0.880	1000	200
37321001			0.812	0.500	0.940	2500	
37323361			0.812	1.000	0.940	1000	
37331191			0.812	1.500	0.950	1000	
37335441			0.843	0.500	0.980	2500	
37349441			0.843	1.000	0.980	1000	
37349921			0.870	0.500	1.010	1000	
37350581			0.870	1.000	1.010	1000	
37351521			0.875	0.500	1.020	2500	
37355451			0.875	1.000	1.020	1000	200
37364691			0.875	1.500	1.020	1000	
37366861	M22		0.937	0.500	1.080	2000	
37367261	M22		0.937	1.000	1.080	1000	
37376511			0.985	0.500	1.130	2000	
37376611			0.985	1.000	1.130	1000	
37381871			1.000	0.500	1.140	1000	
37389021			1.000	1.000	1.140	1000	200
37389741			1.000	1.500	1.140	1000	
37392161			1.062	1.000	1.200	1200	
37394751			1.090	1.000	1.220	1200	
37402661			1.125	1.000	1.270	500	



9001
ISO certification

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

HVC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only	Carton quantity	Mini pack quantity
37407491			30.14	25.40	33.78	500	
37419531			31.75	25.40	35.31	500	
37419761			31.75	38.10	35.31	500	
37421311			33.32	25.40	36.83	1000	
37425961			33.32	38.10	36.83	600	
37428051			34.92	25.40	38.61	500	
37429301			34.92	38.10	38.61	400	
37430831			36.50	25.40	40.06	750	
37432091			38.10	25.40	41.66	500	
37432321			38.10	38.10	41.66	300	
37435301			40.46	25.40	43.76	500	
37442081			41.27	25.40	44.96	500	
37443001			42.84	25.40	46.48	500	
37443511			44.45	25.40	48.01	500	
37455121			46.02	25.40	49.58	1000	
37458921			47.62	25.40	51.31	250	
37466791			49.20	25.40	52.76	600	
37468001			50.80	25.40	54.36	250	
37471791			50.80	38.10	54.36	300	
37480201			53.98	25.40	57.79	500	
37483781			54.76	25.40	58.57	500	
37488511			57.15	25.40	60.96	500	
37497371			57.15	38.10	60.96	300	
37497621			60.33	25.40	64.14	200	
37503251			60.33	38.10	64.14	250	
37505141			62.48	25.40	66.29	250	
37507091			63.50	25.40	67.31	400	
37509221			63.50	38.10	67.31	250	
37510871			66.67	25.40	70.49	400	
37517971			66.67	38.10	70.49	200	
37519631			68.25	25.40	72.31	400	
37524211			69.85	25.40	73.91	300	
37529631			69.85	38.10	73.91	200	
37531001			73.03	25.40	77.09	250	
37534131			76.20	25.40	80.26	250	
37537081			76.20	38.10	80.26	250	
37537881			79.37	25.40	83.44	250	



9001
ISO certification

HVC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only	Carton quantity	Mini pack quantity
37407491			1.187	1.000	1.330	500	
37419531			1.250	1.000	1.390	500	
37419761			1.250	1.500	1.390	500	
37421311			1.312	1.000	1.450	1000	
37425961			1.312	1.500	1.450	600	
37428051			1.375	1.000	1.520	500	
37429301			1.375	1.500	1.520	400	
37430831			1.437	1.000	1.577	750	
37432091			1.500	1.000	1.640	500	
37432321			1.500	1.500	1.640	300	
37435301			1.593	1.000	1.723	500	
37442081			1.625	1.000	1.770	500	
37443001			1.687	1.000	1.830	500	
37443511			1.750	1.000	1.890	500	
37455121			1.812	1.000	1.952	1000	
37458921			1.875	1.000	2.020	250	
37466791			1.937	1.000	2.077	600	
37468001			2.000	1.000	2.140	250	
37471791			2.000	1.500	2.140	300	
37480201			2.125	1.000	2.275	500	
37483781			2.156	1.000	2.306	500	
37488511			2.250	1.000	2.400	500	
37497371			2.250	1.500	2.400	300	
37497621			2.375	1.000	2.525	200	
37503251			2.375	1.500	2.525	250	
37505141			2.460	1.000	2.610	250	
37507091			2.500	1.000	2.650	400	
37509221			2.500	1.500	2.650	250	
37510871			2.625	1.000	2.775	400	
37517971			2.625	1.500	2.775	200	
37519631			2.687	1.000	2.847	400	
37524211			2.750	1.000	2.910	300	
37529631			2.750	1.500	2.910	200	
37531001			2.875	1.000	3.035	250	
37534131			3.000	1.000	3.160	250	
37537081			3.000	1.500	3.160	250	
37537881			3.125	1.000	3.285	250	



9001
ISO certification

HVC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only	Carton quantity	Mini pack quantity
37539061			79.37	38.10	83.44	300	
37541951			82.55	28.58	86.61	200	
37542351			85.73	28.58	89.79	250	
37543441			88.90	28.58	92.96	225	
37551661			88.90	38.10	92.96	200	
37552701			92.08	28.58	96.14	200	
37554721			92.25	28.58	99.31	200	
37555241			98.43	28.58	102.49	200	
37555731			101.60	31.75	105.66	100	
37562771			104.78	31.75	108.84	150	
37565071			106.35	31.75	110.41	100	
37572421			107.95	31.75	112.01	150	
37576381			111.13	31.75	115.19	150	
37581111			114.30	31.75	118.36	150	
37584031			120.65	31.75	124.71	100	
37587971			127.00	34.93	131.57	125	
37591591			131.75	34.93	136.32	125	
37592161			136.53	34.93	141.10	100	
37592601			139.70	34.93	144.27	100	
37592931			146.05	34.93	150.62	50	
37596431			152.40	38.10	156.97	90	
37597501			158.75	38.10	163.32	90	
37598611			165.10	38.10	169.67	80	
37610401			171.45	38.10	176.02	70	
37611561			177.80	38.10	182.37	50	
37612861			184.15	38.10	188.72	70	
37618171			190.50	38.10	195.07	50	
37629461			196.85	44.45	201.42	50	
37632351			203.20	44.45	207.77	50	
37632591			215.90	44.45	220.47	50	
37636151			222.25	44.45	226.82	50	
37636611			228.60	44.45	233.68	40	
37637161			234.95	44.45	240.03	40	
37638861			238.13	44.45	243.21	40	
37642061			241.30	44.45	246.38	40	
37642291			244.48	44.45	249.56	40	
37642871			250.83	44.45	255.91	40	



9001
ISO certification

HVC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only	Carton quantity	Mini pack quantity
37539061			3.125	1.500	3.285	300	
37541951			3.250	1.125	3.410	200	
37542351			3.375	1.125	3.535	250	
37543441			3.500	1.125	3.660	225	
37551661			3.500	1.500	3.660	200	
37552701			3.625	1.125	3.785	200	
37554721			3.750	1.125	3.910	200	
37555241			3.875	1.125	4.035	200	
37555731			4.000	1.250	4.160	100	
37562771			4.125	1.250	4.285	150	
37565071			4.187	1.250	4.347	100	
37572421			4.250	1.250	4.410	150	
37576381			4.375	1.250	4.535	150	
37581111			4.500	1.250	4.660	150	
37584031			4.750	1.250	4.910	100	
37587971			5.000	1.375	5.180	125	
37591591			5.187	1.375	5.367	125	
37592161			5.375	1.375	5.555	100	
37592601			5.500	1.375	5.680	100	
37592931			5.750	1.375	5.930	50	
37596431			6.000	1.500	6.180	90	
37597501			6.250	1.500	6.430	90	
37598611			6.500	1.500	6.680	80	
37610401			6.750	1.500	6.930	70	
37611561			7.000	1.500	7.180	50	
37612861			7.250	1.500	7.430	70	
37618171			7.500	1.500	7.680	50	
37629461			7.750	1.750	7.930	50	
37632351			8.000	1.750	8.180	50	
37632591			8.500	1.750	8.680	50	
37636151			8.750	1.750	8.930	50	
37636611			9.000	1.750	9.200	40	
37637161			9.250	1.750	9.450	40	
37638861			9.375	1.750	9.575	40	
37642061			9.500	1.750	9.700	40	
37642291			9.625	1.750	9.825	40	
37642871			9.875	1.750	10.075	40	



9001
ISO certification

HVC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only	Carton quantity	Mini pack quantity
37643501			254.00	50.80	259.08	35	
37646861			261.92	50.80	267.00	25	
37655071			273.05	50.80	278.13	25	
37655081			279.40	50.80	284.48	25	
37655471			288.93	50.80	294.01	25	
37656471			298.45	50.80	303.53	25	
37659401			304.80	50.80	309.88	25	
37659731			311.15	50.80	316.23	25	
37662611			317.50	50.80	322.58	25	
37662751			320.68	50.80	325.76	25	
37666971			327.03	50.80	332.11	25	
37669941			336.55	50.80	342.14	25	
37674131			342.90	50.80	348.49	25	
37676891			345.44	50.80	351.03	25	
37677351			355.60	50.80	361.19	18	
37677461			361.95	50.80	367.54	25	
37679861			368.30	50.80	373.89	25	
37688671			381.00	50.80	386.59	25	
37689891			396.88	50.80	402.46	25	
37690471			403.23	50.80	409.32	25	
37692371			406.40	50.80	412.50	25	
37694301			419.10	50.80	425.20	20	
37694851			441.33	63.50	447.42	20	
37695781			457.20	63.50	463.30	15	
37697591			482.60	63.50	488.70	15	
37704691			533.40	63.50	539.50	15	
Part Number	Fits metric thread	Fits imperial thread	d	h	D	Carton quantity	Mini pack quantity
			Inside diameter	Inside height	Outside diameter. Ref only		
			Dimensions in mm			Packaging	



9001
ISO certification

HVC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches			Packaging	
			d	h	D		
			Inside diameter	Inside height	Outside diameter. Ref only	Carton quantity	Mini pack quantity
37643501			10.000	2.000	10.200	35	
37646861			10.312	2.000	10.512	25	
37655071			10.750	2.000	10.950	25	
37655081			11.000	2.000	11.200	25	
37655471			11.375	2.000	11.575	25	
37656471			11.750	2.000	11.950	25	
37659401			12.000	2.000	12.200	25	
37659731			12.250	2.000	12.450	25	
37662611			12.500	2.000	12.700	25	
37662751			12.625	2.000	12.825	25	
37666971			12.875	2.000	13.075	25	
37669941			13.250	2.000	13.470	25	
37674131			13.500	2.000	13.720	25	
37676891			13.600	2.000	13.820	25	
37677351			14.000	2.000	14.220	18	
37677461			14.250	2.000	14.470	25	
37679861			14.500	2.000	14.720	25	
37688671			15.000	2.000	15.220	25	
37689891			15.625	2.000	15.845	25	
37690471			15.875	2.000	16.115	25	
37692371			16.000	2.000	16.240	25	
37694301			16.500	2.000	16.740	20	
37694851			17.375	2.500	17.615	20	
37695781			18.000	2.500	18.240	15	
37697591			19.000	2.500	19.240	15	
37704691			21.000	2.500	21.240	15	
Part Number	Fits metric thread	Fits imperial thread	d	h	D	Carton quantity	Mini pack quantity
			Inside diameter	Inside height	Outside diameter. Ref only		
			Dimensions in inches			Packaging	



9001
ISO certification

HEZ Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Flexible Pull-Tab Cap

The HEZ Series flexible pull-tab cap combines flexibility with high temperature resistance in an innovative design that incorporates a long pull tab centered at the cap top. Easy finger removal of the tab means no need for tools, reducing potential for any component threads and surfaces damage. The pull tab also supports operational efficiency.

Material: Flex500™ (PVC)
Temperature Resistance: 149°**C** / 300°**F**

***Available in low temperature applications materials**

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm				Packaging	
			d	h	D	h1	Carton quantity	Mini pack quantity
			Inside diameter	Inside height	Outside diameter. Ref only	Handle height		
37153551	M5	12-24 UNC, 12-28 UNF	4.74	19.00	7.29	12.70	5000	
37225751	M6		5.46	19.00	8.00	12.70	5000	
37284131		1/4-20 UNC, 1/4-28 UNF	6.09	19.00	8.64	15.87	4000	800
37285561	M8	5/16-18 UNC, 5/16-24 UNF	7.69	19.00	10.24	15.87	4000	800
37290821	M10		9.27	19.00	12.07	15.87	3500	700
37319541			9.80	19.00	12.60	15.87	4000	
37338151			10.31	19.00	13.36	15.87	4000	
37354831		7/16-14 UNC, 7/16-20 UNF	10.84	19.00	13.89	15.87	3000	
37363701	M12		11.68	19.00	14.73	12.70	2500	
37373011		1/2-13 UNC, 1/2-20 UNF	12.44	19.00	15.49	17.44	2500	500
37403891	M14		13.23	19.00	16.54	15.88	2500	
37422261	M15		14.02	19.00	17.32	17.44	2000	500
37442491			15.24	19.00	18.54	20.62	2000	
37455511	M16		15.62	19.00	18.92	17.44	2000	400
37486021	M17		16.63	19.00	19.94	22.22	2000	
37486631			17.02	19.00	20.32	20.32	2000	
37490631			17.19	19.00	20.50	20.62	2000	
37519651			17.65	19.00	20.96	20.62	1500	
37547191			18.66	19.00	21.97	20.62	1500	300
37582891	M20		19.30	19.00	22.61	20.32	2000	
37610361			20.24	19.00	23.55	20.62	1500	

9001
ISO certification

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

HEZ Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches				Packaging	
			d	h	D	h1	Carton quantity	Mini pack quantity
			Inside diameter	Inside height	Outside diameter. Ref only	Handle height		
37153551	M5	12-24 UNC, 12-28 UNF	0.187	0.750	0.287	0.500	5000	
37225751	M6		0.215	0.750	0.315	0.500	5000	
37284131		1/4-20 UNC, 1/4-28 UNF	0.240	0.750	0.340	0.625	4000	800
37285561	M8	5/16-18 UNC, 5/16-24 UNF	0.303	0.750	0.403	0.625	4000	800
37290821	M10		0.365	0.750	0.475	0.625	3500	700
37319541			0.386	0.750	0.496	0.625	4000	
37338151			0.406	0.750	0.526	0.625	4000	
37354831		7/16-14 UNC, 7/16-20 UNF	0.427	0.750	0.547	0.625	3000	
37363701	M12		0.460	0.750	0.580	0.500	2500	
37373011		1/2-13 UNC, 1/2-20 UNF	0.490	0.750	0.610	0.687	2500	500
37403891	M14		0.521	0.750	0.651	0.625	2500	
37422261	M15		0.552	0.750	0.682	0.687	2000	500
37442491			0.600	0.750	0.730	0.812	2000	
37455511	M16		0.615	0.750	0.745	0.687	2000	400
37486021	M17		0.655	0.750	0.785	0.875	2000	
37486631			0.670	0.750	0.800	0.800	2000	
37490631			0.677	0.750	0.807	0.812	2000	
37519651			0.695	0.750	0.825	0.812	1500	
37547191			0.735	0.750	0.865	0.812	1500	300
37582891	M20		0.760	0.750	0.890	0.800	2000	
37610361			0.797	0.750	0.927	0.812	1500	

9001
ISO certification

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

HEZ Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm				Packaging	
			d	h	D	h1		
			Inside diameter	Inside height	Outside diameter. Ref only	Handle height	Carton quantity	Mini pack quantity
37634741	M22		21.20	19.00	24.51	21.41	1500	
37657711			21.84	19.00	25.40	21.41	1500	300
37660311	M24		23.41	19.00	26.97	22.22	1000	
37677011			25.01	19.00	28.58	22.22	1000	250
37699841	M27		27.53	19.00	30.18	25.40	1000	
37703781			28.19	19.00	31.75	28.58	1000	
37725521	M30		29.85	19.00	33.40	19.05	1000	
37825821			31.24	19.00	34.80	28.58	900	
37854381			34.41	19.00	37.97	28.58	800	
37897531			37.59	19.00	41.15	25.40	800	

Part Number	Fits metric thread	Fits imperial thread	d	h	D	h1	Carton quantity	Mini pack quantity
			Inside diameter	Inside height	Outside diameter. Ref only	Handle height		
			Dimensions in mm				Packaging	



9001
ISO certification

HEZ Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches				Packaging	
			d	h	D	h1		
			Inside diameter	Inside height	Outside diameter. Ref only	Handle height	Carton quantity	Mini pack quantity
37634741	M22		0.835	0.750	0.965	0.843	1500	
37657711			0.860	0.750	1.000	0.843	1500	300
37660311	M24		0.922	0.750	1.062	0.875	1000	
37677011			0.985	0.750	1.125	0.875	1000	250
37699841	M27		1.048	0.750	1.188	1.000	1000	
37703781			1.110	0.750	1.250	1.125	1000	
37725521	M30		1.175	0.750	1.315	0.750	1000	
37825821			1.230	0.750	1.370	1.125	900	
37854381			1.355	0.750	1.495	1.125	800	
37897531			1.480	0.750	1.620	1.000	800	

Part Number	Fits metric thread	Fits imperial thread	d	h	D	h1	Carton quantity	Mini pack quantity
			Inside diameter	Inside height	Outside diameter. Ref only	Handle height		
			Dimensions in inches				Packaging	



9001
ISO certification

HFC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Flat Pull-Tab Cap

The HFC Series flexible flat pull-tab cap provides easy, quick and tool-free removal, masking applications at high temperatures in production environments where fast and frequent access to protected components is a necessity. Each tight-fitting durable cap maintains integrity through multiple reuse to protect the underlying component effectively.

Material: Flex500™ (PVC)
Temperature Resistance: 149°**C** / 300°**F**

***Available in low temperature applications materials**

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm				Packaging	
			d	h	D	h1		
			Inside diameter	Inside height	Outside diameter. Ref only	Handle height	Carton quantity	Mini pack quantity
37303881	M5	10-24 UNC, 10-32 UNF	4.57	12.70	7.11	12.70	5000	
37104331	M5	10-24 UNC, 10-32 UNF	4.57	25.40	7.11	12.70	5000	1000
37120201	M6	12-24 UNC, 12-28 UNF	5.25	12.70	7.80	15.88	5000	
37153521	M6	12-24 UNC, 12-28 UNF	5.25	25.40	7.80	15.88	5000	
37156531		1/4-20 UNC, 1/4-28 UNF	6.09	12.70	8.64	15.88	5000	
37157791		1/4-20 UNC, 1/4-28 UNF	6.09	25.40	8.64	15.88	5000	
37174571	M8	5/16-18 UNC, 5/16-24 UNF	7.67	12.70	10.46	15.88	4000	
37194771	M8	5/16-18 UNC, 5/16-24 UNF	7.67	25.40	10.46	15.88	4000	
37204691	M10	3/8-16 UNC, 3/8-24 UNF	9.27	12.70	12.32	15.88	5000	
37218601	M10	3/8-16 UNC, 3/8-24 UNF	9.27	19.05	12.32	15.88	3000	
37266981	M10	3/8-16 UNC, 3/8-24 UNF	9.27	25.40	12.32	15.88	2500	
37294631			10.05	12.70	12.60	15.88	3000	
37339301			10.05	25.40	12.60	15.88	3000	
37387291			10.41	25.40	13.46	17.45	2000	400
37438871	M12	7/16-14 UNC, 7/16-20 UNF	10.84	12.70	13.39	15.88	3000	
37440421	M12	7/16-14 UNC, 7/16-20 UNF	10.84	25.40	13.39	15.88	2500	500
37471871			11.93	12.70	15.24	15.88	2000	
37489661			11.93	25.40	15.24	15.88	2000	
37495171		1/2-13 UNC, 1/2-20 UNF	12.44	12.70	15.49	15.88	2500	
37495821		1/2-13 UNC, 1/2-20 UNF	12.44	25.40	15.49	15.88	1500	
37520131	M14		13.23	12.70	16.54	15.88	2000	

9001
ISO certification

HFC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches				Packaging	
			d	h	D	h1		
			Inside diameter	Inside height	Outside diameter. Ref only	Handle height	Carton quantity	Mini pack quantity
37303881	M5	10-24 UNC, 10-32 UNF	0.180	0.500	0.280	0.500	5000	
37104331	M5	10-24 UNC, 10-32 UNF	0.180	1.000	0.280	0.500	5000	1000
37120201	M6	12-24 UNC, 12-28 UNF	0.207	0.500	0.307	0.625	5000	
37153521	M6	12-24 UNC, 12-28 UNF	0.207	1.000	0.307	0.625	5000	
37156531		1/4-20 UNC, 1/4-28 UNF	0.240	0.500	0.340	0.625	5000	
37157791		1/4-20 UNC, 1/4-28 UNF	0.240	1.000	0.340	0.625	5000	
37174571	M8	5/16-18 UNC, 5/16-24 UNF	0.302	0.500	0.412	0.625	4000	
37194771	M8	5/16-18 UNC, 5/16-24 UNF	0.302	1.000	0.412	0.625	4000	
37204691	M10	3/8-16 UNC, 3/8-24 UNF	0.365	0.500	0.485	0.625	5000	
37218601	M10	3/8-16 UNC, 3/8-24 UNF	0.365	0.750	0.485	0.625	3000	
37266981	M10	3/8-16 UNC, 3/8-24 UNF	0.365	1.000	0.485	0.625	2500	
37294631			0.396	0.500	0.496	0.625	3000	
37339301			0.396	1.000	0.496	0.625	3000	
37387291			0.410	1.000	0.530	0.687	2000	400
37438871	M12	7/16-14 UNC, 7/16-20 UNF	0.427	0.500	0.527	0.625	3000	
37440421	M12	7/16-14 UNC, 7/16-20 UNF	0.427	1.000	0.527	0.625	2500	500
37471871			0.470	0.500	0.600	0.625	2000	
37489661			0.470	1.000	0.600	0.625	2000	
37495171		1/2-13 UNC, 1/2-20 UNF	0.490	0.500	0.610	0.625	2500	
37495821		1/2-13 UNC, 1/2-20 UNF	0.490	1.000	0.610	0.625	1500	
37520131	M14		0.521	0.500	0.651	0.625	2000	



9001
ISO certification

HFC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm				Packaging	
			d	h	D	h1		
			Inside diameter	Inside height	Outside diameter. Ref only	Handle height	Carton quantity	Mini pack quantity
37525841	M14		13.23	25.40	16.54	15.88	1500	300
37542401	M15		14.02	19.05	17.07	17.45	2000	
37549671	M15		14.02	25.40	17.07	17.45	1500	
37579121			14.98	12.70	18.54	15.88	1500	
37603721			14.98	25.40	18.54	15.88	1500	300
37626701	M16	5/8-11 UNC, 5/8-18 UNF	15.62	25.40	19.18	17.45	2000	
37628251	M20		17.19	12.70	20.75	17.45	1000	
37644681	M20		17.19	25.40	20.75	17.45	1000	200
37684861			18.66	12.70	22.23	20.63	1000	
37696801			18.66	19.05	22.23	20.63	1250	
37710861			18.66	25.40	22.23	20.63	1000	
37729451			20.24	12.70	23.80	20.63	900	
37740051			20.24	25.40	23.80	20.63	900	180
37775341			21.97	12.70	25.53	21.41	1000	
37790731			21.97	25.40	25.53	21.41	2500	
37797361			25.14	12.70	28.70	22.23	600	
37818531			25.14	25.40	28.70	22.23	600	120
37847981			31.24	25.40	34.80	28.58	500	
37854231			31.24	38.10	34.80	28.58	500	
37906181			40.76	25.40	44.58	31.75	400	
37916401			40.76	38.10	44.58	31.75	400	





9001
ISO certification

Part Number	Fits metric thread	Fits imperial thread	d	h	D	h1	Carton quantity	Mini pack quantity
			Inside diameter	Inside height	Outside diameter. Ref only	Handle height		
			Dimensions in mm				Packaging	

HFC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches				Packaging	
			d	h	D	h1		
			Inside diameter	Inside height	Outside diameter. Ref only	Handle height	Carton quantity	Mini pack quantity
37525841	M14		0.521	1.000	0.651	0.625	1500	300
37542401	M15		0.552	0.750	0.672	0.687	2000	
37549671	M15		0.552	1.000	0.672	0.687	1500	
37579121			0.590	0.500	0.730	0.625	1500	
37603721			0.590	1.000	0.730	0.625	1500	300
37626701	M16	5/8-11 UNC, 5/8-18 UNF	0.615	1.000	0.755	0.687	2000	
37628251	M20		0.677	0.500	0.817	0.687	1000	
37644681	M20		0.677	1.000	0.817	0.687	1000	200
37684861			0.735	0.500	0.875	0.812	1000	
37696801			0.735	0.750	0.875	0.812	1250	
37710861			0.735	1.000	0.875	0.812	1000	
37729451			0.797	0.500	0.937	0.812	900	
37740051			0.797	1.000	0.937	0.812	900	180
37775341			0.865	0.500	1.005	0.843	1000	
37790731			0.865	1.000	1.005	0.843	2500	
37797361			0.990	0.500	1.130	0.875	600	
37818531			0.990	1.000	1.130	0.875	600	120
37847981			1.230	1.000	1.370	1.125	500	
37854231			1.230	1.500	1.370	1.125	500	
37906181			1.605	1.000	1.755	1.250	400	
37916401			1.605	1.500	1.755	1.250	400	





9001
ISO certification

Part Number	Fits metric thread	Fits imperial thread	d	h	D	h1	Carton quantity	Mini pack quantity
			Inside diameter	Inside height	Outside diameter. Ref only	Handle height		
			Dimensions in inches				Packaging	

TS Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Tapered Cap

The TS Series cap offers two different hardness options. The more rigid version enables a firmer, seal-maintaining shape under pressure and in tight spaces. The more flexible alternative is highly adaptable to irregular shapes and delicate surfaces. A shared tapered design is easy to apply, offering versatility across different hole dimensions.

Material: Silicone (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Can also be used as a plug**

Red (-**RD**)
RAL 3024

Clear (-**CL**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Hardness (shore)	Colour	Dimensions in mm						Packaging	
			d	d1	H	D2	D	D1	Carton quantity	Mini pack quantity
			Inside diameter	Inside diameter	Outside height	Flange diameter	Outside diameter	Outside diameter		
15108161	70	Red	3.05	1.35	9.65	8.38	4.62	2.95	5000	1000
15109561	45	Natural	3.05	1.35	9.65	8.38	4.62	2.95	5000	1000
15154841	70	Red	4.50	2.82	9.65	10.16	6.10	4.39	5000	1000
15160841	45	Natural	4.50	2.82	9.65	10.16	6.10	4.39	5000	1000
15181081	70	Red	6.10	4.42	9.65	11.68	7.49	6.10	5000	1000
15190901	45	Natural	6.10	4.42	9.65	11.68	7.49	6.10	5000	1000
15205711	70	Red	7.67	5.97	9.65	13.21	9.27	7.59	5000	1000
15215661	45	Natural	7.67	5.97	9.65	13.21	9.27	7.59	5000	1000
15220381	70	Red	7.75	6.68	4.83	12.70	9.32	8.26	5000	
15221251	70	Red	9.27	7.57	9.65	14.73	10.62	9.17	5000	1000
15235351	45	Natural	9.27	7.57	9.65	14.73	10.62	9.17	5000	1000
15246631	70	Red	10.72	9.04	9.65	16.51	12.32	10.64	5000	1000
15263261	45	Natural	10.72	9.04	9.65	16.51	12.32	10.64	5000	1000
15275211	70	Red	12.32	10.39	11.18	18.03	13.61	11.96	5000	1000
15280821	45	Natural	12.32	10.39	11.18	18.03	13.61	11.96	5000	1000
15320831	70	Red	13.84	11.89	11.18	19.56	15.44	13.51	5000	1000
15333361	45	Natural	13.84	11.89	11.18	19.56	15.44	13.51	5000	1000
15359521	70	Red	15.37	13.16	12.70	21.08	16.94	14.73	5000	1000
15371281	45	Natural	15.37	13.16	12.70	21.08	16.94	14.73	5000	1000
15372341	70	Red	16.87	14.68	12.70	22.86	18.47	16.26	5000	1000
15393211	45	Natural	16.87	14.68	12.70	22.86	18.47	16.26	5000	1000
15393991	70	Red	18.44	15.95	14.22	24.38	20.02	17.53	5000	1000

9001
ISO certification

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

TS Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Hardness (shore)	Colour	Dimensions in inches						Packaging	
			d	d1	H	D2	D	D1	Carton quantity	Mini pack quantity
			Inside diameter	Inside diameter	Outside height	Flange diameter	Outside diameter	Outside diameter		
15108161	70	Red	0.120	0.053	0.380	0.330	0.182	0.116	5000	1000
15109561	45	Natural	0.120	0.053	0.380	0.330	0.182	0.116	5000	1000
15154841	70	Red	0.177	0.111	0.380	0.400	0.240	0.173	5000	1000
15160841	45	Natural	0.177	0.111	0.380	0.400	0.240	0.173	5000	1000
15181081	70	Red	0.240	0.174	0.380	0.460	0.295	0.240	5000	1000
15190901	45	Natural	0.240	0.174	0.380	0.460	0.295	0.240	5000	1000
15205711	70	Red	0.302	0.235	0.380	0.520	0.365	0.299	5000	1000
15215661	45	Natural	0.302	0.235	0.380	0.520	0.365	0.299	5000	1000
15220381	70	Red	0.305	0.263	0.190	0.500	0.367	0.325	5000	
15221251	70	Red	0.365	0.298	0.380	0.580	0.418	0.361	5000	1000
15235351	45	Natural	0.365	0.298	0.380	0.580	0.418	0.361	5000	1000
15246631	70	Red	0.422	0.356	0.380	0.650	0.485	0.419	5000	1000
15263261	45	Natural	0.422	0.356	0.380	0.650	0.485	0.419	5000	1000
15275211	70	Red	0.485	0.409	0.440	0.710	0.536	0.471	5000	1000
15280821	45	Natural	0.485	0.409	0.440	0.710	0.536	0.471	5000	1000
15320831	70	Red	0.545	0.468	0.440	0.770	0.608	0.532	5000	1000
15333361	45	Natural	0.545	0.468	0.440	0.770	0.608	0.532	5000	1000
15359521	70	Red	0.605	0.518	0.500	0.830	0.667	0.580	5000	1000
15371281	45	Natural	0.605	0.518	0.500	0.830	0.667	0.580	5000	1000
15372341	70	Red	0.664	0.578	0.500	0.900	0.727	0.640	5000	1000
15393211	45	Natural	0.664	0.578	0.500	0.900	0.727	0.640	5000	1000
15393991	70	Red	0.726	0.628	0.560	0.960	0.788	0.690	5000	1000



9001
ISO certification

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

TS Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Hardness (shore)	Colour	Dimensions in mm						Packaging	
			d	d1	H	D2	D	D1	Carton quantity	Mini pack quantity
			Inside diameter	Inside diameter	Outside height	Flange diameter	Outside diameter	Outside diameter		
15413371	45	Natural	18.44	15.95	14.22	24.38	20.02	17.53	5000	1000
15419401	70	Red	19.94	17.45	14.22	25.91	21.54	19.05	5000	1000
15425511	45	Natural	19.94	17.45	14.22	25.91	21.54	19.05	5000	1000
15468221	70	Red	21.56	18.80	16.00	27.43	23.14	20.37	5000	1000
15520511	45	Natural	21.56	18.80	16.00	27.43	23.14	20.37	5000	1000
15545481	70	Red	23.16	20.40	16.00	29.21	24.77	22.00	5000	1000
15554521	45	Natural	23.16	20.40	16.00	29.21	24.77	22.00	5000	1000
15575331	70	Red	26.09	22.89	19.05	32.26	27.69	24.49	2500	500
15614911	45	Natural	26.09	22.89	19.05	32.26	27.69	24.49	2500	500
15644531	70	Red	29.26	26.19	19.05	36.32	30.86	27.79	2500	500
15646601	70	Red	32.82	29.49	19.05	38.61	34.42	31.09	2500	500
15660531	45	Natural	32.82	29.49	19.05	38.61	34.42	31.09	2500	500
15667591	70	Red	35.61	31.72	22.35	41.91	37.21	33.32	1000	200
15696131	45	Natural	35.61	31.72	22.35	41.91	37.21	33.32	1000	200
15715751	70	Red	39.04	35.15	22.35	44.96	40.64	36.75	1000	200
15717211	45	Natural	39.04	35.15	22.35	44.96	40.64	36.75	1000	200
15718371	70	Red	41.15	38.05	19.05	48.26	42.72	39.62	1000	200
15731691	45	Natural	41.15	38.05	19.05	48.26	42.72	39.62	1000	200
15734481	70	Red	46.18	42.88	25.40	51.31	47.75	44.45	1000	200
15806041	45	Natural	46.18	42.88	25.40	51.31	47.75	44.45	1000	200
15809921	70	Red	47.96	43.64	25.40	54.61	49.53	45.21	1000	200
15809961	45	Natural	47.96	43.64	25.40	54.61	49.53	45.21	1000	200
15811631	70	Red	51.13	46.66	25.40	57.66	52.73	48.26	1000	200
15828621	45	Natural	51.13	46.66	25.40	57.66	52.73	48.26	1000	200
15872951	70	Red	54.69	50.19	25.40	59.94	56.13	51.69	1000	200
15887101	70	Red	60.27	55.78	25.40	65.53	61.72	57.28	1000	200
15913281	70	Red	67.13	62.64	25.40	72.39	68.58	64.14	1000	200
15933031	70	Red	73.23	68.73	25.40	78.49	74.68	70.23	1000	200
Part Number	Hardness (shore)	Colour	d	d1	H	D2	D	D1	Carton quantity	Mini pack quantity
			Inside diameter	Inside diameter	Outside height	Flange diameter	Outside diameter	Outside diameter		
			Dimensions in mm						Packaging	



9001
ISO certification

TS Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Hardness (shore)	Colour	Dimensions in inches						Packaging	
			d	d1	H	D2	D	D1	Carton quantity	Mini pack quantity
			Inside diameter	Inside diameter	Outside height	Flange diameter	Outside diameter	Outside diameter		
15413371	45	Natural	0.726	0.628	0.560	0.960	0.788	0.690	5000	1000
15419401	70	Red	0.785	0.687	0.560	1.020	0.848	0.750	5000	1000
15425511	45	Natural	0.785	0.687	0.560	1.020	0.848	0.750	5000	1000
15468221	70	Red	0.849	0.740	0.630	1.080	0.911	0.802	5000	1000
15520511	45	Natural	0.849	0.740	0.630	1.080	0.911	0.802	5000	1000
15545481	70	Red	0.912	0.803	0.630	1.150	0.975	0.866	5000	1000
15554521	45	Natural	0.912	0.803	0.630	1.150	0.975	0.866	5000	1000
15575331	70	Red	1.027	0.901	0.750	1.270	1.090	0.964	2500	500
15614911	45	Natural	1.027	0.901	0.750	1.270	1.090	0.964	2500	500
15644531	70	Red	1.152	1.031	0.750	1.430	1.215	1.094	2500	500
15646601	70	Red	1.292	1.161	0.750	1.520	1.355	1.224	2500	500
15660531	45	Natural	1.292	1.161	0.750	1.520	1.355	1.224	2500	500
15667591	70	Red	1.402	1.249	0.880	1.650	1.465	1.312	1000	200
15696131	45	Natural	1.402	1.249	0.880	1.650	1.465	1.312	1000	200
15715751	70	Red	1.537	1.384	0.880	1.770	1.600	1.447	1000	200
15717211	45	Natural	1.537	1.384	0.880	1.770	1.600	1.447	1000	200
15718371	70	Red	1.620	1.498	0.750	1.900	1.682	1.560	1000	200
15731691	45	Natural	1.620	1.498	0.750	1.900	1.682	1.560	1000	200
15734481	70	Red	1.818	1.688	0.750	2.020	1.880	1.750	1000	200
15806041	45	Natural	1.818	1.688	0.750	2.020	1.880	1.750	1000	200
15809921	70	Red	1.888	1.718	1.000	2.150	1.950	1.780	1000	200
15809961	45	Natural	1.888	1.718	1.000	2.150	1.950	1.780	1000	200
15811631	70	Red	2.013	1.837	1.000	2.270	2.076	1.900	1000	200
15828621	45	Natural	2.013	1.837	1.000	2.270	2.076	1.900	1000	200
15872951	70	Red	2.153	1.976	1.000	2.360	2.210	2.035	1000	200
15887101	70	Red	2.373	2.196	1.000	2.580	2.430	2.255	1000	200
15913281	70	Red	2.643	2.466	1.000	2.850	2.700	2.525	1000	200
15933031	70	Red	2.883	2.706	1.000	3.090	2.940	2.765	1000	200
Part Number	Hardness (shore)	Colour	d	d1	H	D2	D	D1	Carton quantity	Mini pack quantity
			Inside diameter	Inside diameter	Outside height	Flange diameter	Outside diameter	Outside diameter		
			Dimensions in inches						Packaging	



9001
ISO certification

TSV Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Vented Cap

The TSV Series vented tapered cap has a mechanism to reduce internal pressure build-up during coating and curing operations. Performance prevents dislodging or coating defects caused by pressure changes. The cap works at temperatures where standard plastic tapers could fail and offers firm or flexible variants. Some products can be used as a plug.

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Also available without a vent**

Clear (-**CL**)
RAL 9003

Red (-**RD**)
RAL 3024

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Hardness (shore)	Colour	Dimensions in mm						Packaging
			d	d1	H	D2	D	D1	
			Inside diameter	Inside diameter	Outside height	Flange diameter	Outside diameter	Outside diameter	Carton quantity
15115321	70	Red	3.05	1.35	9.65	8.38	4.62	2.95	5000
15130451	45	Natural	3.05	1.35	9.65	8.38	4.62	2.95	5000
15134621	70	Red	4.50	2.82	9.65	10.16	6.10	4.39	5000
15199281	45	Natural	4.50	2.82	9.65	10.16	6.10	4.39	5000
15214501	70	Red	6.10	4.42	9.65	11.68	7.49	6.10	5000
15218481	45	Natural	6.10	4.42	9.65	11.68	7.49	6.10	5000
15219131	70	Red	7.67	5.97	9.65	13.21	9.27	7.59	5000
15224511	45	Natural	7.67	5.97	9.65	13.21	9.27	7.59	5000
15255331	70	Red	9.27	7.57	9.65	14.73	10.62	9.17	5000
15259051	45	Natural	9.27	7.57	9.65	14.73	10.62	9.17	5000
15276751	70	Red	10.72	9.04	9.65	16.51	12.32	10.64	5000
15300811	45	Natural	10.72	9.04	9.65	16.51	12.32	10.64	5000
15305911	70	Red	12.32	10.39	11.18	18.03	13.61	11.96	5000
15348751	45	Natural	12.32	10.39	11.18	18.03	13.61	11.96	5000
15357411	70	Red	13.84	11.89	11.18	19.56	15.44	13.51	5000
15364461	45	Natural	13.84	11.89	11.18	19.56	15.44	13.51	5000
15366271	70	Red	15.37	13.16	12.70	21.08	16.94	14.73	5000
15380281	45	Natural	15.37	13.16	12.70	21.08	16.94	14.73	5000
15393081	70	Red	16.87	14.68	12.70	22.86	18.47	16.26	5000
15405281	45	Natural	16.87	14.68	12.70	22.86	18.47	16.26	5000
15414361	70	Red	18.44	15.95	14.22	23.38	20.02	17.53	5000
15418561	45	Natural	18.44	15.95	14.22	23.38	20.02	17.53	5000

9001
ISO certification

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

TSV Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Hardness (shore)	Colour	Dimensions in inches						Packaging
			d	d1	H	D2	D	D1	
			Inside diameter	Inside diameter	Outside height	Flange diameter	Outside diameter	Outside diameter	Carton quantity
15115321	70	Red	0.120	0.053	0.380	0.330	0.182	0.116	5000
15130451	45	Natural	0.120	0.053	0.380	0.330	0.182	0.116	5000
15134621	70	Red	0.177	0.111	0.380	0.400	0.240	0.173	5000
15199281	45	Natural	0.177	0.111	0.380	0.400	0.240	0.173	5000
15214501	70	Red	0.240	0.174	0.380	0.460	0.295	0.240	5000
15218481	45	Natural	0.240	0.174	0.380	0.460	0.295	0.240	5000
15219131	70	Red	0.302	0.235	0.380	0.520	0.365	0.299	5000
15224511	45	Natural	0.302	0.235	0.380	0.520	0.365	0.299	5000
15255331	70	Red	0.365	0.298	0.380	0.580	0.418	0.361	5000
15259051	45	Natural	0.365	0.298	0.380	0.580	0.418	0.361	5000
15276751	70	Red	0.422	0.356	0.380	0.650	0.485	0.419	5000
15300811	45	Natural	0.422	0.356	0.380	0.650	0.485	0.419	5000
15305911	70	Red	0.485	0.409	0.440	0.710	0.536	0.471	5000
15348751	45	Natural	0.485	0.409	0.440	0.710	0.536	0.471	5000
15357411	70	Red	0.545	0.468	0.440	0.770	0.608	0.532	5000
15364461	45	Natural	0.545	0.468	0.440	0.770	0.608	0.532	5000
15366271	70	Red	0.605	0.518	0.500	0.830	0.667	0.580	5000
15380281	45	Natural	0.605	0.518	0.500	0.830	0.667	0.580	5000
15393081	70	Red	0.664	0.578	0.500	0.900	0.727	0.640	5000
15405281	45	Natural	0.664	0.578	0.500	0.900	0.727	0.640	5000
15414361	70	Red	0.726	0.628	0.560	0.960	0.788	0.690	5000
15418561	45	Natural	0.726	0.628	0.560	0.960	0.788	0.690	5000

9001
ISO certification

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

TSV Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Hardness (shore)	Colour	Dimensions in mm						Packaging
			d	d1	H	D2	D	D1	
			Inside diameter	Inside diameter	Outside height	Flange diameter	Outside diameter	Outside diameter	Carton quantity
15428061	70	Red	19.94	17.45	14.22	25.91	21.54	19.05	5000
15428271	45	Natural	19.94	17.45	14.22	25.91	21.54	19.05	5000
15437341	70	Red	21.56	18.80	16.00	27.43	23.14	20.37	5000
15448681	45	Natural	21.56	18.80	16.00	27.43	23.14	20.37	5000
15450901	70	Red	23.16	20.40	16.00	29.21	24.77	22.00	5000
15454251	45	Natural	23.16	20.40	16.00	29.21	24.77	22.00	5000
15487241	70	Red	26.09	22.89	19.05	32.26	27.69	24.49	2500
15492211	45	Natural	26.09	22.89	19.05	32.26	27.69	24.49	2500
15493061	70	Red	29.26	26.19	19.05	36.32	30.86	27.79	2500
15549101	45	Natural	29.26	26.19	19.05	36.32	30.86	27.79	2500
15566671	70	Red	32.82	29.49	19.05	38.61	34.42	31.09	2500
15581541	45	Natural	32.82	29.49	19.05	38.61	34.42	31.09	2500
15592441	70	Red	35.61	31.72	22.35	41.91	37.21	33.32	1000
15597881	45	Natural	35.61	31.72	22.35	41.91	37.21	33.32	1000
15610291	70	Red	39.04	35.15	22.35	44.96	40.64	36.75	1000
15611241	45	Natural	39.04	35.15	22.35	44.96	40.64	36.75	1000
15646191	70	Red	41.15	38.05	19.05	48.26	42.72	39.62	1000
15648021	45	Natural	41.15	38.05	19.05	48.26	42.72	39.62	1000
15672011	70	Red	46.18	42.88	19.05	51.31	47.75	44.45	1000
15685771	45	Natural	46.18	42.88	19.05	51.31	47.75	44.45	1000
15719441	70	Red	47.96	43.64	25.40	54.61	49.53	45.21	1000
15723421	45	Natural	47.96	43.64	25.40	54.61	49.53	45.21	1000
15728581	70	Red	51.13	46.66	25.40	57.66	52.73	48.26	1000
15731731	45	Natural	51.13	46.66	25.40	57.66	52.73	48.26	1000
15734801	70	Red	54.69	50.19	25.40	59.94	56.13	51.69	200
15752601	45	Natural	54.69	50.19	25.40	59.94	56.13	51.69	200
15752631	70	Red	60.27	55.78	25.40	65.53	61.72	57.28	1000
15807761	45	Natural	60.27	55.78	25.40	65.53	61.72	57.28	1000
15818201	70	Red	67.13	62.64	25.40	72.39	68.58	64.14	1000
15823761	45	Natural	67.13	62.64	25.40	72.39	68.58	64.14	1000
15834081	70	Red	73.23	68.73	25.40	78.49	74.68	70.23	1000
15835661	45	Natural	73.23	68.73	25.40	78.49	74.68	70.23	1000
Part Number	Hardness (shore)	Colour	d	d1	H	D2	D	D1	Carton quantity
			Inside diameter	Inside diameter	Outside height	Flange diameter	Outside diameter	Outside diameter	
			Dimensions in mm						Packaging



9001
ISO certification

TSV Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Hardness (shore)	Colour	Dimensions in inches						Packaging
			d	d1	H	D2	D	D1	
			Inside diameter	Inside diameter	Outside height	Flange diameter	Outside diameter	Outside diameter	Carton quantity
15428061	70	Red	0.785	0.687	0.560	1.020	0.848	0.750	5000
15428271	45	Natural	0.785	0.687	0.560	1.020	0.848	0.750	5000
15437341	70	Red	0.849	0.740	0.630	1.080	0.911	0.802	5000
15448681	45	Natural	0.849	0.740	0.630	1.080	0.911	0.802	5000
15450901	70	Red	0.912	0.803	0.630	1.150	0.975	0.866	5000
15454251	45	Natural	0.912	0.803	0.630	1.150	0.975	0.866	5000
15487241	70	Red	1.027	0.901	0.750	1.270	1.090	0.964	2500
15492211	45	Natural	1.027	0.901	0.750	1.270	1.090	0.964	2500
15493061	70	Red	1.152	1.031	0.750	1.430	1.215	1.094	2500
15549101	45	Natural	1.152	1.031	0.750	1.430	1.215	1.094	2500
15566671	70	Red	1.292	1.161	0.750	1.520	1.355	1.224	2500
15581541	45	Natural	1.292	1.161	0.750	1.520	1.355	1.224	2500
15592441	70	Red	1.402	1.249	0.880	1.650	1.465	1.312	1000
15597881	45	Natural	1.402	1.249	0.880	1.650	1.465	1.312	1000
15610291	70	Red	1.537	1.384	0.880	1.770	1.600	1.447	1000
15611241	45	Natural	1.537	1.384	0.880	1.770	1.600	1.447	1000
15646191	70	Red	1.620	1.498	0.750	1.900	1.682	1.560	1000
15648021	45	Natural	1.620	1.498	0.750	1.900	1.682	1.560	1000
15672011	70	Red	1.818	1.688	0.750	2.020	1.880	1.750	1000
15685771	45	Natural	1.818	1.688	0.750	2.020	1.880	1.750	1000
15719441	70	Red	1.888	1.718	1.000	2.150	1.950	1.780	1000
15723421	45	Natural	1.888	1.718	1.000	2.150	1.950	1.780	1000
15728581	70	Red	2.013	1.837	1.000	2.270	2.076	1.900	1000
15731731	45	Natural	2.013	1.837	1.000	2.270	2.076	1.900	1000
15734801	70	Red	2.153	1.976	1.000	2.360	2.210	2.035	200
15752601	45	Natural	2.153	1.976	1.000	2.360	2.210	2.035	200
15752631	70	Red	2.373	2.196	1.000	2.580	2.430	2.255	1000
15807761	45	Natural	2.373	2.196	1.000	2.580	2.430	2.255	1000
15818201	70	Red	2.643	2.466	1.000	2.850	2.700	2.525	1000
15823761	45	Natural	2.643	2.466	1.000	2.850	2.700	2.525	1000
15834081	70	Red	2.883	2.706	1.000	3.090	2.940	2.765	1000
15835661	45	Natural	2.883	2.706	1.000	3.090	2.940	2.765	1000
Part Number	Hardness (shore)	Colour	d	d1	H	D2	D	D1	Carton quantity
			Inside diameter	Inside diameter	Outside height	Flange diameter	Outside diameter	Outside diameter	
			Dimensions in inches						Packaging



9001
ISO certification

UVCP-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Vented Cap

The UVCP-SH Series venting cap has a flange head design and a built-in nipple for puncture or removal to create a vent. Useful in high temperature finishing operations for plain and threaded studs and holes, the vent releases any trapped gases to minimise defects and rework. The internal lip forms a positive precision seal against contaminants.

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Stays watertight if the venting feature is not removed**

R. Red (-**RR**)
RAL 2010

Blue (-**BL**)
RAL 5002

Green (-**GN**)
RAL 6032

Yellow (-**YL**)
RAL 1016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm		Dimensions in inches		Packaging
		d1	h	d1	h	Quantity per bag
		Inside diameter	Inside height	Inside diameter	Inside height	
15157764	Yellow	5.94	25.40	0.450	1.000	250
15293954	Green	9.02	38.10	0.565	1.500	250
15585634	Blue	12.70	38.10	0.750	1.500	100
15999344	Rusty Red	25.40	38.10	1.250	1.500	50

Part Number	Colour	d1	h	d1	h	Quantity per bag
		Inside diameter	Inside height	Inside diameter	Inside height	
		Dimensions in mm		Dimensions in inches		Packaging

9001
ISO certification

SFC Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Flange Cap

The SFC Series flange cap's design incorporates an internal lip that creates a positive seal to exclude contaminants. The cap top's flange head forms a handle to enable quicker application and removal than a standard cap provides, tool-free. Highly flexible and durable, this cap withstands repeated use and retains shape and functionality over time.

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Available in low temperature applications materials**

Clear (-**CL**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm		Dimensions in inches		Packaging	
		d	h	d	h	Carton quantity	Mini pack quantity
		Inside diameter	Inside height	Inside diameter	Inside height		
15232901	Natural	4.75	34.98	0.187	1.377	500	100
15482931	Natural	5.94	50.80	0.234	2.000	500	100
15502161	Natural	7.47	33.78	0.294	1.330	500	100
15675401	Natural	8.00	24.74	0.315	0.974	250	50
15697581	Natural	9.53	36.09	0.375	1.421	100	20
15780151	Natural	15.44	29.97	0.608	1.180	100	20

Part Number	Colour	d	h	d	h	Carton quantity	Mini pack quantity
		Inside diameter	Inside height	Inside diameter	Inside height		
		Dimensions in mm		Dimensions in inches		Packaging	

9001
ISO certification

Masking Plugs

When In-production Sealing is Critical

Caplugs masking plugs are designed to effectively seal holes or openings during surface treatment processes such as painting, coating, and electroplating. Precise isolation only of areas and assemblies that need to remain untreated prevents contamination and ensures a clean finish.

Functionality is enhanced by an ease of insertion and removal that is particularly useful in fast-paced production environments where time is critical. A precise tailored fit accurately guards against leakage of treatment materials, to maintain high-quality standards of finish.

In industries such as automotive assembly, electronics manufacturing, and metal fabrication, where precision finishing is a priority, masking plugs contribute significantly to consistent, contaminant-free finishes. Robust reliability gives them a critical role in quality assurance on the production line.

More details about these products on our website

UP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Tapered Plug

The UP-SH Series plug is tapered to mask both plain and threaded holes snugly and reliably, with edge-of-plug precision, across industrial finishing processes. Integrity is constant at high temperatures where standard materials could deform, while easy handling and multiple reuse before replacement contribute to efficiency and cost-effectiveness.

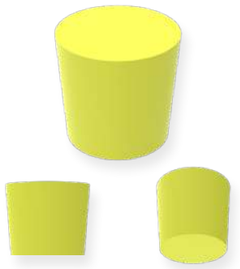



Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Available in low temperature applications materials**

Also available in: Black (-**BK**) RAL 9005, White (-**WT**) RAL 9016


Yellow (-**YL**) RAL 1016

Red (-**RD**) RAL 3018


Blue (-**BL**) RAL 5002


Green (-**GN**) RAL 6024

Pink (-**PK**) RAL 4003

Purple (-**PL**) RAL 4008

Clear (-**CL**) RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm			Dimensions in inches			Packaging
		D	D1	H	D	D1	H	
		Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	Quantity per bag
21120964	Clear	0.41	1.57	15.88	0.016	0.062	0.625	1000
21124804	Clear	0.51	1.98	19.05	0.020	0.078	0.750	1000
21128854	Clear	0.79	2.54	25.40	0.031	0.100	1.000	1000
21145004	Clear	0.79	3.18	15.88	0.031	0.125	0.625	1000
21175384	Clear	1.27	5.00	27.94	0.050	0.197	1.100	1000
21203154	Green	1.60	3.18	15.88	0.063	0.125	0.625	1000
21229894	Clear	1.60	3.18	15.88	0.063	0.125	0.625	1000
21256414	Pink	1.60	4.78	15.88	0.063	0.188	0.625	1000
21259304	Clear	1.60	4.78	15.88	0.063	0.188	0.625	1000
21261014	Clear	1.60	5.08	19.05	0.063	0.200	0.750	1000
21271044	Black	2.03	4.78	15.88	0.080	0.188	0.625	1000
21281564	Black	3.18	6.35	19.05	0.125	0.250	0.750	1000
21287244	Clear	3.18	6.35	19.05	0.125	0.250	0.750	1000
21300504	Clear	3.18	9.53	31.75	0.125	0.375	1.250	1000
21363244	Black	3.81	6.35	15.88	0.150	0.250	0.625	1000
21373194	Red	4.78	8.74	15.88	0.188	0.344	0.625	1000
21383124	Clear	4.78	8.74	15.88	0.188	0.344	0.625	1000
21385054	Yellow	6.35	9.53	19.05	0.250	0.375	0.750	100
21386974	Clear	6.35	9.53	19.05	0.250	0.375	0.750	100
21462864	White	6.35	9.53	12.70	0.250	0.375	0.500	100
21464494	Clear	6.35	9.53	12.70	0.250	0.375	0.500	100
21487214	Clear	7.92	12.70	25.40	0.312	0.500	1.000	100



9001
ISO certification

UP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm			Dimensions in inches			Packaging
		D	D1	H	D	D1	H	
		Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	Quantity per bag
21505974	Clear	8.74	11.91	20.65	0.344	0.469	0.813	100
21516534	Clear	8.74	12.70	20.65	0.344	0.500	0.813	100
21519074	Clear	8.89	11.99	19.05	0.350	0.472	0.750	100
21527864	Purple	10.31	15.09	25.40	0.406	0.594	1.000	100
21529154	Clear	10.31	15.09	25.40	0.406	0.594	1.000	100
21537324	Green	11.13	15.88	22.23	0.438	0.625	0.875	100
21561954	Clear	11.13	15.88	22.23	0.438	0.625	0.875	100
21568184	Clear	11.13	17.45	25.40	0.438	0.687	1.000	100
21595324	Pink	12.70	16.66	25.40	0.500	0.656	1.000	100
21614594	Black	14.30	19.05	25.40	0.563	0.750	1.000	100
21619204	Clear	14.30	19.05	25.40	0.563	0.750	1.000	100
21620144	Red	15.88	19.84	25.40	0.625	0.781	1.000	100
21621594	Clear	15.88	19.84	25.40	0.625	0.781	1.000	100
21699364	Yellow	18.26	23.83	25.40	0.719	0.938	1.000	100
21715504	Clear	18.26	23.83	25.40	0.719	0.938	1.000	100
21762954	Clear	19.05	25.40	25.40	0.750	1.000	1.000	100
21762974	Clear	19.81	25.40	25.40	0.780	1.000	1.000	100
21768584	Green	23.01	27.00	25.40	0.906	1.063	1.000	100
21778474	Clear	23.01	27.00	25.40	0.906	1.063	1.000	100
21780484	Clear	23.83	27.99	25.40	0.938	1.102	1.000	100
21799614	Green	26.19	31.75	25.40	1.031	1.250	1.000	100
21813844	Clear	26.19	31.75	25.40	1.031	1.250	1.000	100
21821134	Blue	30.18	36.53	25.40	1.188	1.438	1.000	50
21832874	Clear	31.75	38.89	25.40	1.250	1.531	1.000	100
21854164	Clear	33.35	41.28	25.40	1.313	1.625	1.000	25
21872514	Red	37.31	44.45	25.40	1.469	1.750	1.000	25
21880714	Clear	41.28	50.01	25.40	1.625	1.969	1.000	25
21906424	Clear	44.45	52.40	25.40	1.750	2.063	1.000	50
21921124	Blue	47.63	55.96	25.40	1.875	2.203	1.000	25
21921674	Clear	50.01	62.71	25.40	1.969	2.469	1.000	100
21923914	Red	53.98	63.50	25.40	2.125	2.500	1.000	25

Part Number	Colour	D	D1	H	D	D1	H	Quantity per bag
		Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	
		Dimensions in mm			Dimensions in inches			Packaging





9001
ISO certification

HUP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Hollow Plug

The HUP-SH Series plug's hollow design is lighter and more pliable than solid plugs, conforming securely in particular to irregular or complex component geometry. The plug enables easy handling with firm grip aiding quick change and efficient masking process. The construction material works at high temperatures and in harsh environmental conditions.



Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Solid versions and versions with a handle are also available**

Green (-**GN**)
RAL 6032

Blue (-**BL**)
RAL 5002

R. Red (-**RR**)
RAL 2010

Pink (-**PK**)
RAL 4003

Purple (-**PL**)
RAL 4008

Red (-**RD**)
RAL 3018

Yellow (-**YL**)
RAL 1016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm					Dimensions in inches					Packaging
		D	D1	H	d	h	D	D1	H	d	h	
		Outside diameter	Outside diameter	Height	Inside diameter	Inside height	Outside diameter	Outside diameter	Height	Inside diameter	Inside height	Quantity per bag
21225694	Green	23.01	27.00	25.40	10.31	19.05	0.906	1,063	1,000	0.406	0.750	100
21234094	Pink	24.36	28.17	25.40	11.94	17.78	0.959	1,109	1,000	0.470	0.700	100
21243224	Green	26.19	31.75	25.40	13.49	19.05	1,031	1,250	1,000	0.531	0.750	100
21246844	Yellow	28.58	34.14	25.40	15.24	19.05	1,125	1,344	1,000	0.600	0.750	100
21272164	Blue	30.15	36.50	25.40	13.49	19.05	1,187	1,437	1,000	0.531	0.750	100
21333494	White	30.15	38.10	25.40	17.27	19.05	1,187	1,500	1,000	0.680	0.750	100
21339614	Blue	33.35	41.28	25.40	20.65	19.05	1,313	1,625	1,000	0.813	0.750	100
21358894	Pink	35.71	42.88	25.40	22.86	19.05	1,406	1,688	1,000	0.900	0.750	100
21372924	Red	37.31	44.45	25.40	24.61	19.05	1,469	1,750	1,000	0.969	0.750	100
21382274	Green	38.10	46.05	25.40	25.40	19.05	1,500	1,813	1,000	1,000	0.750	50
21399924	Clear	41.28	50.01	25.40	28.58	19.05	1,625	1,969	1,000	1,125	0.750	50
21402264	Yellow	44.45	52.83	25.40	30.48	19.05	1,750	2,080	1,000	1,200	0.750	50
21429014	Blue	47.63	55.96	25.40	34.93	19.05	1,875	2,203	1,000	1,375	0.750	50
21507184	Green	50.80	62.71	25.40	31.75	15.88	2,000	2,469	1,000	1,250	0.625	50
21541924	Red	54.00	63.50	25.40	34.93	15.88	2,126	2,500	1,000	1,375	0.625	50
21556934	Blue	57.94	68.25	25.40	38.89	15.88	2,281	2,687	1,000	1,531	0.625	50
21584844	Purple	61.90	75.01	34.93	42.85	25.40	2,437	2,953	1,375	1,687	1,000	50
21614184	Green	68.00	81.99	38.10	42.60	25.40	2,677	3,228	1,500	1,677	1,000	10
21698584	White	76.20	88.90	38.10	50.80	25.40	3,000	3,500	1,500	2,000	1,000	10
21712934	Rusty Red	82.55	101.60	38.10	57.15	25.40	3,250	4,000	1,500	2,250	1,000	10

9001
ISO certification

HUP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Clear (-**CL**)
RAL 9003

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm					Dimensions in inches					Packaging
		D	D1	H	d	h	D	D1	H	d	h	
		Outside diameter	Outside diameter	Height	Inside diameter	Inside height	Outside diameter	Outside diameter	Height	Inside diameter	Inside height	Quantity per bag
21770584	Clear	88.90	127.00	50.80	63.50	38.10	3,500	5,000	2,000	2,500	1,500	5

Part Number	Colour	D	D1	H	d	h	D	D1	H	d	h	Quantity per bag
		Outside diameter	Outside diameter	Height	Inside diameter	Inside height	Outside diameter	Outside diameter	Height	Inside diameter	Inside height	
		Dimensions in mm					Dimensions in inches					Packaging



9001
ISO certification

UPH-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Tapered Handle Plug

The UPH-SH Series plug has a convenient built-in handle for quick, easy insertion or removal. This is ideal for situations that demand rapid operation or when multiple plugs are used and frequently replaced. Tailored to mask both plain and threaded holes and tapered to fit wide ranging hole sizes this snug versatile plug works at high temperatures.



Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Colour coded for size identification**

Yellow (-**YL**)
RAL 1016

Red (-**RD**)
RAL 3018

Green (-**GN**)
RAL 6024

Pink (-**PK**)
RAL 4003

Purple (-**PL**)
RAL 4008

Clear (-**CL**)
RAL 9003

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



9001
ISO certification

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm				Packaging
		D	D1	H	H1	Quantity per bag
		Outside diameter	Outside diameter	Height	Overall height	
21191924	Clear	0.79	3.18	15.88	25.40	1000
21213684	Green	1.60	3.18	15.88	25.40	1000
21229574	Pink	1.60	4.78	15.88	28.70	1000
21395604	Black	3.18	6.35	19.05	31.75	1000
21538944	Red	4.78	8.74	15.88	28.70	1000
21562004	White	6.35	9.53	12.70	25.40	100
21576654	Yellow	6.35	9.53	19.05	31.75	100
21618894	Purple	10.31	15.09	25.40	44.45	100
21628714	Green	11.13	15.88	22.23	41.28	100
21685184	Pink	12.70	16.66	25.40	44.45	100
21695884	Red	15.88	19.84	25.40	44.45	100
21766754	Yellow	18.26	23.83	25.40	44.45	100
21772874	Clear	19.05	25.40	25.40	44.45	100

Part Number	Colour	D	D1	H	H1	Quantity per bag
		Outside diameter	Outside diameter	Height	Overall height	
		Dimensions in mm				Packaging

UPH-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in inches				Packaging
		D	D1	H	H1	Quantity per bag
		Outside diameter	Outside diameter	Height	Overall height	
21191924	Clear	0.031	0.125	0.625	1.000	1000
21213684	Green	0.063	0.125	0.625	1.000	1000
21229574	Pink	0.063	0.188	0.625	1.130	1000
21395604	Black	0.125	0.250	0.750	1.250	1000
21538944	Red	0.188	0.344	0.625	1.130	1000
21562004	White	0.250	0.375	0.500	1.000	100
21576654	Yellow	0.250	0.375	0.750	1.250	100
21618894	Purple	0.406	0.594	1.000	1.750	100
21628714	Green	0.438	0.625	0.875	1.625	100
21685184	Pink	0.500	0.656	1.000	1.750	100
21695884	Red	0.625	0.781	1.000	1.750	100
21766754	Yellow	0.719	0.938	1.000	1.750	100
21772874	Clear	0.750	1.000	1.000	1.750	100

Part Number	Colour	D	D1	H	H1	Quantity per bag
		Outside diameter	Outside diameter	Height	Overall height	
		Dimensions in inches				Packaging



9001
ISO certification

HUPH-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Hollow Handle Plug

The HUPH-SH Series hollow plug with handle makes for convenient insertion and removal to simplify and speed up handling, especially if multiple plugs are frequently used and replaced. Hollow design and great flexibility adapt accurately to small holes in precision components or larger threaded openings. The reusable plug works at high temperature.



Material: Ultrabake™ **(VMQ)**
Temperature Resistance: 315°**C** / 600°**F**

***Available in low temperature applications materials**


Yellow (-**YL**)
RAL 1016

Blue (-**BL**)
RAL 5002

Green (-**GN**)
RAL 6024

Green (-**GN**)
RAL 6032

Clear (-**CL**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm				Packaging
		D	D1	H	H1	
		Outside diameter	Outside diameter	Height	Overall height	Quantity per bag
21227454	Green	23.01	27.00	25.40	44.45	100
21331764	Yellow	23.75	29.21	25.40	44.45	100
21484734	Green	26.19	31.75	25.40	44.45	100
21559464	Blue	30.15	36.50	25.40	44.45	50
21663474	Clear	41.28	50.01	25.40	44.45	25
21913794	Blue	47.63	55.96	25.40	44.45	25

Part Number	Colour	D	D1	H	H1	Quantity per bag
		Outside diameter	Outside diameter	Height	Overall height	
		Dimensions in mm				Packaging

9001
ISO certification

HUPH-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in inches				Packaging
		D	D1	H	H1	
		Outside diameter	Outside diameter	Height	Overall height	Quantity per bag
21227454	Green	0.906	1.063	1.000	1.750	100
21331764	Yellow	0.935	1.115	1.000	1.750	100
21484734	Green	1.031	1.250	1.000	1.750	100
21559464	Blue	1.187	1.437	1.000	1.750	50
21663474	Clear	1.625	1.969	1.000	1.750	25
21913794	Blue	1.875	2.203	1.000	1.750	25

Part Number	Colour	D	D1	H	H1	Quantity per bag
		Outside diameter	Outside diameter	Height	Overall height	
		Dimensions in inches				Packaging



9001
ISO certification

TS Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Tapered Plug

The TS Series plug tapered ensures firmer fit, tight seal and effective masking of delicate surfaces, fitting snugly into plain or threaded holes to block coating materials entry. Highly versatile with excellent heat resistance and integrity at high temperatures, this design offers rigid and flexible options for pressure resistance or adaptability.

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***A version is available with a vent**

Red (-**RD**)
RAL 3024

Clear (-**CL**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Hardness (shore)	Colour	Dimensions in mm						Packaging	
			D	D1	H	D2	d	d1	Carton quantity	Mini pack quantity
			Outside diameter	Outside diameter	Outside height	Flange diameter	Inside diameter	Inside diameter		
15108161	70	Red	4.62	2.95	9.65	8.38	3.05	1.35	5000	1000
15109561	45	Natural	4.62	2.95	9.65	8.38	3.05	1.35	5000	1000
15154841	70	Red	6.10	4.39	9.65	10.16	4.50	2.82	5000	1000
15160841	45	Natural	6.10	4.39	9.65	10.16	4.50	2.82	5000	1000
15181081	70	Red	7.49	6.10	9.65	11.68	6.10	4.42	5000	1000
15190901	45	Natural	7.49	6.10	9.65	11.68	6.10	4.42	5000	1000
15205711	70	Red	9.27	7.59	9.65	13.21	7.67	5.97	5000	1000
15215661	45	Natural	9.27	7.59	9.65	13.21	7.67	5.97	5000	1000
15220381	70	Red	9.32	8.26	4.83	12.70	7.75	6.68	5000	
15221251	70	Red	10.62	9.17	9.65	14.73	9.27	7.57	5000	1000
15235351	45	Natural	10.62	9.17	9.65	14.73	9.27	7.57	5000	1000
15246631	70	Red	12.32	10.64	9.65	16.51	10.72	9.04	5000	1000
15263261	45	Natural	12.32	10.64	9.65	16.51	10.72	9.04	5000	1000
15275211	70	Red	13.61	11.96	11.18	18.03	12.32	10.39	5000	1000
15280821	45	Natural	13.61	11.96	11.18	18.03	12.32	10.39	5000	1000
15320831	70	Red	15.44	13.51	11.18	19.56	13.84	11.89	5000	1000
15333361	45	Natural	15.44	13.51	11.18	19.56	13.84	11.89	5000	1000
15359521	70	Red	16.94	14.73	12.70	21.08	15.37	13.16	5000	1000
15371281	45	Natural	16.94	14.73	12.70	21.08	15.37	13.16	5000	1000
15372341	70	Red	18.47	16.26	12.70	22.86	16.87	14.68	5000	1000
15393211	45	Natural	18.47	16.26	12.70	22.86	16.87	14.68	5000	1000
15393991	70	Red	20.02	17.53	14.22	24.38	18.44	15.95	5000	1000

9001
ISO certification

TS Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Hardness (shore)	Colour	Dimensions in inches						Packaging	
			D	D1	H	D2	d	d1	Carton quantity	Mini pack quantity
			Outside diameter	Outside diameter	Outside height	Flange diameter	Inside diameter	Inside diameter		
15108161	70	Red	0.182	0.116	0.380	0.330	0.120	0.053	5000	1000
15109561	45	Natural	0.182	0.116	0.380	0.330	0.120	0.053	5000	1000
15154841	70	Red	0.240	0.173	0.380	0.400	0.177	0.111	5000	1000
15160841	45	Natural	0.240	0.173	0.380	0.400	0.177	0.111	5000	1000
15181081	70	Red	0.295	0.240	0.380	0.460	0.240	0.174	5000	1000
15190901	45	Natural	0.295	0.240	0.380	0.460	0.240	0.174	5000	1000
15205711	70	Red	0.365	0.299	0.380	0.520	0.302	0.235	5000	1000
15215661	45	Natural	0.365	0.299	0.380	0.520	0.302	0.235	5000	1000
15220381	70	Red	0.367	0.325	0.190	0.500	0.305	0.263	5000	
15221251	70	Red	0.418	0.361	0.380	0.580	0.365	0.298	5000	1000
15235351	45	Natural	0.418	0.361	0.380	0.580	0.365	0.298	5000	1000
15246631	70	Red	0.485	0.419	0.380	0.650	0.422	0.356	5000	1000
15263261	45	Natural	0.485	0.419	0.380	0.650	0.422	0.356	5000	1000
15275211	70	Red	0.536	0.471	0.440	0.710	0.485	0.409	5000	1000
15280821	45	Natural	0.536	0.471	0.440	0.710	0.485	0.409	5000	1000
15320831	70	Red	0.608	0.532	0.440	0.770	0.545	0.468	5000	1000
15333361	45	Natural	0.608	0.532	0.440	0.770	0.545	0.468	5000	1000
15359521	70	Red	0.667	0.580	0.500	0.830	0.605	0.518	5000	1000
15371281	45	Natural	0.667	0.580	0.500	0.830	0.605	0.518	5000	1000
15372341	70	Red	0.727	0.640	0.500	0.900	0.664	0.578	5000	1000
15393211	45	Natural	0.727	0.640	0.500	0.900	0.664	0.578	5000	1000
15393991	70	Red	0.788	0.690	0.560	0.960	0.726	0.628	5000	1000



9001
ISO certification

TS Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Hardness (shore)	Colour	Dimensions in mm						Packaging	
			D	D1	H	D2	d	d1	Carton quantity	Mini pack quantity
			Outside diameter	Outside diameter	Outside height	Flange diameter	Inside diameter	Inside diameter		
15413371	45	Natural	20.02	17.53	14.22	24.38	18.44	15.95	5000	1000
15419401	70	Red	21.54	19.05	14.22	25.91	19.94	17.45	5000	1000
15425511	45	Natural	21.54	19.05	14.22	25.91	19.94	17.45	5000	1000
15468221	70	Red	23.14	20.37	16.00	27.43	21.56	18.80	5000	1000
15520511	45	Natural	23.14	20.37	16.00	27.43	21.56	18.80	5000	1000
15545481	70	Red	24.77	22.00	16.00	29.21	23.16	20.40	5000	1000
15554521	45	Natural	24.77	22.00	16.00	29.21	23.16	20.40	5000	1000
15575331	70	Red	27.69	24.49	19.05	32.26	26.09	22.89	2500	500
15614911	45	Natural	27.69	24.49	19.05	32.26	26.09	22.89	2500	500
15644531	70	Red	30.86	27.79	19.05	36.32	29.26	26.19	2500	500
15646601	70	Red	34.42	31.09	19.05	38.61	32.82	29.49	2500	500
15660531	45	Natural	34.42	31.09	19.05	38.61	32.82	29.49	2500	500
15667591	70	Red	37.21	33.32	22.35	41.91	35.61	31.72	1000	200
15696131	45	Natural	37.21	33.32	22.35	41.91	35.61	31.72	1000	200
15715751	70	Red	40.64	36.75	22.35	44.96	39.04	35.15	1000	200
15717211	45	Natural	40.64	36.75	22.35	44.96	39.04	35.15	1000	200
15718371	70	Red	42.72	39.62	19.05	48.26	41.15	38.05	1000	200
15731691	45	Natural	42.72	39.62	19.05	48.26	41.15	38.05	1000	200
15734481	70	Red	47.75	44.45	25.40	51.31	46.18	42.88	1000	200
15806041	45	Natural	47.75	44.45	25.40	51.31	46.18	42.88	1000	200
15809921	70	Red	49.53	45.21	25.40	54.61	47.96	43.64	1000	200
15809961	45	Natural	49.53	45.21	25.40	54.61	47.96	43.64	1000	200
15811631	70	Red	52.73	48.26	25.40	57.66	51.13	46.66	1000	200
15828621	45	Natural	52.73	48.26	25.40	57.66	51.13	46.66	1000	200
15872951	70	Red	56.13	51.69	25.40	59.94	54.69	50.19	1000	200
15887101	70	Red	61.72	57.28	25.40	65.53	60.27	55.78	1000	200
15913281	70	Red	68.58	64.14	25.40	72.39	67.13	62.64	1000	200
15933031	70	Red	74.68	70.23	25.40	78.49	73.23	68.73	1000	200
Part Number	Hardness (shore)	Colour	D	D1	H	D2	d	d1	Carton quantity	Mini pack quantity
			Outside diameter	Outside diameter	Outside height	Flange diameter	Inside diameter	Inside diameter		
			Dimensions in mm						Packaging	

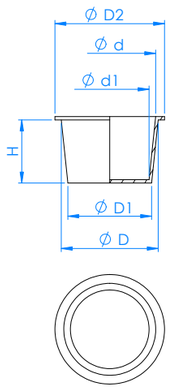

9001
ISO certification

TS Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Hardness (shore)	Colour	Dimensions in inches						Packaging	
			D	D1	H	D2	d	d1	Carton quantity	Mini pack quantity
			Outside diameter	Outside diameter	Outside height	Flange diameter	Inside diameter	Inside diameter		
15413371	45	Natural	0.788	0.690	0.560	0.960	0.726	0.628	5000	1000
15419401	70	Red	0.848	0.750	0.560	1.020	0.785	0.687	5000	1000
15425511	45	Natural	0.848	0.750	0.560	1.020	0.785	0.687	5000	1000
15468221	70	Red	0.911	0.802	0.630	1.080	0.849	0.740	5000	1000
15520511	45	Natural	0.911	0.802	0.630	1.080	0.849	0.740	5000	1000
15545481	70	Red	0.975	0.866	0.630	1.150	0.912	0.803	5000	1000
15554521	45	Natural	0.975	0.866	0.630	1.150	0.912	0.803	5000	1000
15575331	70	Red	1.090	0.964	0.750	1.270	1.027	0.901	2500	500
15614911	45	Natural	1.090	0.964	0.750	1.270	1.027	0.901	2500	500
15644531	70	Red	1.215	1.094	0.750	1.430	1.152	1.031	2500	500
15646601	70	Red	1.355	1.224	0.750	1.520	1.292	1.161	2500	500
15660531	45	Natural	1.355	1.224	0.750	1.520	1.292	1.161	2500	500
15667591	70	Red	1.465	1.312	0.880	1.650	1.402	1.249	1000	200
15696131	45	Natural	1.465	1.312	0.880	1.650	1.402	1.249	1000	200
15715751	70	Red	1.600	1.447	0.880	1.770	1.537	1.384	1000	200
15717211	45	Natural	1.600	1.447	0.880	1.770	1.537	1.384	1000	200
15718371	70	Red	1.682	1.560	0.750	1.900	1.620	1.498	1000	200
15731691	45	Natural	1.682	1.560	0.750	1.900	1.620	1.498	1000	200
15734481	70	Red	1.880	1.750	0.750	2.020	1.818	1.688	1000	200
15806041	45	Natural	1.880	1.750	0.750	2.020	1.818	1.688	1000	200
15809921	70	Red	1.950	1.780	1.000	2.150	1.888	1.718	1000	200
15809961	45	Natural	1.950	1.780	1.000	2.150	1.888	1.718	1000	200
15811631	70	Red	2.076	1.900	1.000	2.270	2.013	1.837	1000	200
15828621	45	Natural	2.076	1.900	1.000	2.270	2.013	1.837	1000	200
15872951	70	Red	2.210	2.035	1.000	2.360	2.153	1.976	1000	200
15887101	70	Red	2.430	2.255	1.000	2.580	2.373	2.196	1000	200
15913281	70	Red	2.700	2.525	1.000	2.850	2.643	2.466	1000	200
15933031	70	Red	2.940	2.765	1.000	3.090	2.883	2.706	1000	200
Part Number	Hardness (shore)	Colour	D	D1	H	D2	d	d1	Carton quantity	Mini pack quantity
			Outside diameter	Outside diameter	Outside height	Flange diameter	Inside diameter	Inside diameter		
			Dimensions in inches						Packaging	

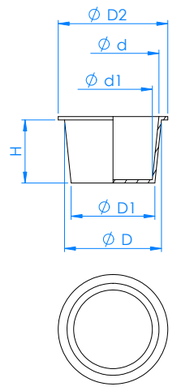

9001
ISO certification

TSV Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Vented Plug

The TSV Series plug maintains integrity at high temperatures, staying firmly in place to guard surface quality. An integrated vent mechanism relieves internal pressure build-up in protected systems, avoiding coating defects. Secure yet adaptive sealing shields from contaminants and is suited to pressure regulation or sensitive component protection.

Material: Ultrabake™ **(VMQ)**
Temperature Resistance: 315°**C** / 600°**F**

***A version is available with a vent**

Clear (-**CL**)
RAL 9003

Red (-**RD**)
RAL 3024

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

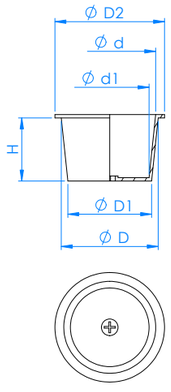

*For more information visit our website: **www.caplugs.eu**

Part Number	Hardness (shore)	Colour	Dimensions in mm						Packaging
			D	D1	H	D2	d	d1	
			Outside diameter	Outside diameter	Outside height	Flange diameter	Inside diameter	Inside diameter	Carton quantity
15115321	70	Red	4.62	2.95	9.65	8.38	3.05	1.35	5000
15130451	45	Natural	4.62	2.95	9.65	8.38	3.05	1.35	5000
15134621	70	Red	6.10	4.39	9.65	10.16	4.50	2.82	5000
15199281	45	Natural	6.10	4.39	9.65	10.16	4.50	2.82	5000
15214501	70	Red	7.49	6.10	9.65	11.68	6.10	4.42	5000
15218481	45	Natural	7.49	6.10	9.65	11.68	6.10	4.42	5000
15219131	70	Red	9.27	7.59	9.65	13.21	7.67	5.97	5000
15224511	45	Natural	9.27	7.59	9.65	13.21	7.67	5.97	5000
15255331	70	Red	10.62	9.17	9.65	14.73	9.27	7.57	5000
15259051	45	Natural	10.62	9.17	9.65	14.73	9.27	7.57	5000
15276751	70	Red	12.32	10.64	9.65	16.51	10.72	9.04	5000
15300811	45	Natural	12.32	10.64	9.65	16.51	10.72	9.04	5000
15305911	70	Red	13.61	11.96	11.18	18.03	12.32	10.39	5000
15348751	45	Natural	13.61	11.96	11.18	18.03	12.32	10.39	5000
15357411	70	Red	15.44	13.51	11.18	19.56	13.84	11.89	5000
15364461	45	Natural	15.44	13.51	11.18	19.56	13.84	11.89	5000
15366271	70	Red	16.94	14.73	12.70	21.08	15.37	13.16	5000
15380281	45	Natural	16.94	14.73	12.70	21.08	15.37	13.16	5000
15393081	70	Red	18.47	16.26	12.70	22.86	16.87	14.68	5000
15405281	45	Natural	18.47	16.26	12.70	22.86	16.87	14.68	5000
15414361	70	Red	20.02	17.53	14.22	23.38	18.44	15.95	5000
15418561	45	Natural	20.02	17.53	14.22	23.38	18.44	15.95	5000

9001
ISO certification

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

TSV Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Hardness (shore)	Colour	Dimensions in inches						Packaging
			D	D1	H	D2	d	d1	
			Outside diameter	Outside diameter	Outside height	Flange diameter	Inside diameter	Inside diameter	Carton quantity
15115321	70	Red	0.182	0.116	0.380	0.330	0.120	0.053	5000
15130451	45	Natural	0.182	0.116	0.380	0.330	0.120	0.053	5000
15134621	70	Red	0.240	0.173	0.380	0.400	0.177	0.111	5000
15199281	45	Natural	0.240	0.173	0.380	0.400	0.177	0.111	5000
15214501	70	Red	0.295	0.240	0.380	0.460	0.240	0.174	5000
15218481	45	Natural	0.295	0.240	0.380	0.460	0.240	0.174	5000
15219131	70	Red	0.365	0.299	0.380	0.520	0.302	0.235	5000
15224511	45	Natural	0.365	0.299	0.380	0.520	0.302	0.235	5000
15255331	70	Red	0.418	0.361	0.380	0.580	0.365	0.298	5000
15259051	45	Natural	0.418	0.361	0.380	0.580	0.365	0.298	5000
15276751	70	Red	0.485	0.419	0.380	0.650	0.422	0.356	5000
15300811	45	Natural	0.485	0.419	0.380	0.650	0.422	0.356	5000
15305911	70	Red	0.536	0.471	0.440	0.710	0.485	0.409	5000
15348751	45	Natural	0.536	0.471	0.440	0.710	0.485	0.409	5000
15357411	70	Red	0.608	0.532	0.440	0.770	0.545	0.468	5000
15364461	45	Natural	0.608	0.532	0.440	0.770	0.545	0.468	5000
15366271	70	Red	0.667	0.580	0.500	0.830	0.605	0.518	5000
15380281	45	Natural	0.667	0.580	0.500	0.830	0.605	0.518	5000
15393081	70	Red	0.727	0.640	0.500	0.900	0.664	0.578	5000
15405281	45	Natural	0.727	0.640	0.500	0.900	0.664	0.578	5000
15414361	70	Red	0.788	0.690	0.560	0.960	0.726	0.628	5000
15418561	45	Natural	0.788	0.690	0.560	0.960	0.726	0.628	5000

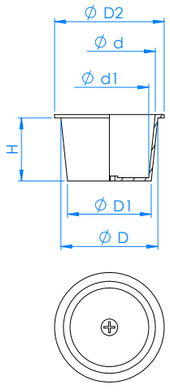

9001
ISO certification

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

TSV Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Hardness (shore)	Colour	Dimensions in mm						Packaging
			D	D1	H	D2	d	d1	
			Outside diameter	Outside diameter	Outside height	Flange diameter	Inside diameter	Inside diameter	Carton quantity
15428061	70	Red	21.54	19.05	14.22	25.91	19.94	17.45	5000
15428271	45	Natural	21.54	19.05	14.22	25.91	19.94	17.45	5000
15437341	70	Red	23.14	20.37	16.00	27.43	21.56	18.80	5000
15448681	45	Natural	23.14	20.37	16.00	27.43	21.56	18.80	5000
15450901	70	Red	24.77	22.00	16.00	29.21	23.16	20.40	5000
15454251	45	Natural	24.77	22.00	16.00	29.21	23.16	20.40	5000
15487241	70	Red	27.69	24.49	19.05	32.26	26.09	22.89	2500
15492211	45	Natural	27.69	24.49	19.05	32.26	26.09	22.89	2500
15493061	70	Red	30.86	27.79	19.05	36.32	29.26	26.19	2500
15549101	45	Natural	30.86	27.79	19.05	36.32	29.26	26.19	2500
15566671	70	Red	34.42	31.09	19.05	38.61	32.82	29.49	2500
15581541	45	Natural	34.42	31.09	19.05	38.61	32.82	29.49	2500
15592441	70	Red	37.21	33.32	22.35	41.91	35.61	31.72	1000
15597881	45	Natural	37.21	33.32	22.35	41.91	35.61	31.72	1000
15610291	70	Red	40.64	36.75	22.35	44.96	39.04	35.15	1000
15611241	45	Natural	40.64	36.75	22.35	44.96	39.04	35.15	1000
15646191	70	Red	42.72	39.62	19.05	48.26	41.15	38.05	1000
15648021	45	Natural	42.72	39.62	19.05	48.26	41.15	38.05	1000
15672011	70	Red	47.75	44.45	19.05	51.31	46.18	42.88	1000
15685771	45	Natural	47.75	44.45	19.05	51.31	46.18	42.88	1000
15719441	70	Red	49.53	45.21	25.40	54.61	47.96	43.64	1000
15723421	45	Natural	49.53	45.21	25.40	54.61	47.96	43.64	1000
15728581	70	Red	52.73	48.26	25.40	57.66	51.13	46.66	1000
15731731	45	Natural	52.73	48.26	25.40	57.66	51.13	46.66	1000
15734801	70	Red	56.13	51.69	25.40	59.94	54.69	50.19	200
15752601	45	Natural	56.13	51.69	25.40	59.94	54.69	50.19	200
15752631	70	Red	61.72	57.28	25.40	65.53	60.27	55.78	1000
15807761	45	Natural	61.72	57.28	25.40	65.53	60.27	55.78	1000
15818201	70	Red	68.58	64.14	25.40	72.39	67.13	62.64	1000
15823761	45	Natural	68.58	64.14	25.40	72.39	67.13	62.64	1000
15834081	70	Red	74.68	70.23	25.40	78.49	73.23	68.73	1000
15835661	45	Natural	74.68	70.23	25.40	78.49	73.23	68.73	1000

Part Number	Hardness (shore)	Colour	D	D1	H	D2	d	d1	Carton quantity
			Outside diameter	Outside diameter	Outside height	Flange diameter	Inside diameter	Inside diameter	
			Dimensions in mm						Packaging

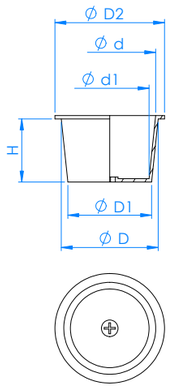

9001
ISO certification

TSV Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Hardness (shore)	Colour	Dimensions in inches						Packaging
			D	D1	H	D2	d	d1	
			Outside diameter	Outside diameter	Outside height	Flange diameter	Inside diameter	Inside diameter	Carton quantity
15428061	70	Red	0.848	0.750	0.560	1.020	0.785	0.687	5000
15428271	45	Natural	0.848	0.750	0.560	1.020	0.785	0.687	5000
15437341	70	Red	0.911	0.802	0.630	1.080	0.849	0.740	5000
15448681	45	Natural	0.911	0.802	0.630	1.080	0.849	0.740	5000
15450901	70	Red	0.975	0.866	0.630	1.150	0.912	0.803	5000
15454251	45	Natural	0.975	0.866	0.630	1.150	0.912	0.803	5000
15487241	70	Red	1.090	0.964	0.750	1.270	1.027	0.901	2500
15492211	45	Natural	1.090	0.964	0.750	1.270	1.027	0.901	2500
15493061	70	Red	1.215	1.094	0.750	1.430	1.152	1.031	2500
15549101	45	Natural	1.215	1.094	0.750	1.430	1.152	1.031	2500
15566671	70	Red	1.355	1.224	0.750	1.520	1.292	1.161	2500
15581541	45	Natural	1.355	1.224	0.750	1.520	1.292	1.161	2500
15592441	70	Red	1.465	1.312	0.880	1.650	1.402	1.249	1000
15597881	45	Natural	1.465	1.312	0.880	1.650	1.402	1.249	1000
15610291	70	Red	1.600	1.447	0.880	1.770	1.537	1.384	1000
15611241	45	Natural	1.600	1.447	0.880	1.770	1.537	1.384	1000
15646191	70	Red	1.682	1.560	0.750	1.900	1.620	1.498	1000
15648021	45	Natural	1.682	1.560	0.750	1.900	1.620	1.498	1000
15672011	70	Red	1.880	1.750	0.750	2.020	1.818	1.688	1000
15685771	45	Natural	1.880	1.750	0.750	2.020	1.818	1.688	1000
15719441	70	Red	1.950	1.780	1.000	2.150	1.888	1.718	1000
15723421	45	Natural	1.950	1.780	1.000	2.150	1.888	1.718	1000
15728581	70	Red	2.076	1.900	1.000	2.270	2.013	1.837	1000
15731731	45	Natural	2.076	1.900	1.000	2.270	2.013	1.837	1000
15734801	70	Red	2.210	2.035	1.000	2.360	2.153	1.976	200
15752601	45	Natural	2.210	2.035	1.000	2.360	2.153	1.976	200
15752631	70	Red	2.430	2.255	1.000	2.580	2.373	2.196	1000
15807761	45	Natural	2.430	2.255	1.000	2.580	2.373	2.196	1000
15818201	70	Red	2.700	2.525	1.000	2.850	2.643	2.466	1000
15823761	45	Natural	2.700	2.525	1.000	2.850	2.643	2.466	1000
15834081	70	Red	2.940	2.765	1.000	3.090	2.883	2.706	1000
15835661	45	Natural	2.940	2.765	1.000	3.090	2.883	2.706	1000

Part Number	Hardness (shore)	Colour	D	D1	H	D2	d	d1	Carton quantity
			Outside diameter	Outside diameter	Outside height	Flange diameter	Inside diameter	Inside diameter	
			Dimensions in inches						Packaging

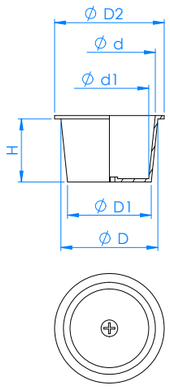

9001
ISO certification

GN-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Heat Resistant Plug

The GN-SH Series masking plug's material and construction offer versatile plain and threaded hole plugging, retaining integrity to ensure excellent masking during moderate heat processes. The adaptable tapered design stops unwanted paint or plating material entering protected holes. Multiple reuse before replacement increases cost-effectiveness.



Material: Neoprene (CR)
Temperature Resistance: 177°**C** / 350°**F**

***Available in high temperature applications materials**

Green (-**GN**)
RAL 6032

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





9001
ISO certification

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	D	D1	H	D	D1	H	Quantity per bag
	Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	
21100074	0.79	3.18	15.88	0.031	0.125	0.625	1000
21114434	1.59	3.18	15.88	0.063	0.125	0.625	1000
21131634	1.59	4.76	15.88	0.063	0.188	0.625	1000
21168634	3.18	6.35	19.05	0.125	0.250	0.750	1000
21176504	4.76	8.73	15.88	0.188	0.344	0.625	1000
21185994	6.35	9.53	19.05	0.250	0.375	0.750	1000
21193404	6.35	9.53	12.70	0.250	0.375	0.500	100
21193914	8.73	11.18	17.46	0.344	0.440	0.688	100
21199234	8.73	12.70	20.64	0.344	0.500	0.813	100
21203834	8.13	14.29	25.40	0.320	0.563	1.000	100
21230624	10.32	15.08	25.40	0.406	0.594	1.000	100
21236454	11.13	15.88	22.23	0.438	0.625	0.875	100
21267924	12.70	16.67	25.40	0.500	0.656	1.000	100
21274534	14.29	19.05	25.40	0.563	0.750	1.000	100
21283934	15.88	19.84	25.40	0.625	0.781	1.000	100
21317064	18.26	23.81	25.40	0.719	0.938	1.000	100
21338494	19.05	25.40	25.40	0.750	1.000	1.000	100
21363084	23.02	27.00	25.40	0.906	1.063	1.000	100
21385124	26.19	31.75	25.40	1.031	1.250	1.000	100
21392904	30.18	36.53	25.40	1.188	1.438	1.000	100
21424934	34.21	42.16	25.40	1.347	1.660	1.000	50
21434904	37.31	44.45	25.40	1.469	1.750	1.000	50

GN-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	D	D1	H	D	D1	H	Quantity per bag
	Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	
21436244	41.28	50.01	25.40	1.625	1.969	1.000	50
21442084	47.63	55.96	25.40	1.875	2.203	1.000	25
21445834	50.80	62.71	25.40	2.000	2.469	1.000	25
21472484	53.98	64.14	25.40	2.125	2.525	1.000	25
21506104	57.94	68.28	25.40	2.281	2.688	1.000	25
21560444	61.93	75.01	37.31	2.438	2.953	1.469	1
21597044	76.20	88.90	38.10	3.000	3.500	1.500	1
21599684	82.55	102.62	38.10	3.250	4.040	1.500	1
21641464	88.90	128.78	50.80	3.500	5.070	2.000	1

Part Number	D	D1	H	D	D1	H	Quantity per bag
	Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	
	Dimensions in mm			Dimensions in inches			Packaging





9001
ISO certification

BN-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Push-In Plug

The BN-SH Series plug benefits from high stability and flexibility, providing clean and professional finish masking solutions right to the plug edge for both plain and threaded holes. Built-in temperature resistance means suitability in moderate heat based industrial processes, ensuring plug integrity and effective masking are maintained throughout.

Material: Neoprene (CR)
Temperature Resistance: 177°**C** / 350°**F**

***Available in high temperature applications materials**

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





9001
ISO certification

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	D	D1	H	D	D1	H	Quantity per bag
	Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	
21111704	0.79	3.18	15.88	0.031	0.125	0.625	1000
21142854	1.59	3.18	15.88	0.063	0.125	0.625	1000
21143344	1.59	4.76	15.88	0.063	0.188	0.625	1000
21151394	3.18	6.35	19.05	0.125	0.250	0.750	1000
21173844	4.76	8.73	15.88	0.188	0.344	0.625	1000
21189884	6.35	9.53	19.05	0.250	0.375	0.750	1000
21200144	6.35	9.53	12.70	0.250	0.375	0.500	100
21240224	8.73	11.18	17.46	0.344	0.440	0.688	100
21240864	8.73	12.70	20.64	0.344	0.500	0.813	100
21259364	8.13	14.29	25.40	0.320	0.563	1,000	100
21264434	10.32	15.08	25.40	0.406	0.594	1,000	100
21267264	11,13	15.88	22,23	0.438	0.625	0,875	100
21290784	12.70	16.67	25.40	0.500	0.656	1,000	100
21295534	14.29	19.05	25.40	0.563	0.750	1,000	100
21319744	15.88	19.84	25.40	0.625	0.781	1,000	100
21340074	18.26	23.81	25.40	0.719	0.938	1,000	100
21369374	19.05	25.40	25.40	0.750	1,000	1,000	100
21371364	23.02	27.00	25.40	0.906	1,063	1,000	100
21381584	26.19	31.75	25.40	1,031	1,250	1,000	100
21410794	30.18	36.53	25.40	1,188	1,438	1,000	100
21455694	34.21	42.16	25.40	1,347	1,660	1,000	50
21478614	37.31	44.45	25.40	1,469	1,750	1,000	50

BN-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	D	D1	H	D	D1	H	Quantity per bag
	Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	
21485564	41.28	50.01	25.40	1.625	1.969	1.000	50
21486434	47.63	55.96	25.40	1.875	2.203	1.000	25
21505884	50.80	62.71	25.40	2.000	2.469	1.000	25
21529244	53.98	64.14	25.40	2.125	2.525	1.000	25
21540514	57.94	68.28	25.40	2.281	2.688	1.000	25
21568714	61.93	75.01	37.31	2.438	2.953	1.469	1
21616664	76.20	88.90	38.10	3.000	3.500	1.500	1
21649284	82.55	102.62	38.10	3.250	4.040	1.500	1
21674854	88.90	128.78	50.80	3.500	5.070	2.000	1

Part Number	D	D1	H	D	D1	H	Quantity per bag
	Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	
	Dimensions in mm			Dimensions in inches			Packaging





9001
ISO certification

TP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Tapered Plug

The TP-SH Series masking plug is suitable for plain and threaded holes, providing robust protection from moderate heat environments, ozone and weathering. The temperature resistance is crucial to ensuring plug integrity is maintained. This in turn delivers consistent and precise up-to-plug-edge masking right through industrial finishing processes.



Material: Ethylene Propylene Diene Monomer (EPDM)
Temperature Resistance: 177°**C** / 350°**F**

***Available in high temperature applications materials**

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	D	D1	H	D	D1	H	Quantity per bag
	Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	
21100364	0.79	3.18	15.88	0.031	0.125	0.625	1000
21119914	1.60	3.18	15.88	0.063	0.125	0.625	1000
21120504	1.60	4.78	16.00	0.063	0.188	0.630	1000
21137594	3.18	6.35	19.05	0.125	0.250	0.750	1000
21150594	4.78	8.74	15.88	0.188	0.344	0.625	1000
21151014	6.35	9.53	19.05	0.250	0.375	0.750	1000
21180484	6.35	9.65	12.70	0.250	0.380	0.500	100
21189334	8.13	14.30	25.40	0.320	0.563	1.000	100
21198434	8.64	12.70	20.65	0.340	0.500	0.813	100
21198894	8.74	11.18	17.48	0.344	0.440	0.688	100
21213014	10.26	15.09	25.40	0.404	0.594	1.000	100
21272674	11.13	15.88	22.23	0.438	0.625	0.875	100
21339794	12.70	16.66	25.40	0.500	0.656	1.000	100
21366174	14.30	19.05	25.40	0.563	0.750	1.000	100
21400454	15.88	19.84	25.40	0.625	0.781	1.000	100
21403804	18.42	23.83	25.40	0.725	0.938	1.000	100
21409394	19.05	25.27	25.40	0.750	0.995	1.000	100
21423934	23.01	27.00	25.40	0.906	1.063	1.000	100
21425644	26.19	31.75	25.40	1.031	1.250	1.000	100
21432074	30.18	36.53	25.40	1.188	1.438	1.000	100
21439564	34.21	42.16	25.40	1.347	1.660	1.000	50
21447794	37.31	44.45	25.40	1.469	1.750	1.000	50



9001
ISO certification

TP-SH Series

Non-Threaded Plugs

sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	D	D1	H	D	D1	H	Quantity per bag
	Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	
21451254	41.28	50.01	25.40	1.625	1.969	1.000	50
21491584	47.63	56.90	25.40	1.875	2.240	1.000	25
21537284	50.80	62.71	25.40	2.000	2.469	1.000	25
21537904	53.98	64.14	25.40	2.125	2.525	1.000	25
21559534	58.17	68.83	25.40	2.290	2.710	1.000	25
21567374	61.98	74.93	35.56	2.440	2.950	1.400	1
21574634	76.20	89.92	38.10	3.000	3.540	1.500	1
21596384	82.55	102.62	38.10	3.250	4.040	1.500	1
21600564	89.15	128.02	50.80	3.510	5.040	2.000	1

Part Number	D	D1	H	D	D1	H	Quantity per bag
	Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	
	Dimensions in mm			Dimensions in inches			Packaging





9001
ISO certification

SPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Pull Tab Plug

The SPP-SH Series pull plug provides a tight seal and flexible masking of threaded and non-threaded hole sizes, ensuring reduced component damage and a clean, professional finish, by eliminating defects and inconsistencies. Insertion and removal are fast and easy with a convenient to use pull-tab. This plug is ideal for frequent replacement usage.



Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Available in low temperature applications materials**

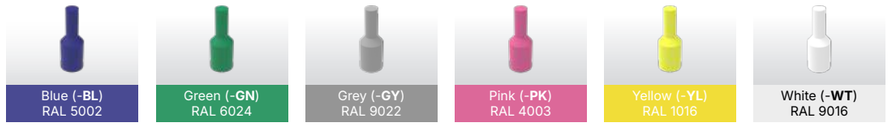

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits Metric Thread	Fits Imperial Thread	Colour	Dimensions in mm				Packaging
				D	H	D1	H1	
				Outside diameter	Body height	Handle diameter	Handle height	Quantity per bag
21102224			Clear	1,57	9,53	1,17	8,56	500
21108404			Clear	1,57	12,70	1,02	12,70	500
21131664			Pink	1,70	15,88	1,19	15,49	500
21134714	M2		Green	1,85	15,54	1,17	14,99	500
21171554			Clear	1,85	15,88	1,02	15,88	500
21174984			Yellow	2,31	15,88	1,32	15,88	500
21179674			Clear	2,31	15,88	1,32	15,88	500
21183414	M2.5	2-56 UNC, 2-64 UNF	Grey	2,36	17,78	1,27	17,78	500
21204804	M3	3-48 UNC, 3-56 UNF	Blue	2,64	13,34	1,57	15,88	500
21213484	M3	3-48 UNC, 3-56 UNF	Clear	2,64	13,34	1,57	15,88	500
21228604	M3	3-48 UNC, 3-56 UNF	Clear	2,64	15,88	1,27	15,88	500
21228814			Clear	2,67	25,40	1,27	25,40	500
21391174			Clear	2,77	25,40	1,57	25,40	500
21236484		4-40 UNC, 4-48 UNF, 5-40 UNC, 5-44 UNF	White	3,18	15,88	1,57	15,88	500
21244614		4-40 UNC, 4-48 UNF, 5-40 UNC, 5-44 UNF	Clear	3,18	15,88	1,57	15,88	500
21253824			Pink	3,30	16,51	2,36	17,78	500
21254574		6-32 UNC, 6-40 UNF	Clear	3,30	25,40	2,36	25,40	500
21256904	M4		Green	3,61	15,88	2,16	14,17	500
21258834	M4		Clear	3,61	15,88	2,16	14,17	500
21260314			Yellow	3,91	16,05	2,11	15,24	100
21268674		8-32 UNC, 8-36 UNF	Grey	3,96	15,88	2,11	15,88	500

SPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits Metric Thread	Fits Imperial Thread	Colour	Dimensions in inches				Packaging
				D	H	D1	H1	
				Outside diameter	Body height	Handle diameter	Handle height	Quantity per bag
21102224			Clear	0,062	0,375	0,046	0,337	500
21108404			Clear	0,062	0,500	0,040	0,500	500
21131664			Pink	0,067	0,625	0,047	0,610	500
21134714	M2		Green	0,073	0,612	0,046	0,590	500
21171554			Clear	0,073	0,625	0,040	0,625	500
21174984			Yellow	0,091	0,625	0,052	0,625	500
21179674			Clear	0,091	0,625	0,052	0,625	500
21183414	M2.5	2-56 UNC, 2-64 UNF	Grey	0,093	0,700	0,050	0,700	500
21204804	M3	3-48 UNC, 3-56 UNF	Blue	0,104	0,525	0,062	0,625	500
21213484	M3	3-48 UNC, 3-56 UNF	Clear	0,104	0,525	0,062	0,625	500
21228604	M3	3-48 UNC, 3-56 UNF	Clear	0,104	0,625	0,050	0,625	500
21228814			Clear	0,105	1,000	0,050	1,000	500
21391174			Clear	0,109	1,000	0,062	1,000	500
21236484		4-40 UNC, 4-48 UNF, 5-40 UNC, 5-44 UNF	White	0,125	0,625	0,062	0,625	500
21244614		4-40 UNC, 4-48 UNF, 5-40 UNC, 5-44 UNF	Clear	0,125	0,625	0,062	0,625	500
21253824			Pink	0,130	0,650	0,093	0,700	500
21254574		6-32 UNC, 6-40 UNF	Clear	0,130	1,000	0,093	1,000	500
21256904	M4		Green	0,142	0,625	0,085	0,558	500
21258834	M4		Clear	0,142	0,625	0,085	0,558	500
21260314			Yellow	0,154	0,632	0,083	0,600	100
21268674		8-32 UNC, 8-36 UNF	Grey	0,156	0,625	0,083	0,625	500

SPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits Metric Thread	Fits Imperial Thread	Colour	Dimensions in mm				Packaging
				D	H	D1	H1	
				Outside diameter	Body height	Handle diameter	Handle height	Quantity per bag
21275994		8-32 UNC, 8-36 UNF	Clear	3,96	15,88	2,11	15,88	500
21276984			Clear	4,01	31,75	2,54	31,75	500
21296384		10-24 UNC, 10-32 UNF	Blue	4,11	15,88	2,44	14,76	500
21324734		10-24 UNC, 10-32 UNF	Clear	4,45	31,75	3,18	31,75	500
21329554			Clear	4,75	15,75	2,79	15,75	500
21330484			Clear	4,78	12,70	1,60	12,70	500
21340594	M5	12-24 UNC, 12-28 UNF	White	4,95	15,88	2,79	15,24	500
21347984			Clear	5,00	31,75	3,18	31,75	500
21348384	M6		Clear	5,54	25,40	3,30	23,50	500
21349894		1/4-20 UNC, 1/4-28 UNF	Pink	5,72	25,40	3,18	24,89	500
21351374		1/4-20 UNC, 1/4-28 UNF	Clear	5,72	25,40	3,18	24,89	500
21358744			Green	6,53	25,40	3,30	24,77	500
21362854			Clear	6,53	25,40	3,30	24,77	500
21369434			Clear	6,73	31,75	3,18	31,75	500
21369874	M8	5/16-18 UNC, 5/16-20 UN	Yellow	6,99	23,80	3,18	22,86	500
21370804	M8	5/16-18 UNC, 5/16-20 UN	Clear	6,99	23,80	3,18	22,86	500
21373524	M8	5/16-18 UNC, 5/16-20 UN	White	6,99	50,80	3,71	50,80	500
21373674			Clear	7,14	31,75	3,73	31,75	500
21375004		5/16-24 UNF, 5/16-28 UN	Grey	8,03	25,40	3,86	21,84	500
21398384		5/16-24 UNF, 5/16-28 UN	Clear	8,03	25,40	3,86	21,84	500
21401104			Blue	8,46	19,23	6,38	26,67	500
21407684		3/8-16 UNC, 3/8-20 UN	White	8,51	25,40	3,89	25,40	500
21415144		3/8-24 UNF, 3/8-28 UN	Clear	8,89	22,38	4,90	20,57	500
21421034	M10		Pink	9,75	25,40	3,91	23,42	250
21428464	M10		Blue	9,75	50,80	5,18	50,80	250
21430434			Clear	9,86	38,10	3,99	38,10	250
21438164			Clear	10,16	25,40	3,99	25,40	250
21451434		7/16-14 UNC, 7/16-20 UNF, 7/16-16 UN	Green	10,36	25,63	4,85	25,40	250
21456224			Clear	11,18	25,40	3,99	25,40	250
21460694		7/16-32 UN	Yellow	11,28	25,40	6,48	25,15	250
21461574	M12	1/2-13 UNC, 1/2-16 UN	Grey	11,30	25,40	6,48	25,40	250
21466264		1/2-20 UNF, 1/2-32 UN	Blue	11,99	25,40	6,17	25,40	250
21466494	M14		White	12,60	25,40	6,35	23,37	250
21471644	M14		Clear	12,60	50,80	6,68	50,80	250
21476594			Clear	12,95	25,40	6,50	20,83	250
21481664			Pink	13,46	25,40	6,35	25,40	250
21494784	M15	5/8-11 UNC	Green	14,50	25,40	7,70	25,40	250



9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

SPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits Metric Thread	Fits Imperial Thread	Colour	Dimensions in inches				Packaging
				D	H	D1	H1	
				Outside diameter	Body height	Handle diameter	Handle height	Quantity per bag
21275994		8-32 UNC, 8-36 UNF	Clear	0,156	0,625	0,083	0,625	500
21276984			Clear	0,158	1,250	0,100	1,250	500
21296384		10-24 UNC, 10-32 UNF	Blue	0,162	0,625	0,096	0,581	500
21324734		10-24 UNC, 10-32 UNF	Clear	0,175	1,250	0,125	1,250	500
21329554			Clear	0,187	0,620	0,110	0,620	500
21330484			Clear	0,188	0,500	0,063	0,500	500
21340594	M5	12-24 UNC, 12-28 UNF	White	0,195	0,625	0,110	0,600	500
21347984			Clear	0,197	1,250	0,125	1,250	500
21348384	M6		Clear	0,218	1,000	0,130	0,925	500
21349894		1/4-20 UNC, 1/4-28 UNF	Pink	0,225	1,000	0,125	0,980	500
21351374		1/4-20 UNC, 1/4-28 UNF	Clear	0,225	1,000	0,125	0,980	500
21358744			Green	0,257	1,000	0,130	0,975	500
21362854			Clear	0,257	1,000	0,130	0,975	500
21369434			Clear	0,265	1,250	0,125	1,250	500
21369874	M8	5/16-18 UNC, 5/16-20 UN	Yellow	0,275	0,937	0,125	0,900	500
21370804	M8	5/16-18 UNC, 5/16-20 UN	Clear	0,275	0,937	0,125	0,900	500
21373524	M8	5/16-18 UNC, 5/16-20 UN	White	0,275	2,000	0,146	2,000	500
21373674			Clear	0,281	1,250	0,147	1,250	500
21375004		5/16-24 UNF, 5/16-28 UN	Grey	0,316	1,000	0,152	0,860	500
21398384		5/16-24 UNF, 5/16-28 UN	Clear	0,316	1,000	0,152	0,860	500
21401104			Blue	0,333	0,757	0,251	1,050	500
21407684		3/8-16 UNC, 3/8-20 UN	White	0,335	1,000	0,153	1,000	500
21415144		3/8-24 UNF, 3/8-28 UN	Clear	0,350	0,881	0,193	0,810	500
21421034	M10		Pink	0,384	1,000	0,154	0,922	250
21428464	M10		Blue	0,384	2,000	0,204	2,000	250
21430434			Clear	0,388	1,500	0,157	1,500	250
21438164			Clear	0,400	1,000	0,157	1,000	250
21451434		7/16-14 UNC, 7/16-20 UNF, 7/16-16 UN	Green	0,408	1,009	0,191	1,000	250
21456224			Clear	0,440	1,000	0,157	1,000	250
21460694		7/16-32 UN	Yellow	0,444	1,000	0,255	0,990	250
21461574	M12	1/2-13 UNC, 1/2-16 UN	Grey	0,445	1,000	0,255	1,000	250
21466264		1/2-20 UNF, 1/2-32 UN	Blue	0,472	1,000	0,243	1,000	250
21466494	M14		White	0,496	1,000	0,250	0,920	250
21471644	M14		Clear	0,496	2,000	0,263	2,000	250
21476594			Clear	0,510	1,000	0,256	0,820	250
21481664			Pink	0,530	1,000	0,250	1,000	250
21494784	M15	5/8-11 UNC	Green	0,571	1,000	0,303	1,000	250



9001
ISO certification

caplugs

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

SPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Colour	Dimensions in mm				Packaging
				D	H	D1	H1	
				Outside diameter	Body height	Handle diameter	Handle height	Quantity per bag
21499104	M16		Yellow	15.54	25.40	6.35	25.40	250
21506114	M16		Clear	15.54	50.80	8.26	50.80	250
21512734	M17		Grey	16.26	25.40	9.53	25.40	100
21518164			Clear	17.78	31.75	9.53	31.75	250
21535354	M18		Blue	17.96	31.75	9.53	33.68	100
21555934	M18		Clear	17.96	50.80	9.53	50.80	100
21564204			White	18.49	28.58	9.53	27.94	100
21564454	M20		Clear	19.56	25.40	9.53	23.55	100
21564544	M20		Clear	19.56	38.10	6.35	38.10	100
21568474	M20		Yellow	19.56	50.80	10.36	53.34	100
21576604	M24		Pink	20.50	31.75	10.87	31.75	100
21578644			Green	22.56	25.40	9.45	25.40	100
21590974			Clear	22.76	25.40	9.53	25.40	100
21604244	M27		Yellow	25.91	25.40	9.53	24.64	100
21616304			Grey	35.05	38.10	18.59	38.10	50

Part Number	Fits metric thread	Fits imperial thread	Colour	D	H	D1	H1	Quantity per bag
				Outside diameter	Body height	Handle diameter	Handle height	
				Dimensions in mm				Packaging



9001
ISO certification

SPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Colour	Dimensions in inches				Packaging
				D	H	D1	H1	
				Outside diameter	Body height	Handle diameter	Handle height	Quantity per bag
21499104	M16		Yellow	0.612	1.000	0.250	1.000	250
21506114			Clear	0.612	2.000	0.325	2.000	250
21512734	M17		Grey	0.640	1.000	0.375	1.000	100
21518164			Clear	0.700	1.250	0.375	1.250	250
21535354	M18		Blue	0.707	1.250	0.375	1.326	100
21555934			Clear	0.707	2.000	0.375	2.000	100
21564204			White	0.728	1.125	0.375	1.100	100
21564454	M20		Clear	0.770	1.000	0.375	0.927	100
21564544	M20		Clear	0.770	1.500	0.250	1.500	100
21568474	M20		Yellow	0.770	2.000	0.408	2.100	100
21576604	M24		Pink	0.807	1.250	0.428	1.250	100
21578644			Green	0.888	1.000	0.372	1.000	100
21590974			Clear	0.896	1.000	0.375	1.000	100
21604244	M27		Yellow	1.020	1.000	0.375	0.970	100
21616304			Grey	1.380	1.500	0.732	1.500	50

Part Number	Fits metric thread	Fits imperial thread	Colour	D	H	D1	H1	Quantity per bag
				Outside diameter	Body height	Handle diameter	Handle height	
				Dimensions in inches				Packaging



9001
ISO certification

PP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Pull Plug

The PP-SH Series pull plug securely masks both threaded and non-threaded through-hole sizes and includes a built-in pull tab to make insertion and removal fast and very easy. The construction material offers excellent adaptability and tight sealing for a clean and professional finish, while temperature resistance suits moderate heat environments.

Material: Ethylene Propylene Diene Monomer (EPDM)
Temperature Resistance: 177°**C** / 350°**F**

***Available in high temperature applications materials**

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm				Packaging
			D	H	D1	H1	
			Outside diameter	Body height	Handle diameter	Handle height	Quantity per bag
21101024			1.57	9.53	1.17	8.56	500
21111214			1.70	15.88	1.19	15.49	500
21116404	M2		1.85	15.54	1.17	14.99	500
21119694			2.31	15.88	1.32	15.88	500
21156084	M2.5	2-56 UNC, 2-64 UNF	2.36	17.78	1.27	17.78	500
21157124	M3	3-48 UNC, 3-56 UNF	2.64	13.34	1.57	15.88	500
21161574			3.18	15.88	1.57	15.88	500
21194534		6-32 UNC, 6-40 UNF	3.30	25.40	2.36	25.40	500
21222704			3.30	16.51	2.36	17.78	500
21223794	M4		3.61	15.88	2.16	14.17	500
21231344			3.91	16.05	2.11	15.24	500
21264884		8-32 UNC, 8-36 UNF	3.96	15.88	2.11	15.88	500
21272534		10-24 UNC, 10-32 UNF	4.11	15.88	2.44	14.76	500
21284874	M5	12-24 UNC, 12-28 UNF	4.95	15.88	2.79	15.24	500
21299664	M6		5.54	25.40	3.30	23.50	500
21303994		1/4-20 UNC, 1/4-28 UNF	5.72	25.40	3.18	24.89	500
21304364			6.53	25.40	3.30	25.40	500
21312014	M8	5/16-18 UNC, 5/16-20 UN	6.99	23.80	3.18	22.86	500
21315484	M8	5/16-18 UNC, 5/16-20 UN	6.99	50.80	3.71	50.80	500
21321714		5/16-24 UNF, 5/16-28 UN	8.03	25.40	3.86	21.84	500
21371874			8.46	19.23	6.38	26.67	500
21385914		3/8-16 UNC, 3/8-20 UN	8.51	25.40	3.89	25.40	500

9001
ISO certification

PP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches				Packaging
			D	H	D1	H1	
			Outside diameter	Body height	Handle diameter	Handle height	Quantity per bag
21101024			0.062	0.375	0.046	0.337	500
21111214			0.067	0.625	0.047	0.610	500
21116404	M2		0.073	0.612	0.046	0.590	500
21119694			0.091	0.625	0.052	0.625	500
21156084	M2.5	2-56 UNC, 2-64 UNF	0.093	0.700	0.050	0.700	500
21157124	M3	3-48 UNC, 3-56 UNF	0.104	0.525	0.062	0.625	500
21161574			0.125	0.625	0.062	0.625	500
21194534		6-32 UNC, 6-40 UNF	0.130	1.000	0.093	1.000	500
21222704			0.130	0.650	0.093	0.700	500
21223794	M4		0.142	0.625	0.085	0.558	500
21231344			0.154	0.632	0.083	0.600	500
21264884		8-32 UNC, 8-36 UNF	0.156	0.625	0.083	0.625	500
21272534		10-24 UNC, 10-32 UNF	0.162	0.625	0.096	0.581	500
21284874	M5	12-24 UNC, 12-28 UNF	0.195	0.625	0.110	0.600	500
21299664	M6		0.218	1.000	0.130	0.925	500
21303994		1/4-20 UNC, 1/4-28 UNF	0.225	1.000	0.125	0.980	500
21304364			0.257	1.000	0.130	1.000	500
21312014	M8	5/16-18 UNC, 5/16-20 UN	0.275	0.937	0.125	0.900	500
21315484	M8	5/16-18 UNC, 5/16-20 UN	0.275	2.000	0.146	2.000	500
21321714		5/16-24 UNF, 5/16-28 UN	0.316	1.000	0.152	0.860	500
21371874			0.333	0.757	0.251	1.050	500
21385914		3/8-16 UNC, 3/8-20 UN	0.335	1.000	0.153	1.000	500

9001
ISO certification

PP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm				Packaging
			D	H	D1	H1	
			Outside diameter	Body height	Handle diameter	Handle height	Quantity per bag
21391674		3/8-24 UNF, 3/8-28 UN	8,89	22,38	4,90	20,57	500
21419164	M10		9,75	25,40	3,91	23,37	500
21421184	M10		9,75	50,80	5,18	50,80	250
21425004		7/16-14 UNC, 7/16-20 UNF, 7/16-16 UN	10,36	25,63	4,85	25,40	500
21446004		7/16-32 UN	11,28	25,40	6,48	25,15	500
21447164	M12	1/2-13 UNC, 1/2-16 UN	11,30	25,40	6,48	25,40	500
21448724	M12	1/2-13 UNC, 1/2-16 UN	11,30	50,80	5,72	50,80	250
21452144		1/2-20 UNF, 1/2-32 UN	11,99	25,40	6,17	25,40	500
21464844	M14		12,60	25,40	6,35	23,37	500
21469114	M14		12,60	50,80	6,68	50,80	250
21470034			12,95	25,40	6,50	20,83	500
21479114			13,46	25,40	6,35	25,40	500
21480994	M15	5/8-11 UNC	14,50	25,40	7,70	25,43	500
21502484	M16		15,54	25,40	6,35	25,40	500
21511674	M16		15,54	50,80	8,26	50,80	250
21521664	M17		16,26	25,40	9,53	25,40	100
21526424	M17		16,26	50,80	9,53	50,80	100
21537884	M18		17,96	31,75	9,53	33,68	100
21551004	M18		17,96	50,80	9,53	50,80	100
21568264			18,49	28,58	9,53	27,94	100
21582954	M20		19,56	25,40	9,53	23,55	100
21587564	M20		19,56	50,80	10,36	53,34	100
21589134	M24		20,50	31,75	10,87	31,75	100
21589504			22,56	25,40	9,45	25,40	100
21594494	M27		25,91	25,40	9,53	24,64	100
21615274			35,05	38,10	18,59	38,10	50

Part Number	Fits Metric Thread	Fits Imperial Thread	D	H	D1	H1	Quantity per bag
			Outside diameter	Body height	Handle diameter	Handle height	
			Dimensions in mm				Packaging



9001
ISO certification

PP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches				Packaging
			D	H	D1	H1	
			Outside diameter	Body height	Handle diameter	Handle height	Quantity per bag
21391674		3/8-24 UNF, 3/8-28 UN	0.350	0.881	0.193	0.810	500
21419164	M10		0.384	1.000	0.154	0.920	500
21421184	M10		0.384	2.000	0.204	2.000	250
21425004		7/16-14 UNC, 7/16-20 UNF, 7/16-16 UN	0.408	1.009	0.191	1.000	500
21446004		7/16-32 UN	0.444	1.000	0.255	0.990	500
21447164	M12	1/2-13 UNC, 1/2-16 UN	0.445	1.000	0.255	1.000	500
21448724	M12	1/2-13 UNC, 1/2-16 UN	0.445	2.000	0.225	2.000	250
21452144		1/2-20 UNF, 1/2-32 UN	0.472	1.000	0.243	1.000	500
21464844	M14		0.496	1.000	0.250	0.920	500
21469114	M14		0.496	2.000	0.263	2.000	250
21470034			0.510	1.000	0.256	0.820	500
21479114			0.530	1.000	0.250	1.000	500
21480994	M15	5/8-11 UNC	0.571	1.000	0.303	1.001	500
21502484	M16		0.612	1.000	0.250	1.000	500
21511674	M16		0.612	2.000	0.325	2.000	250
21521664	M17		0.640	1.000	0.375	1.000	100
21526424	M17		0.640	2.000	0.375	2.000	100
21537884	M18		0.707	1.250	0.375	1.326	100
21551004	M18		0.707	2.000	0.375	2.000	100
21568264			0.728	1.125	0.375	1.100	100
21582954	M20		0.770	1.000	0.375	0.927	100
21587564	M20		0.770	2.000	0.408	2.100	100
21589134	M24		0.807	1.250	0.428	1.250	100
21589504			0.888	1.000	0.372	1.000	100
21594494	M27		1.020	1.000	0.375	0.970	100
21615274			1.380	1.500	0.732	1.500	50

Part Number	Fits metric thread	Fits imperial thread	D	H	D1	H1	Quantity per bag
			Outside diameter	Body height	Handle diameter	Handle height	
			Dimensions in inches				Packaging



9001
ISO certification

SHPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Hollow Pull Plug

The SHPP-SH Series hollow pull plug's design is lighter and more conformable than a solid plug, with special suitability for masking holes in precision or bigger dimension components and irregular shapes. Inclusion of a pull-tab enables fast easy insertion and removal for speed and efficiency. This plug retains full integrity at high temperatures.

Material: Silicone (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Available in low temperature applications materials**

Black (-**BK**)
RAL 9005

Blue (-**BL**)
RAL 5002

Green (-**GN**)
RAL 6032

R. Red (-**RR**)
RAL 3022

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric hole	Fits imperial hole	Colour	Dimensions in mm				Packaging
				D	H	D1	H1	
				Outside diameter	Body height	Handle diameter	Handle height	Quantity per bag
21164324	21	0.827	Blue	23.37	57.66	12.70	61.98	100
21229804	25	0.984	Black	26.52	45.44	23.14	46.99	100
21354074	25	0.984	Green	26.52	120.42	23.52	134.11	25
21374764	30	1.181	Red	31.75	60.96	15.88	60.33	50
21466594	35	1.378	Blue	36.58	88.90	14.35	74.93	50
21585844	35	1.378	Green	36.58	164.01	23.37	180.09	50
21614284	40	1.575	Black	41.10	114.55	18.08	102.11	50
21671594	40	1.575	Green	41.66	79.25	16.51	67.26	50
21681824	45	1.772	Green	46.08	103.23	18.03	90.81	50
21682374	45	1.772	Blue	46.51	105.00	36.60	84.96	50
21687194	45	1.772	Blue	46.51	170.00	36.60	170.18	50
21726514	50	1.969	Red	51.05	69.85	20.42	44.45	50
21769804	55	2.165	Green	56.69	88.87	20.42	77.72	50
21812124	60	2.362	Red	61.44	168.00	51.51	147.57	50

Part Number	Fits metric hole	Fits imperial hole	Colour	D	H	D1	H1	Quantity per bag
				Outside diameter	Body height	Handle diameter	Handle height	
				Dimensions in mm				Packaging

9001
ISO certification

SHPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric hole	Fits imperial hole	Colour	Dimensions in inches				Packaging
				D	H	D1	H1	
				Outside diameter	Body height	Handle diameter	Handle height	Quantity per bag
21164324	21	0.827	Blue	0.920	2.270	0.500	2.440	100
21229804	25	0.984	Black	1.044	1.789	0.911	1.850	100
21354074	25	0.984	Green	1.044	4.741	0.926	5.280	25
21374764	30	1.181	Rusty Red	1.250	2.400	0.625	2.375	50
21466594	35	1.378	Blue	1.440	3.500	0.565	2.950	50
21585844	35	1.378	Green	1.440	6.457	0.920	7.090	50
21614284	40	1.575	Black	1.618	4.510	0.712	4.020	50
21671594	40	1.575	Green	1.640	3.120	0.650	2.648	50
21681824	45	1.772	Green	1.814	4.064	0.710	3.575	50
21682374	45	1.772	Blue	1.831	4.134	1.441	3.345	50
21687194	45	1.772	Blue	1.831	6.693	1.441	6.700	50
21726514	50	1.969	Rusty Red	2.010	2.750	0.804	1.750	50
21769804	55	2.165	Green	2.232	3.499	0.804	3.060	50
21812124	60	2.362	Rusty Red	2.419	6.614	2.028	5.810	50

Part Number	Fits metric hole	Fits imperial hole	Colour	D	H	D1	H1	Quantity per bag
				Outside diameter	Body height	Handle diameter	Handle height	
				Dimensions in inches				Packaging



9001
ISO certification

CSP-SH-Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Countersink Hole Plug

The CSP-SH Series countersink hole plug incorporates a ribbed structure that enables a snug plug fit to close and nominal hole sizes with adaptability in situations where precision is critical. The construction material is ideal for withstanding high temperature finishing processes, ensuring effective masking of angled faces of countersunk holes.



Material: Ultrabake™ (VMQ)
Temperature Resistance: 149°**C** / 300°**F**

***Also available as a double ended plug where both sides of the countersunk hole can be accessed**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits countersunk hole for metric screw	Fits countersunk hole for imperial screw	Colour	Dimensions in mm			Packaging
				D	D1	H	
				Outside diameter	Flange diameter	Body height	Quantity per bag
21315974		4-40	Blue	3.76	6.48	2.85	500
21612074		6-32	Red	4.30	7.79	2.57	500
21650914	M4	8-32	Black	4.99	8.96	3.41	500
21715784	M6	1/4-20. 1/4-28	Yellow	7.26	13.40	5.15	500

Part Number	Fits countersunk hole for metric screw	Fits countersunk hole for imperial screw	Colour	D	D1	H	Quantity per bag
				Outside diameter	Flange diameter	Body height	
				Dimensions in mm			Packaging

9001
ISO certification

CSP-SH-Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits countersunk hole for metric screw	Fits countersunk hole for imperial screw	Colour	Dimensions in inches			Packaging
				D	D1	H	
				Outside diameter	Flange diameter	Body height	Quantity per bag
21315974		4-40	Blue	0.148	0.255	0.112	500
21612074		6-32	Red	0.169	0.307	0.101	500
21650914	M4	8-32	Black	0.197	0.353	0.134	500
21715784	M6	1/4-20. 1/4-28	Yellow	0.286	0.528	0.203	500

Part Number	Fits countersunk hole for metric screw	Fits countersunk hole for imperial screw	Colour	D	D1	H	Quantity per bag
				Outside diameter	Flange diameter	Body height	
				Dimensions in inches			Packaging

9001
ISO certification

CSPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Countersink Hole Pull Plug

The CSPP-SH Series countersink hole pull plug combines heat resistance with user-friendly ergonomic design and precision engineering for tight fits that accurately mask the angled face of countersunk holes. The large diameter handle end makes manipulation easy during installation and removal. The result is effective masking and professional finish.



Material: Ultrabake™ **(VMQ)**
Temperature Resistance: 149**°C** / 300**°F**

***Also available as a single sided plug where one side of the countersunk hole cannot be accessed**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

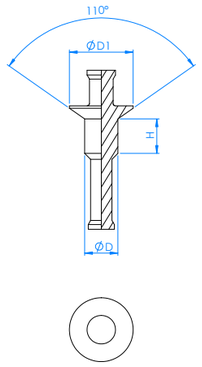

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits countersunk hole for metric screw	Fits countersunk hole for imperial screw	Colour	Dimensions in mm			Packaging
				D	D1	H	
				Outside diameter	Flange diameter	Body height	Quantity per bag
21133854		4-40	Blue	3.76	6.48	2.85	500
21192694		6-32	Red	4.30	7.79	2.57	500
21360604	M4	8-32	Black	4.99	8.96	3.41	500
21461114	M6	1/4-20. 1/4-28	Yellow	7.26	13.40	7.00	500

Part Number	Fits countersunk hole for metric screw	Fits countersunk hole for imperial screw	Colour	D	D1	H	Quantity per bag
				Outside diameter	Flange diameter	Body height	
				Dimensions in mm			Packaging

9001
ISO certification

CSPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits countersunk hole for metric screw	Fits countersunk hole for imperial screw	Colour	Dimensions in mm			Packaging
				D	D1	H	
				Outside diameter	Flange diameter	Body height	Quantity per bag
21133854		4-40	Blue	3.76	6.48	2.85	500
21192694		6-32	Red	4.30	7.79	2.57	500
21360604	M4	8-32	Black	4.99	8.96	3.41	500
21461114	M6	1/4-20. 1/4-28	Yellow	7.26	13.40	7.00	500

Part Number	Fits countersunk hole for metric screw	Fits countersunk hole for imperial screw	Colour	D	D1	H	Quantity per bag
				Outside diameter	Flange diameter	Body height	
				Dimensions in mm			Packaging

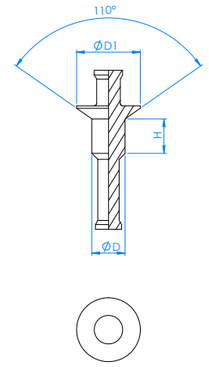

9001
ISO certification

BWNP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Blind Weld Nut Plug

The BWNP-SH Series plug masks at high temperature, and in situations where reaching both sides of the hole is not possible, or mask installation into the weld nut from one side is easier. The plug's temperature and process resilience ensure durable masking, without degrading, to maintain weld nut integrity and consistent finished product quality.

Material: Ultrabake™ **(VMQ)**
Temperature Resistance: 149**°C** / 300**°F**

***Also available as a plug where both sides of the weld nut are accessible**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Colour	Dimensions in mm				Packaging
			D1	D	D2	H	Quantity per bag
			Outside diameter	Flange diameter	Outside diameter	Height	
21213044	M6	Blue	4.62	8.71	5.99	4.93	500
21390874	M8	Red	6.35	10.69	8.00	6.15	500
21709194	M10	Green	8.00	12.19	10.24	7.70	250
21802484	M12	Yellow	9.78	14.61	12.37	9.32	250
21807344	M16	Orange	13.59	19.69	16.31	12.34	250

Part Number	Fits metric thread	Colour	D1	D	D2	H	Quantity per bag
			Outside diameter	Flange diameter	Outside diameter	Height	
			Dimensions in mm				Packaging

9001
ISO certification

BWNP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Colour	Dimensions in inches				Packaging
			D1	D	D2	H	Quantity per bag
			Outside diameter	Flange diameter	Outside diameter	Height	
21213044	M6	Blue	0.182	0.343	0.236	0.194	500
21390874	M8	Red	0.250	0.420	0.315	0.242	500
21709194	M10	Green	0.315	0.480	0.403	0.303	250
21802484	M12	Yellow	0.367	0.575	0.487	0.367	250
21807344	M16	Orange	0.535	0.775	0.642	0.486	250

Part Number	Fits metric thread	Colour	D1	D	D2	H	Quantity per bag
			Outside diameter	Flange diameter	Outside diameter	Height	
			Dimensions in inches				Packaging



9001
ISO certification

WNP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Weld Nut Pull Plug

The WNP-SH Series weld nut pull plug is designed specially to mask weld nuts in high temperature industrial finishing. Masking the threaded hole and face of the first and last thread in the nut means comprehensive protection, stopping material entering the threads or adhering to the nut face. A pull feature makes insertion or removal fast and easy.



Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Also available as a plug where both sides of the weld nut are accessible**

Green (-**GN**)
RAL 6024

Blue (-**BL**)
RAL 5002

Orange (-**OR**)
RAL 2008

Red (-**RD**)
RAL 3024

Yellow (-**YL**)
RAL 1016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Colour	Dimensions in mm			Dimensions in inches			Packaging
			D1	D	H	D1	D	H	
			Outside diameter	Flange diameter	Height	Outside diameter	Flange diameter	Height	Quantity per bag
21140054	M6	Blue	4.32	6.17	4.50	0.170	0.243	0.177	500
21162184	M8	Red	6.35	8.20	6.15	0.250	0.323	0.242	500
21231084	M10	Green	7.62	10.41	8.26	0.300	0.410	0.325	250
21317474	M12	Yellow	9.53	12.78	9.58	0.375	0.503	0.377	250
21467824	M16	Orange	12.07	16.71	12.70	0.475	0.658	0.500	250

Part Number	Fits metric thread	Colour	D1	D	H	D1	D	H	Quantity per bag
			Outside diameter	Flange diameter	Height	Outside diameter	Flange diameter	Height	
			Dimensions in mm			Dimensions in inches			Packaging

9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information and build your order with precision and confidence.

Precision Masking Solutions for MRO of Agricultural & Heavy-Duty Machinery

Caplugs offers advanced masking solutions engineered for MRO operations on agricultural and heavy-duty machinery. Our products are designed to protect critical components such as grounding studs, threaded holes, bushings, and raceways during maintenance, painting, powder coating, sandblasting, and other finishing processes, ensuring part integrity and system functionality.

Solutions available from Caplugs include:

- **High-temperature silicone caps & plugs can withstand up to 315°C**, suitable for oven curing, powder coating, and high-heat paint applications.

- **Neoprene caps & plugs provide abrasion resistance** for sandblasting, washing, or heavy-duty surface preparation.

- **Masking tapes & die-cut solutions** includes PC21 Green Polyester Tape (PC21-SH Series) for precise coverage and reduced masking time.

- **Custom engineered solutions** available in virtually any thread type, geometry, or size, including magnetic masks and pre-cut die forms for efficient MRO setup.

With Caplugs, maintenance and repair teams can eliminate cutting or trimming, minimise labour, and achieve consistent, high-quality masking results on every job.

More details about these products on our website

UWPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Standard Washer Pull Plug

The UWPP-SH washer pull plug masks plain or threaded holes to leave an exposed circular earthing area round each hole. Dual-purpose design works on countersunk holes to mask countersink faces and the masking process is streamlined, supporting cost-efficient operation. The plug is reusable and maintains integrity during high temperature processes.



Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Can be used with the UWM-SH Series to form a two piece-mask**

Yellow (-**YL**)
RAL 1016

Blue (-**BL**)
RAL 5002

Green (-**GN**)
RAL 6024

Grey (-**GY**)
RAL 9007

Pink (-**PK**)
RAL 4003

R. Red (-**RR**)
RAL 2010

Clear (-**CL**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Colour	Dimensions in mm						Packaging
			D	D1	D2	D3	H	H1	
			Outside diameter	Flange diameter	Handle diameter	Handle diameter	Body height	Height	Quantity per bag
21127004	M3	Blue	2.67	10.00	1.52	2.29	9.91	2.72	250
21145174	M4	Green	3.56	10.00	2.03	3.05	9.91	2.72	250
21444474	M4	Blue	3.56	10.00	2.03	3.05	22.23	3.40	250
21157244		Pink	4.24	12.70	2.41	3.56	9.91	2.72	250
21477504		Green	4.24	12.70	2.41	3.56	28.56	5.08	250
21175404	M5	Clear	4.47	10.00	2.54	3.81	9.91	2.72	250
21243974		Yellow	4.90	14.27	2.79	4.06	9.91	2.72	250
21536094		Black	4.90	14.27	2.79	4.06	31.75	6.10	250
21344074	M6	White	5.36	15.01	3.05	4.57	9.91	4.19	250
21655464	M6	Red	5.36	15.01	3.05	4.57	38.10	6.07	250
21387424		Green	5.72	15.88	3.25	4.83	9.91	2.72	250
21432054	M8	Grey	7.19	15.01	4.09	6.10	9.91	4.19	250
21465754		Clear	7.21	17.48	4.11	6.10	9.91	4.19	250
21476364		Grey	8.69	20.62	4.95	7.37	9.91	4.19	100
21583614	M10	Yellow	9.53	19.99	5.44	8.13	9.91	5.33	100
21673484		White	10.16	23.42	5.79	8.64	9.91	5.33	100
21782554	M12	Pink	10.87	19.99	6.20	9.14	9.91	5.33	100
21893734		Blue	11.66	26.92	6.65	9.91	9.91	5.33	100
Part Number	Fits metric thread	Colour	D	D1	D2	D3	H	H1	Quantity per bag
			Outside diameter	Flange diameter	Handle diameter	Handle diameter	Body height	Height	
			Dimensions in mm						Packaging

9001
ISO certification

Visit **www.caplugs.eu** for full product information and build your order with precision and confidence.

UWPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

White (-**WT**)
RAL 9016

Black (-**BK**)
RAL 9005



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits imperial thread	Colour	Dimensions in inches						Packaging
			D	D1	D2	D3	H	H1	
			Outside diameter	Flange diameter	Handle diameter	Handle diameter	Body height	Height	Quantity per bag
21127004		Blue	0.105	0.394	0.060	0.090	0.390	0.107	250
21145174		Green	0.140	0.394	0.080	0.120	0.390	0.107	250
21444474		Blue	0.140	0.394	0.080	0.190	0.875	0.134	250
21157244	10-24	Pink	0.167	0.500	0.095	0.140	0.390	0.107	250
21477504	10-24	Green	0.167	0.500	0.095	0.225	1.125	0.200	250
21175404		Clear	0.176	0.394	0.100	0.150	0.390	0.107	250
21243974	12-24	Yellow	0.193	0.562	0.110	0.160	0.390	0.107	250
21536094	12-24	Black	0.193	0.562	0.110	0.225	1.250	0.240	250
21344074		White	0.211	0.591	0.120	0.180	0.390	0.165	250
21655464		Red	0.211	0.591	0.120	0.250	1.500	0.239	250
21387424	1/4-20	Green	0.225	0.625	0.128	0.190	0.390	0.107	250
21432054		Grey	0.283	0.591	0.161	0.240	0.390	0.165	250
21465754	5/16-18	Clear	0.284	0.688	0.162	0.240	0.390	0.165	250
21476364	3/8-16	Grey	0.338	0.803	0.194	0.288	0.390	0.179	100
21583614		Yellow	0.379	0.760	0.210	0.317	0.390	0.218	100
21673484	7/16-14	White	0.400	0.922	0.228	0.340	0.390	0.210	100
21782554		Pink	0.428	0.787	0.244	0.360	0.390	0.210	100
21893734	1/2-13	Blue	0.459	1.060	0.262	0.390	0.390	0.210	100
Part Number	Fits imperial thread	Colour	D	D1	D2	D3	H	H1	Quantity per bag
			Outside diameter	Flange diameter	Handle diameter	Handle diameter	Body height	Height	
			Dimensions in inches						Packaging

9001
ISO certification

Our engineering experts are ready to help you with fully customised solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

UWPPLS-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Long Washer Pull Plug

The UWPPLS-SH Series washer pull plug, long series, provides effective masking for plain and threaded holes in deeper, or harder-to-reach, areas where a standard-length plug is ineffective. The design leaves a circular earthing area, masking countersink faces for a high precision finish. High temperature functionality and reusability are built in.

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Can be used with the UWM-SH Series to form a two-piece mask**

Black (-**BK**)
RAL 9005

Blue (-**BL**)
RAL 5002

Green (-**GN**)
RAL 6024

R. Red (-**RR**)
RAL 2010

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Colour	Dimensions in mm						Packaging
			D	D1	D2	H	H1	H2	
			Outside diameter	Flange diameter	Handle diameter	Body height	Handle height	Handle height	Quantity per bag
21444474	M4	Blue	3.56	10.01	4.83	22.23	25.40	13.21	250
21477504		Green	4.24	12.70	5.72	28.58	34.93	15.24	250
21536094		Black	4.90	14.27	5.72	38.10	31.75	16.51	250
21655464	M6	Red	5.36	15.01	6.35	38.10	44.45	15.49	250

Part Number	Fits metric thread	Colour	D	D1	D2	H	H1	H2	Quantity per bag
			Outside diameter	Flange diameter	Handle diameter	Body height	Handle height	Handle height	
			Dimensions in mm						Packaging

9001
ISO certification

UWPPLS-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits imperial thread	Colour	Dimensions in inches						Packaging
			D	D1	D2	H	H1	H2	
			Outside diameter	Flange diameter	Handle diameter	Body height	Handle height	Handle height	Quantity per bag
21444474		Blue	0.140	0.394	0.190	0.875	1.000	0.520	250
21477504	10-24	Green	0.167	0.500	0.225	1.125	1.375	0.600	250
21536094	12-24	Black	0.193	0.562	0.225	1.500	1.250	0.650	250
21655464		Red	0.211	0.591	0.250	1.500	1.750	0.610	250

Part Number	Fits imperial thread	Colour	D	D1	D2	H	H1	H2	Quantity per bag
			Outside diameter	Flange diameter	Handle diameter	Body height	Handle height	Handle height	
			Dimensions in inches						Packaging



9001
ISO certification

UWM-SH Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Washer Mask Cap

The UWM-SH Series washer mask covers plain and threaded studs with precision masking, while maintaining an exposed area around the stud edge for earthing purposes. Reapplication multiple times is possible, streamlining process efficiency and reducing materials usage. The mask is very effective at high temperatures without distorting or degrading.

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Can be used with UWPP-SH and UWPPLS-SH Series to form a two-piece mask**

Black (-**BK**)
RAL 9005

Blue (-**BL**)
RAL 5002

Green (-**GN**)
RAL 6032

R. Red (-**RR**)
RAL 2010

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



***For more information visit our website: www.caplugs.eu**

Part Number	To fit pull plug	Colour	Dimensions in mm			Dimensions in inches			Packaging
			D	d	D1	D	d	D1	Quantity per bag
			Outside diameter	Inside diameter	Outside diameter	Outside diameter	Inside diameter	Outside diameter	
21352824	21444474	Blue	10.01	3.25	5.33	0.394	0.128	0.210	500
21148984	21477504	Green	12.70	3.81	7.87	0.500	0.150	0.310	500
21204024	21536094	Black	14.27	4.57	7.37	0.562	0.180	0.290	500
21584774	21655464	Rusty Red	15.01	5.08	7.87	0.591	0.200	0.310	500

Part Number	To fit pull plug	Colour	D	d	D1	D	d	D1	Quantity per bag
			Outside diameter	Inside diameter	Outside diameter	Outside diameter	Inside diameter	Outside diameter	
			Dimensions in mm			Dimensions in inches			Packaging

9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

Engineered for Efficiency: Masking Solutions Made for You

When standard masking solutions don't fit, our engineers work one-on-one with you to design a custom device tailored to your application. From understanding your needs to prototyping and final production, we guide you every step of the way.

Benefits of Custom Masking:

- **Boost productivity and streamline your production line**
- **Achieve consistent, high-quality finishing results**
- **Minimise costly errors and rework**
- **Reduce overall production costs with ready-to-use solutions**

See how much a custom solution could save you. Get in touch with our masking experts and discover the potential time and cost savings.

HFPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Hollow-Flanged Pull Plug

The HFPP-SH Series hollow-flanged pull plug includes a two-stage diameter, large and small, for easy insertion and removal. The plug masks holes effectively and a hollow core allows passage of liquids, necessary in certain coating processes. Construction material supports high temperature operation while maintaining integrity and accurate masking.

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Solid pull plugs without flange are also available**

Yellow (-**YL**)
RAL 1016

Blue (-**BL**)
RAL 5002

Green (-**GN**)
RAL 6024

Red (-**RD**)
RAL 3000

Grey (-**GY**)
RAL 9007

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website:
www.caplugs.eu

Part Number	Fits metric thread	Colour	Dimensions in mm					Packaging
			D	D1	D2	H	H1	Quantity per bag
			Outside diameter	Flange diameter	Outside diameter	Body height	Height	
21119004	M6	Blue	5.00	6.81	4.45	23.62	26.70	1000
21302314	M8	Yellow	7.70	8.79	4.72	23.67	61.19	500
21445654	M10	Red	8.51	11.18	7.11	25.40	63.09	500
21451104	M12	Green	10.59	13.00	8.38	28.58	76.61	250
21718594	M14	Blue	13.21	14.61	7.75	29.85	79.63	250
21777624	M16	Grey	15.39	17.91	8.00	30.51	83.01	250
21877304	M20	Yellow	17.15	20.32	12.95	31.75	85.60	250

Part Number	Fits metric thread	Colour	D	D1	D2	H	H1	Quantity per bag
			Outside diameter	Flange diameter	Outside diameter	Body height	Height	
			Dimensions in mm					Packaging

9001
ISO certification

HFPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website:
www.caplugs.eu

Part Number	Fits metric thread	Colour	Dimensions in inches					Packaging
			D	D1	D2	H	H1	Quantity per bag
			Outside diameter	Flange diameter	Outside diameter	Body height	Height	
21119004	M6	Blue	0.197	0.268	0.175	0.930	1.051	1000
21302314	M8	Yellow	0.303	0.346	0.186	0.932	2.409	500
21445654	M10	Red	0.335	0.440	0.280	1.000	2.484	500
21451104	M12	Green	0.417	0.512	0.330	1.125	3.016	250
21718594	M14	Blue	0.520	0.575	0.305	1.175	3.135	250
21777624	M16	Grey	0.606	0.705	0.315	1.201	3.268	250
21877304	M20	Yellow	0.675	0.800	0.510	1.250	3.370	250

Part Number	Fits metric thread	Colour	D	D1	D2	H	H1	Quantity per bag
			Outside diameter	Flange diameter	Outside diameter	Body height	Height	
			Dimensions in inches					Packaging



9001
ISO certification

DFPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Dual Flanged Pull Plug

The DFPP-SH Series dual flanged pull plug is designed to mask weld and regular nuts during industrial finishing processes. The shape enables effective masking of the chamfer, first and last thread of the weld nut, for comprehensive protection. Resistant to air pressure blow out, this plug withstands high temperature operations without degrading.

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Solid pull plugs without a flange are also available**

Purple (-**PL**)
RAL 4008

Green (-**GN**)
RAL 6024

Red (-**RD**)
RAL 3024

R. Red (-**RR**)
RAL 2010

Blue (-**BL**)
RAL 5002

White (-**WT**)
RAL 9016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

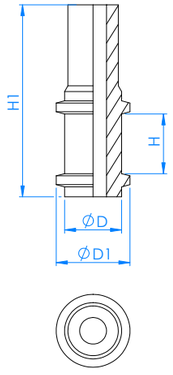

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Colour	Dimensions in mm				Packaging
			D	D1	H	H1	Quantity per bag
			Outside diameter	Flange diameter	Body height	Height	
21157834	M6	Green	5.00	7.80	6.81	32.99	1000
21186524	M8	Red	6.71	9.50	7.90	34.01	1000
21411034	M10	Green	8.51	11.30	8.99	35.00	500
21676374	M12	Purple	10.31	13.00	11.61	45.01	250
21775504	M16	White	13.49	16.99	14.00	50.01	250
21961884	M20	Blue	16.99	21.01	18.01	57.99	100

Part Number	Fits metric thread	Colour	D	D1	H	H1	Quantity per bag
			Outside diameter	Flange diameter	Body height	Height	
			Dimensions in mm				Packaging

9001
ISO certification

DFPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Colour	Dimensions in inches				Packaging
			D	D1	H	H1	Quantity per bag
			Outside diameter	Flange diameter	Body height	Height	
21157834	M6	Green	0.197	0.307	0.268	1.299	1000
21186524	M8	Red	0.264	0.374	0.311	1.339	1000
21411034	M10	Green	0.335	0.445	0.354	1.378	500
21676374	M12	Purple	0.406	0.512	0.457	1.772	250
21775504	M16	White	0.531	0.669	0.551	1.969	250
21961884	M20	Blue	0.669	0.827	0.709	2.238	100

Part Number	Fits metric thread	Colour	D	D1	H	H1	Quantity per bag
			Outside diameter	Flange diameter	Body height	Height	
			Dimensions in inches				Packaging

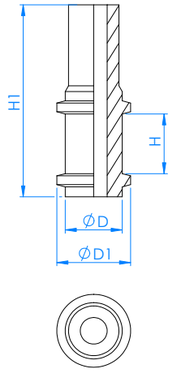

9001
ISO certification

LEPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Pull Tab Plug

The LEPP-SH Series masking plug has a large pull tab at one end to allow for ease of removal by finger, without tools that could damage threads, or component surfaces. Leading and exit threads are masked with a single plug, to stop seeping and achieve a clean professional finish. Plug integrity is maintained throughout high temperature processes.



Material: Ultrabake™ **(VMQ)**
Temperature Resistance: 315°**C** / 600°**F**

***Colour coded for size identification**



Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Colour	Dimensions in mm				Packaging
			D	D1	D2	H	Quantity per bag
			Outside diameter	Flange diameter	Flange diameter	Height	
21302014	M6	Yellow	5.00	8.00	7.19	6.60	500
21354704		Pink	6.35	8.71	8.71	6.25	500
21425494	M8	Green	6.60	10.49	9.19	8.20	500
21650054		Blue	7.80	10.59	10.59	7.70	250
21736724	M10	Red	8.41	13.00	10.80	9.09	250
21745014		Green	9.09	12.29	12.29	8.79	250
21961324	M12	Orange	10.01	15.01	13.21	11.00	250

Part Number	Fits metric thread	Colour	D	D1	D2	H	Quantity per bag
			Outside diameter	Flange diameter	Flange diameter	Height	
			Dimensions in mm				Packaging

9001
ISO certification

LEPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Colour	Dimensions in inches				Packaging
			D	D1	D2	H	Quantity per bag
			Outside diameter	Flange diameter	Flange diameter	Height	
21302014	M6	Yellow	0.197	0.315	0.283	0.260	500
21354704		Pink	0.250	0.343	0.343	0.246	500
21425494	M8	Green	0.260	0.413	0.362	0.323	500
21650054		Blue	0.307	0.417	0.417	0.303	250
21736724	M10	Red	0.331	0.512	0.425	0.358	250
21745014		Green	0.358	0.484	0.484	0.346	250
21961324	M12	Orange	0.394	0.591	0.520	0.433	250

Part Number	Fits metric thread	Colour	D	D1	D2	H	Quantity per bag
			Outside diameter	Flange diameter	Flange diameter	Height	
			Dimensions in inches				Packaging



9001
ISO certification

UDPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Dual Purpose Plug

UDPP-SH Series dual purpose plug incorporates innovative design, conveniently shaped to work with round or square, and non-threaded or threaded holes. Tapering ensures a snug fit, whether masking small holes in precision components or protecting larger threaded openings. The plug functions repeatedly and reliably in high temperature processes.

Material: Ultrabake™ **(VMQ)**
Temperature Resistance: 315**°C** / 600**°F**

***Colour coded for size identification**

R. Red (-**RR**)
RAL 2010

Purple (-**PL**)
RAL 4008

Green (-**GN**)
RAL 6032

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

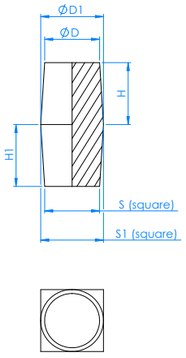

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Round End Dimensions in mm			Square End Dimensions in mm			Packaging
		D	D1	H	S	S1	H1	Quantity per bag
		Outside diameter	Outside diameter	Height	Outside square	Outside square	Height	
21467024	Purple	9.53	12.70	15.88	9.53	12.70	15.88	250
21499994	Red	12.70	15.88	19.05	12.70	15.88	19.05	250
21586754	Green	15.88	19.05	19.05	15.88	19.05	19.05	100
21953234	Red	22.23	25.40	25.40	22.23	25.40	25.40	100

Part Number	Colour	D	D1	H	S	S1	H1	Quantity per bag
		Outside diameter	Outside diameter	Height	Outside square	Outside square	Height	
		Round End Dimensions in mm			Square End Dimensions in mm			Packaging

9001
ISO certification

UDPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

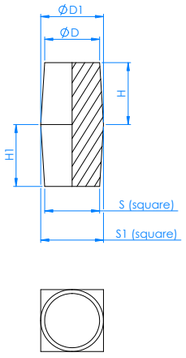

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Round End Dimensions in inches			Square End Dimensions in inches			Packaging
		D	D1	H	S	S1	H1	Quantity per bag
		Outside diameter	Outside diameter	Height	Outside square	Outside square	Height	
21467024	Purple	0.375	0.500	0.625	0.375	0.500	0.625	250
21499994	Red	0.500	0.625	0.750	0.500	0.625	0.750	250
21586754	Green	0.625	0.750	0.750	0.625	0.750	0.750	100
21953234	Red	0.875	1.000	1.000	0.875	1.000	1.000	100

Part Number	Colour	D	D1	H	S	S1	H1	Quantity per bag
		Outside diameter	Outside diameter	Height	Outside square	Outside square	Height	
		Round End Dimensions in inches			Square End Dimensions in inches			Packaging

9001
ISO certification

UMFP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Multi-Flanged Plug

The UMFP-SH Series multi-flanged plug includes distinctive design features. Flexible fins allow close fit with multiple hole sizes while the built-in ergonomic raised handle increases visibility and makes application or removal fast and easy. This plug is suitable for repeated cost-effective use and has the durability for high temperature working.

Material: Ultrabake™ **(VMQ)**
Temperature Resistance: 315°**C** / 600°**F**

***Colour coded for size identification**

R. Red (-**RR**)
RAL 2010

Blue (-**BL**)
RAL 5002

Green (-**GN**)
RAL 6032

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

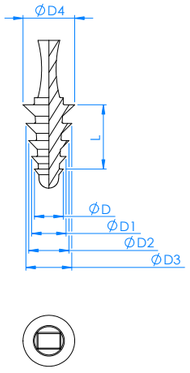

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm						Packaging
		D	D1	D2	D3	D4	L	Quantity per bag
		Outside diameter	Outside diameter	Outside diameter	Outside diameter	Outside diameter	Body length	
21225564	Blue	4.00	6.00	8.00	10.00		13.70	250
21269164	Rusty Red	8.00	10.00	12.00	14.00	16.00	28.82	100
21432044	Green	10.00	12.00	14.00	16.00	18.00	22.70	100

Part Number	Colour	D	D1	D2	D3	D4	L	Quantity per bag
		Outside diameter	Outside diameter	Outside diameter	Outside diameter	Outside diameter	Body length	
		Dimensions in mm						Packaging

9001
ISO certification

UMFP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in inches						Packaging
		D	D1	D2	D3	D4	L	Quantity per bag
		Outside diameter	Outside diameter	Outside diameter	Outside diameter	Outside diameter	Body length	
21225564	Blue	0.157	0.236	0.315	0.394		0.539	250
21269164	Rusty Red	0.315	0.394	0.472	0.551	0.630	1.135	100
21432044	Green	0.394	0.472	0.551	0.630	0.709	0.894	100

Part Number	Colour	D	D1	D2	D3	D4	L	Quantity per bag
		Outside diameter	Outside diameter	Outside diameter	Outside diameter	Outside diameter	Body length	
		Dimensions in inches						Packaging

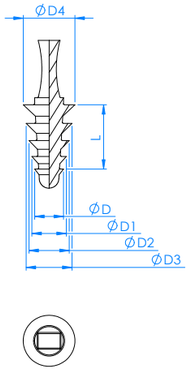

9001
ISO certification

PTM-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Venting Nipple Mask

The PTM-SH Series thread mask is contoured to protect internally-threaded tubing ends from coating material entry. The design has an outer rib to increase grip on internal threading. A tear-away venting nipple releases gas build-up during curing processes, to minimise risk of imperfections. Effective protection continues at high temperature.

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Stays watertight if the venting feature is not removed**

Yellow (-YL)
RAL 1016

Blue (-**BL**)
RAL 5002

Green (-**GN**)
RAL 6032

Pink (-**PK**)
RAL 4003

Purple (-**PL**)
RAL 4008

Clear (-**CL**)
RAL 9003

White (-**WT**)
RAL 9016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm				Packaging
		D	D1	H	H1	Quantity per bag
		Outside diameter	Flange diameter	Height	Overall height	
21225784	Pink	18.34	22.50	15.24	33.66	100
21295014	Yellow	23.65	27.81	15.24	34.04	100
21367124	Clear	29.62	33.99	17.78	36.58	50
21547354	Green	38.53	43.26	19.05	37.85	50
21612004	White	44.50	50.06	18.42	37.21	50
21723654	Blue	56.52	61.98	18.42	37.47	25
21772304	Purple	83.69	89.15	18.42	37.47	25

Part Number	Colour	D	D1	H	H1	Quantity per bag
		Outside diameter	Flange diameter	Height	Overall height	
		Dimensions in mm				Packaging



9001
ISO certification

PTM-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in inches				Packaging
		D	D1	H	H1	Quantity per bag
		Outside diameter	Flange diameter	Height	Overall height	
21225784	Pink	0.722	0.886	0.600	1.325	100
21295014	Yellow	0.931	1.095	0.600	1.340	100
21367124	Clear	1.166	1.338	0.700	1.440	50
21547354	Green	1.517	1.703	0.750	1.490	50
21612004	White	1.752	1.971	0.725	1.465	50
21723654	Blue	2.225	2.440	0.725	1.475	25
21772304	Purple	3.295	3.510	0.725	1.475	25

Part Number	Colour	D	D1	H	H1	Quantity per bag
		Outside diameter	Flange diameter	Height	Overall height	
		Dimensions in inches				Packaging





9001
ISO certification

UTM-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Standard Mask Plug

The UTM-SH Series thread mask is designed specifically to mask off the hole itself and the first thread. The standard shallow design applies to blind holes and the long series is applicable to extended sealing areas. All versions can accommodate different threading depths, are flexible and reusable, and can withstand high temperature operations.

Material: Ultrabake™ **(VMQ)**
Temperature Resistance: 315°**C** / 600°**F**

***Also available in a long handle version**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Colour	Dimensions in mm				Packaging
				D	D1	H	H1	
				Outside diameter	Flange diameter	Height	Overall height	Quantity per bag
21235014	M6		Clear	5.28	6.30	5.00	14.00	500
21410964		1/4-20 UNC	Yellow	5.54	6.60	5.08	11.43	500
21439534		5/16-18 UNC	Green	7.06	8.13	5.08	12.70	500
21514284	M8		Blue	7.19	8.41	5.00	12.24	500
21626674		3/8-16 UNC	White	8.53	9.78	6.35	15.24	500
21668394	M10		Pink	9.09	10.39	7.01	16.00	250
21734884		7/16-14 UNC	Pink	9.96	11.18	8.89	19.05	250
21782434	M12		Rusty Red	10.82	12.42	8.79	20.12	250
21782964		1/2-13 UNC	Clear	11.46	12.95	8.89	19.05	250
21941494	M16		Green	14.81	16.61	11.00	23.01	100
21969664	M20		Yellow	18.39	20.60	13.00	28.50	100

Part Number	Fits metric thread	Fits imperial thread	Colour	D	D1	H	H1	Quantity per bag
				Outside diameter	Flange diameter	Height	Overall height	
				Dimensions in mm				Packaging

9001
ISO certification

UTM-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Colour	Dimensions in inches				Packaging
				D	D1	H	H1	
				Outside diameter	Flange diameter	Height	Overall height	Quantity per bag
21235014	M6		Clear	0.208	0.248	0.197	0.551	500
21410964		1/4-20 UNC	Yellow	0.218	0.260	0.200	0.450	500
21439534		5/16-18 UNC	Green	0.278	0.320	0.200	0.500	500
21514284	M8		Blue	0.283	0.331	0.197	0.482	500
21626674		3/8-16 UNC	White	0.336	0.385	0.250	0.600	500
21668394	M10		Pink	0.358	0.409	0.276	0.630	250
21734884		7/16-14 UNC	Pink	0.392	0.440	0.350	0.750	250
21782434	M12		Rusty Red	0.426	0.489	0.346	0.792	250
21782964		1/2-13 UNC	Clear	0.451	0.510	0.350	0.750	250
21941494	M16		Green	0.583	0.654	0.433	0.906	100
21969664	M20		Yellow	0.724	0.811	0.512	1.122	100

Part Number	Fits metric thread	Fits imperial thread	Colour	D	D1	H	H1	Quantity per bag
				Outside diameter	Flange diameter	Height	Overall height	
				Dimensions in inches				Packaging





9001
ISO certification

UTMLS-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Long Mask Plug

The UTMLS-SH Series thread mask is available in a specialised long version, for effective hole and first thread masking of an extended sealing area. Deeper seal protection from coating materials remains effective at high temperatures, where integrity and performance are maintained consistently. Flexible and durable, the mask can be used repeatedly.

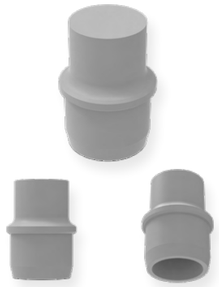



Material: Ultrabake™ **(VMQ)**
Temperature Resistance: 315°**C** / 600°**F**

***Also available in a short handle version**

Also available in: Yellow (-**YL**) RAL 1016, Clear (-**CL**) RAL 9003, White (-**WT**) RAL 9016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Colour	Dimensions in mm				Packaging
				D	D1	H	H1	
				Outside diameter	Flange diameter	Height	Overall height	Quantity per bag
21271634	M3		Red	2.72	3.51	5.33	20.83	1000
21300774	M4		Pink	3.59	4.09	5.84	21.84	1000
21315124	M5		Purple	4.52	5.26	5.59	20.83	500
21507514	M6		Clear	5.28	6.30	7.49	24.49	500
21571544		1/4-20 UNC	Yellow	5.54	6.60	7.09	23.42	500
21579544		1/4-36 UNS	Blue	5.54	6.60	6.86	23.42	500
21600204		5/16-18 UNC	Green	7.06	8.13	7.09	22.71	500
21687264		5/16-40 UNS	Rusty Red	7.06	8.13	7.09	22.71	250
21733584	M8		Blue	7.19	8.41	7.49	22.76	500
21741834		3/8-16 UNC	White	8.53	9.78	8.36	25.25	250
21803454		3/8-36 UNS	Yellow	8.53	9.78	8.36	25.25	250
21948464	M10		Pink	9.09	10.39	7.01	24.00	250
21953664	M24		Grey	22.76	24.05	16.00	37.85	50

Part Number	Fits metric thread	Fits imperial thread	Colour	D	D1	H	H1	Quantity per bag
				Outside diameter	Flange diameter	Height	Overall height	
				Dimensions in mm				Packaging

9001
ISO certification

UTMLS-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88





*For more information visit our website: **www.caplugs.eu**

Part Number	Fits Metric Thread	Fits Imperial Thread	Colour	Dimensions in inches				Packaging
				D	D1	H	H1	
				Outside diameter	Flange diameter	Height	Overall height	Quantity per bag
21271634	M3		Red	0.107	0.138	0.210	0.820	1000
21300774	M4		Pink	0.141	0.161	0.230	0.860	1000
21315124	M5		Purple	0.178	0.207	0.220	0.820	500
21507514	M6		Clear	0.208	0.248	0.295	0.964	500
21571544		1/4-20 UNC	Yellow	0.218	0.260	0.279	0.922	500
21579544		1/4-36 UNS	Blue	0.232	0.260	0.270	0.922	500
21600204		5/16-18 UNC	Green	0.278	0.320	0.279	0.894	500
21687264		5/16-40 UNS	Rusty Red	0.296	0.320	0.279	0.894	250
21733584	M8		Blue	0.283	0.331	0.295	0.896	500
21741834		3/8-16 UNC	White	0.336	0.385	0.329	0.994	250
21803454		3/8-36 UNS	Yellow	0.357	0.385	0.329	0.994	250
21948464	M10		Pink	0.358	0.409	0.276	0.945	250
21953664	M24		Grey	0.896	0.947	0.630	1,490	50

Part Number	Fits Metric Thread	Fits Imperial Thread	Colour	D	D1	H	H1	Quantity per bag
				Outside diameter	Flange diameter	Height	Overall height	
				Dimensions in inches				Packaging

9001
ISO certification

UFP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Flangeless Plug

The UFP-SH Series flangeless plug has a tapered design and hollow core for use in threaded and non-threaded holes. The shape gives a precise fit to seal the hole and prevent unwanted finishing materials entry. Threaded holes are masked with edge-of-plug precision for a clean professional finish and this reusable plug works at higher temperatures.

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Also available in other materials for low temperature applications**

Blue (-**BL**)
RAL 5014

R. Red (-**RR**)
RAL 2010

Green (-**GN**)
RAL 6024

Grey (-**GY**)
RAL 9022

Purple (-**PL**)
RAL 4008

Red (-**RD**)
RAL 3018

Yellow (-**YL**)
RAL 1016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits Metric Thread	Fits Imperial Thread	Colour	Dimensions in mm			Packaging
				D	D1	H	
				Outside diameter	Outside diameter	Height	Quantity per bag
21101884	M5, M6	10-24 UNC, 10-32 UNF, 12-24 UNC, 12-28 UNF, 1/4-20 UNC, 1/4-28 UNF	Clear	3.99	5.84	25.40	250
21147074	M8	5/16-18 UNC, 5/16-20 UN, 5/16-24 UNF, 5/16-28 UN	Black	5.61	8.00	25.40	250
21170064	M10	3/8-16 UNC, 3/8-20 UN, 3/8-24 UNF, 3/8-28 UN, 7/16-14 UNC, 7/16-16 UN	Yellow	8.00	9.65	25.40	250
21187514	M12	7/16-20 UNF, 7/16-32 UN, 1/2-13 UNC, 1/2-16 UN	Clear	9.65	11.94	25.40	250
21196714			Red	10.92	13.34	24.99	250
21205644	M14, M15	1/2-32 UN, 5/8-11UNC	Blue	12.19	14.61	25.40	250
21242964	M16		Purple	13.61	16.00	25.40	250
21289384	M17, M18		Rusty Red	16.00	18.00	25.40	250
21289804	M20		Green	18.00	19.99	25.40	100
21291884	M22		Grey	19.00	22.00	25.40	100
21374624	M24		Clear	22.00	24.00	25.40	100
21481614	M27		Black	24.00	26.00	25.40	100
21511004			Green	26.00	28.00	25.40	100
21520684	M30		Purple	27.00	29.13	25.40	50
21568954			Blue	27.99	30.00	25.40	50
21724604			Rusty Red	29.01	31.01	25.40	50
21957804			Yellow	30.00	31.90	25.40	50
Part Number	Fits Metric Thread	Fits Imperial Thread	Colour	D / Outside diameter	D1 / Outside diameter	H / Height	Quantity per bag
				Dimensions in mm			Packaging

9001
ISO certification

Visit **www.caplugs.eu** for full product information and build your order with precision and confidence.

UFP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Clear (-**CL**)
RAL 9003

Black (-**BK**)
RAL 9005



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits Metric Thread	Fits Imperial Thread	Colour	Dimensions in inches			Packaging
				D	D1	H	
				Outside diameter	Outside diameter	Height	Quantity per bag
21101884	M5, M6	10-24 UNC, 10-32 UNF, 12-24 UNC, 12-28 UNF, 1/4-20 UNC, 1/4-28 UNF	Clear	0.157	0.230	1,000	250
21147074	M8	5/16-18 UNC, 5/16-20 UN, 5/16-24 UNF, 5/16-28 UN	Black	0.221	0.315	1,000	250
21170064	M10	3/8-16 UNC, 3/8-20 UN, 3/8-24 UNF, 3/8-28 UN, 7/16-14 UNC, 7/16-16 UN	Yellow	0.315	0.380	1,000	250
21187514	M12	7/16-20 UNF, 7/16-32 UN, 1/2-13 UNC, 1/2-16 UN	Clear	0.380	0.470	1,000	250
21196714			Red	0.430	0.525	0.984	250
21205644	M14, M15	1/2-32 UN, 5/8-11UNC	Blue	0.480	0.575	1,000	250
21242964	M16		Purple	0.536	0.630	1,000	250
21289384	M17, M18		Rusty Red	0.630	0.709	1,000	250
21289804	M20		Green	0.709	0.787	1,000	100
21291884	M22		Grey	0.787	0.866	1,000	100
21374624	M24		Clear	0.866	0.945	1,000	100
21481614	M27		Black	0.945	1,024	1,000	100
21511004			Green	1,024	1,102	1,000	100
21520684	M30		Purple	1,063	1,147	1,000	50
21568954			Blue	1,102	1,181	1,000	50
21724604			Rusty Red	1,142	1,220	1,000	50
21957804			Yellow	1,181	1,256	1,000	50
Part Number	Fits Metric Thread	Fits Imperial Thread	Colour	D / Outside diameter	D1 / Outside diameter	H / Height	Quantity per bag
				Dimensions in inches			Packaging

9001
ISO certification

Our engineering experts are ready to help you with fully customised solutions at **sales.eu@caplugs.com** or call on **+3173 643 02 88**.

FP-SH Series

Non-Threaded Plugs

Flangeless Plug

The FP-SH Series flangeless plug incorporates a tapered design and hollow core, enabling the same plug to be used in both threaded and non-threaded holes. The shape ensures snug sealing to effectively exclude finishing materials from holes, while moderate heat temperature resistance maintains shape and protection all through the finishing process.

Material: Acrylonitrile Butadiene Rubber
Temperature Resistance: 149°**C** / 300°**F**

***Also available in other materials for high temperature applications**

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in mm			Dimensions in inches			Packaging
			D	D1	H	D	D1	H	
			Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	Quantity per bag
21157504	M5, M6	10-24 UNC, 10-32 UNF, 12-24 UNC, 12-28 UNF, 1/4-20 UNC, 1/4-28 UNF	3.99	5.84	25.40	0.157	0.230	1.000	250
21254744	M8	5/16-18 UNC, 5/16-20 UN, 5/16-24 UNF, 5/16-28 UN	5.61	8.00	25.40	0.221	0.315	1.000	250
21317104	M10	3/8-16 UNC, 3/8-20 UN, 3/8-24 UNF, 3/8-28 UN, 7/16-14 UNC, 7/16-16 UN	8.00	9.65	25.40	0.315	0.380	1.000	250
21367154	M12	7/16-20 UNF, 7/16-32 UN, 1/2-13 UNC, 1/2-16 UN	9.65	11.94	25.40	0.380	0.470	1.000	250
21413224	M14, M15	1/2-32 UN, 5/8-11UNC	12.19	14.61	25.40	0.480	0.575	1.000	250
21551924	M16		13.61	16.00	25.40	0.536	0.630	1.000	250
21552324	M17, M18		16.00	18.00	25.40	0.630	0.709	1.000	250
21639894	M20		18.00	19.99	25.40	0.709	0.787	1.000	100
21651034	M22		19.00	22.00	25.40	0.787	0.866	1.000	100
21660144	M24		22.00	24.00	25.40	0.866	0.945	1.000	100
21842594	M27		24.00	26.00	25.40	0.945	1.024	1.000	100
21961714			26.00	28.00	25.40	1.024	1.102	1.000	100
Part Number	Fits metric thread	Fits imperial thread	D	D1	H	D	D1	H	Quantity per bag
			Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	
			Dimensions in mm			Dimensions in inches			Packaging

9001
ISO certification

HTP Series

Non-Threaded Plugs

Small Tapered Plug

The HTP Series flexible tapered plug provides small holes masking where precision and reliability are critical. The adaptable design enables quick changes for efficient operation, and conformity to component diameters for strong and effective sealing against unwanted material entry. The plug is durable in challenging conditions or high temperature operations.

Material: Flex500™ (PVC)
Temperature Resistance: 149°**C** / 300°**F**

***Also available in other materials for low temperature applications**

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging	
	D	D1	H	D	D1	H		
	Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	Carton quantity	Mini pack quantity
40113461	1.78	3.81	15.88	0.070	0.150	0.625	5000	1000
40207961	2.54	5.08	12.70	0.100	0.200	0.500	5000	1000
40326721	3.56	6.35	19.05	0.140	0.250	0.750	5000	1000
40484131	3.56	7.62	25.40	0.140	0.300	1.000	5000	1000
40495371	4.06	7.87	19.05	0.160	0.310	0.750	5000	1000
40553291	4.83	7.87	25.40	0.190	0.310	1.000	5000	1000
40956591	4.83	8.64	19.05	0.190	0.340	0.750	5000	1000
Part Number	D	D1	H	D	D1	H	Carton quantity	Mini pack quantity
	Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height		
	Dimensions in mm			Dimensions in inches			Packaging	

9001
ISO certification

UW-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Dual Washer Plug

The UW-SH Series washer plug incorporates a dual-purpose, two-sided design that allows it to fit two different hole sizes. The result is greater versatility, and streamlining of the masking process, to enhance process efficiency. The fit is equally snug for both sizes, providing robust, durable protection against contaminants at high temperatures.

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Plugs without the flange area are also available**

Blue (-**BL**)
RAL 5002

Red (-**RD**)
RAL 3024

Yellow (-**YL**)
RAL 1016

Green (-**GN**)
RAL 6024

Pink (-**PK**)
RAL 4003

Black (-**BK**)
RAL 9005

Clear (-**CL**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

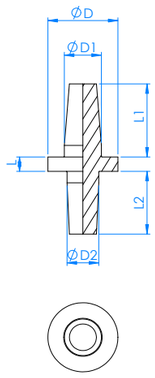

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Colour	Dimensions in mm						Packaging
			D1	L1	D2	L2	D	L	
			Outside diameter	Length	Outside diameter	Length	Flange diameter	Flange thickness	Quantity per bag
21104574		Yellow	2.44	8.84	3.25	12.80	6.35	5.00	1000
21124064	M3	Green	2.79	5.59	3.71	7.39	7.00	5.00	1000
21135504		Clear	3.15	9.78	6.40	12.98	8.10	5.51	1000
21193544		Green	3.23	9.68	4.72	12.62	12.75	5.13	500
21253804		Yellow	3.23	9.09	6.50	12.85	15.88	4.85	500
21306274		Black	3.40	12.45	3.99	12.75	7.92	4.90	1000
21351644		Pink	3.48	11.53	4.06	12.88	9.65	4.98	1000
21410984	M4	Pink	3.61	7.19	4.70	9.40	8.99	5.00	1000
21486654	M5	Clear	4.50	8.99	5.69	11.40	10.00	5.00	1000
21551934		Red	5.03	12.50	6.96	12.70	9.53	5.03	500
21641874	M6	Red	5.31	10.59	6.71	13.41	12.50	5.00	500
21683134		Blue	6.20	12.93	6.53	13.11	12.83	4.90	500
21750764	M8	Black	7.11	14.20	8.71	17.40	16.99	5.00	500
21767754	M10	Yellow	9.60	19.20	10.69	21.41	21.00	5.00	250
21794514	M12	Clear	10.90	21.79	12.70	25.40	24.00	5.00	250

Part Number	Fits metric thread	Colour	D1	L1	D2	L2	D	L	Quantity per bag
			Outside diameter	Length	Outside diameter	Length	Flange diameter	Flange thickness	
			Dimensions in mm						Packaging

9001
ISO certification

UW-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits imperial thread	Colour	Dimensions in inches						Packaging
			D1	L1	D2	L2	D	L	
			Outside diameter	Length	Outside diameter	Length	Flange diameter	Flange thickness	Quantity per bag
21104574	4-40 UNC, 5-40 UNC, 5-44 UNF	Yellow	0.096	0.348	0.128	0.504	0.250	0.197	1000
21124064		Green	0.110	0.220	0.146	0.291	0.276	0.197	1000
21135504	6-32 UNC, 6-40 UNF	Clear	0.124	0.385	0.252	0.511	0.319	0.217	1000
21193544		Green	0.127	0.381	0.186	0.497	0.502	0.202	500
21253804		Yellow	0.127	0.358	0.256	0.506	0.625	0.191	500
21306274	8-32 UNC, 8-36 UNF	Black	0.134	0.490	0.157	0.502	0.312	0.193	1000
21351644		Pink	0.137	0.454	0.160	0.507	0.380	0.196	1000
21410984		Pink	0.142	0.283	0.185	0.370	0.354	0.197	1000
21486654		Clear	0.177	0.354	0.224	0.449	0.394	0.197	1000
21551934		Red	0.198	0.492	0.274	0.500	0.375	0.198	500
21641874		Red	0.209	0.417	0.264	0.528	0.492	0.197	500
21683134	1/4-20 UNC, 1/4-28 UNF	Blue	0.244	0.509	0.257	0.516	0.505	0.193	500
21750764		Black	0.280	0.559	0.343	0.685	0.669	0.197	500
21767754		Yellow	0.378	0.756	0.421	0.843	0.827	0.197	250
21794514		Clear	0.429	0.858	0.500	1.000	0.945	0.197	250

Part Number	Fits imperial thread	Colour	D1	L1	D2	L2	D	L	Quantity per bag
			Outside diameter	Length	Outside diameter	Length	Flange diameter	Flange thickness	
			Dimensions in inches						Packaging

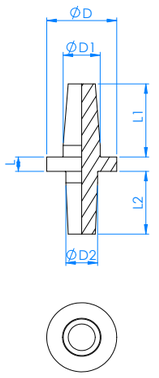

9001
ISO certification

SWP Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Washer Plug

The SWP Series washer plug can be applied to mask around a hole leaving an exposed circular area for earthing. Or it can work as a versatile dual plug, flexibly adapting to fit different hole sizes. Easy to install and remove, the plug can be reused cost-effectively and works without degrading for effective protection in high temperature processes.

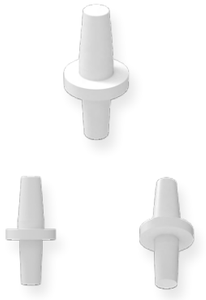



Material: Silicone (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Plugs without the flange area are also available**

Clear (-**CL**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



9001
ISO certification

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits Metric Thread	Fits Imperial Thread	Dimensions in mm						Packaging
			D1	L1	D2	L2	D	L	
			Outside diameter	Length	Outside diameter	Length	Flange diameter	Flange thickness	Quantity per bag
21115074	M4	8-32 UNC, 8-36 UNF, 12-28 UNF	3,30	12,70	3,81	12,70	9,53	5,33	1000
21186034			3,56	12,70	4,57	12,70	6,35	5,33	1000
21311374			3,56	12,70	4,57	12,70	7,92	5,33	1000
21320174	M6		3,56	12,70	5,08	12,70	9,53	5,33	500
21456784		10-24 UNC	3,94	12,70	5,84	12,70	7,92	5,33	500
21485444		12-24 UNC	4,57	12,70	4,57	12,70	9,53	5,33	500
21666484			5,08	12,70	5,84	12,70	7,92	5,33	500
21687154			6,05	12,70	6,35	12,70	9,53	5,33	500
21689764	M14		6,05	12,70	6,35	12,70	12,70	5,33	250
21747934			6,99	12,70	9,53	12,70	12,70	5,33	250
21757234	M12	7/16-14 UNC, 1/2-16 UN, 1/2-20 UNF	9,53	12,70	11,56	12,70	12,70	5,33	250
21957764	M18	5/8-11 UNC	14,00	12,70	17,50	12,70	19,99	5,33	100

Part Number	Fits Metric Thread	Fits Imperial Thread	D1	L1	D2	L2	D	L	Quantity per bag
			Outside diameter	Length	Outside diameter	Length	Flange diameter	Flange thickness	
			Dimensions in mm						Packaging

SWP Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Fits imperial thread	Dimensions in inches						Packaging
			D1	L1	D2	L2	D	L	
			Outside diameter	Length	Outside diameter	Length	Flange diameter	Flange thickness	Quantity per bag
21115074	M4	8-32 UNC, 8-36 UNF, 12-28 UNF	0.130	0.500	0.150	0.500	0.375	0.210	1000
21186034			0.140	0.500	0.180	0.500	0.250	0.210	1000
21311374			0.140	0.500	0.180	0.500	0.312	0.210	1000
21320174	M6		0.140	0.500	0.200	0.500	0.375	0.210	500
21456784		10-24 UNC	0.155	0.500	0.230	0.500	0.312	0.210	500
21485444		12-24 UNC	0.180	0.500	0.180	0.500	0.375	0.210	500
21666484			0.200	0.500	0.230	0.500	0.312	0.210	500
21687154			0.238	0.500	0.250	0.500	0.375	0.210	500
21689764	M14		0.238	0.500	0.250	0.500	0.500	0.210	250
21747934			0.275	0.500	0.375	0.500	0.500	0.210	250
21757234	M12	7/16-14 UNC, 1/2-16 UN, 1/2-20 UNF	0.375	0.500	0.455	0.500	0.500	0.210	250
21957764	M18	5/8-11 UNC	0.551	0.500	0.689	0.500	0.787	0.210	100

Part Number	Fits metric thread	Fits imperial thread	D1	L1	D2	L2	D	L	Quantity per bag
			Outside diameter	Length	Outside diameter	Length	Flange diameter	Flange thickness	
			Dimensions in inches						Packaging



9001
ISO certification

SP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Step Plug

The SP-SH Series step plug protects non-threaded and threaded holes, streamlines the masking process as a result of the step design and leaves a circular earthing area around the hole. The built-in wide handle enables easy plug installation and removal to support efficiency. Structural integrity is maintained even during high temperature processes.

Material: Ultrabake™ **(VMQ)**
Temperature Resistance: 315°**C** / 600°**F**

***Colour coded for size identification**

White (-**WT**)
RAL 9016

Green (-**GN**)
RAL 5018

Blue (-**BL**)
RAL 5014

Purple (-**PL**)
RAL 4008

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Colour	Dimensions in mm					Packaging
			D1	D2	L	D	L1	Quantity per bag
			Outside diameter	Outside diameter	Body length	Flange diameter	Flange height	
21472124	M3	Blue	3.00	2.36	13.00	7.00	7.00	500
21567694	M4	Green	5.00	2.84	14.00	8.00	7.00	500
21587594	M5	Purple	6.00	3.93	16.02	8.99	8.99	500
21608994	M6	Black	6.42	4.77	16.76	10.16	10.16	250
21712604	M8	White	8.51	5.94	17.32	12.42	9.75	250

Part Number	Fits metric thread	Colour	D1	D2	L	D	L1	Quantity per bag
			Outside diameter	Outside diameter	Body length	Flange diameter	Flange height	
			Dimensions in mm					Packaging

9001
ISO certification

SP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Colour	Dimensions in inches					Packaging
			D1	D2	L	D	L1	Quantity per bag
			Outside diameter	Outside diameter	Body length	Flange diameter	Flange height	
21472124	M3	Blue	0.118	0.093	0.512	0.276	0.276	500
21567694	M4	Green	0.197	0.112	0.551	0.315	0.315	500
21587594	M5	Purple	0.236	0.155	0.631	0.354	0.354	500
21608994	M6	Black	0.253	0.188	0.660	0.400	0.400	250
21712604	M8	White	0.335	0.234	0.682	0.489	0.384	250

Part Number	Fits metric thread	Colour	D1	D2	L	D	L1	Quantity per bag
			Outside diameter	Outside diameter	Body length	Flange diameter	Flange height	
			Dimensions in inches					Packaging



9001
ISO certification

SFP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Flanged Plug

The SFP-SH Series flanged plug is of a versatile design, suitable for use as a cap on longer studs. Masking threaded and non-threaded holes, the plug adapts to hole sizes to offer flexibility. Masking off the hole and first thread of a threaded hole for a clean and consistent finish, integrity and protection are provided even at high temperatures.

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Can also be used as a cap**



Clear (-**CL**)
RAL 9003

Grey (-**GY**)
RAL 9022

Pink (-**PK**)
RAL 4003

Yellow (-**YL**)
RAL 1016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Colour	Dimensions in mm					Packaging
			D	D1	d	L1	L	
			Outside diameter	Flange diameter	Inside diameter	Handle length	Overall length	Quantity per bag
21211974	M8	Yellow	7.39	11.99	4.50	11.99	42.01	250
21212144	M10	Pink	8.71	14.71	7.01	13.00	46.99	250
21669084	M12	Clear	10.69	15.80	8.00	14.00	51.00	250
21861744	M14	Grey	13.69	18.01	10.59	15.01	64.01	250

Part Number	Fits metric thread	Colour	D	D1	d	L1	L	Quantity per bag
			Outside diameter	Flange diameter	Inside diameter	Handle length	Overall length	
			Dimensions in mm					Packaging

9001
ISO certification

SFP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Fits metric thread	Colour	Dimensions in inches					Packaging
			D	D1	d	L1	L	
			Outside diameter	Flange diameter	Inside diameter	Handle length	Overall length	Quantity per bag
21211974	M8	Yellow	0.291	0.472	0.177	0.472	1.654	250
21212144	M10	Pink	0.343	0.579	0.276	0.512	1.850	250
21669084	M12	Clear	0.421	0.622	0.315	0.551	2.008	250
21861744	M14	Grey	0.539	0.709	0.417	0.591	2.520	250

Part Number	Fits metric thread	Colour	D	D1	d	L1	L	Quantity per bag
			Outside diameter	Flange diameter	Inside diameter	Handle length	Overall length	
			Dimensions in inches					Packaging



9001
ISO certification

HWP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Hollow Washer Plug

The HWP-SH Series hollow washer plug's construction makes it easy to handle while allowing flexibility. The high-temperature-resistant plug compresses to fit both plain and threaded hole sizes, and its built-in washer-like flange serves a dual purpose. It makes installation and removal easy and keeps the area around the hole clean free for earthing.

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Can also be used as a cap**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm			Dimensions in inches			Packaging
		D	D1	H	D	D1	H	Quantity per bag
		Outside diameter	Flange diameter	Height	Outside diameter	Flange diameter	Height	
21270974	Clear	6.30	12.50	23.00	0.248	0.492	0.906	200
21341654	Black	8.50	16.00	25.00	0.335	0.630	0.984	200
21640804	Yellow	10.00	16.51	28.00	0.394	0.650	1,102	200
21733784	Blue	14.00	19.00	36.00	0.551	0.748	1,417	200
21744584	Purple	17.50	25.00	38.00	0.689	0.984	1,496	200
21755584	Rusty Red	19.50	28.00	51.00	0.768	1,102	2,008	100
21799144	Grey	20.80	25.40	49.00	0.819	1,000	1,929	100
21835434	Clear	22.00	30.99	53.00	0.866	1,220	2,087	100

Part Number	Colour	D	D1	H	D	D1	H	Quantity per bag
		Outside diameter	Flange diameter	Height	Outside diameter	Flange diameter	Height	
		Dimensions in mm			Dimensions in inches			Packaging

9001
ISO certification

MSP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Flexible High Temperature Plug

The MSP-SH Series masking plug is of flexible construction to enable easy installation and removal in situations where efficiency is a priority. Up-to-the-edge hole masking allows for a professional precision finish and reduces defects or inconsistencies. The plug offers excellent resistance for consistent performance in high temperature processes.

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Also available in other materials for low temperature applications**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm			Dimensions in inches			Packaging
		D	D1	H	D	D1	H	Quantity per bag
		Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	
21117034	Green	1.57	4.75	19.05	0.062	0.187	0.750	1000
21194524	Yellow	3.18	6.35	25.40	0.125	0.250	1.000	1000
21311034	Clear	4.75	8.71	25.40	0.187	0.343	1.000	1000
21339454	Red	6.35	11.10	25.40	0.250	0.437	1.000	1000
21356464	White	8.03	14.15	25.40	0.316	0.557	1.000	500
21409684	Pink	11.10	17.45	25.40	0.437	0.687	1.000	500
21551214	Clear	14.27	19.05	25.40	0.562	0.750	1.000	250
21573804	Clear	15.88	20.32	25.40	0.625	0.800	1.000	250
21698464	Clear	19.05	23.50	25.40	0.750	0.925	1.000	250

Part Number	Colour	D	D1	H	D	D1	H	Quantity per bag
		Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	
		Dimensions in mm			Dimensions in inches			Packaging

9001
ISO certification

MPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Miscellaneous Plug

The MPP-SH Series plug is designed to work adaptably with non-threaded and threaded holes. Different types are available to mask diverse hole sizes and configurations while providing an optimal fit and seal and excellent levels of in-process performance. Consistent edge-of-plug finishing is enabled for accuracy, as is high temperature durability.



Material: Refer to product table
Temperature Resistance: Refer to product table

***Also available in other materials for low temperature applications**

Red (-**RD**)
RAL 3024

Green (-**GN**)
RAL 6032

Yellow (-**YL**)
RAL 1016

Clear (-**CL**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Material	Maximum temperature		Dimensions in mm			Packaging
			Degrees C	Degrees F	D Outside diameter	D1 Outside diameter	H Height	Quantity per bag
21201844	Clear	Ultrabake™ (VMQ)	315	600	3.18	9.53	31.75	500
21231914	Red	Ethylene Propylene Diene Monomer (EPDM)	177	350	3.18	9.53	31.75	500
21272764	Clear	Ultrabake™ (VMQ)	315	600	3.18	12.70	50.80	500
21328634	Green	Neoprene (CR)	177	350	3.18	12.70	50.80	500
21405444	Clear	Ultrabake™ (VMQ)	315	600	0.41	1.57	15.88	500
21445284	Yellow	Ultrabake™ (VMQ)	315	600	0.41	1.57	15.88	500
21592114	Clear	Ultrabake™ (VMQ)	315	600	0.51	1.98	25.40	500
21852344	Yellow	Ultrabake™ (VMQ)	315	600	0.51	1.98	25.40	500

Part Number	Colour	Material	Degrees C	Degrees F	D Outside diameter	D1 Outside diameter	H Height	Quantity per bag
			Maximum temperature		Dimensions in mm			Packaging

9001
ISO certification

MPP-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Material	Maximum temperature		Dimensions in inches			Packaging
			Degrees C	Degrees F	D Outside diameter	D1 Outside diameter	H Height	Quantity per bag
21201844	Clear	Ultrabake™ (VMQ)	315	600	0.125	0.375	1.250	500
21231914	Red	Ethylene Propylene Diene Monomer (EPDM)	177	350	0.125	0.375	1.250	500
21272764	Clear	Ultrabake™ (VMQ)	315	600	0.125	0.500	2.000	500
21328634	Green	Neoprene (CR)	177	350	0.125	0.500	2.000	500
21405444	Clear	Ultrabake™ (VMQ)	315	600	0.016	0.062	0.625	500
21445284	Yellow	Ultrabake™ (VMQ)	315	600	0.016	0.062	0.625	500
21592114	Clear	Ultrabake™ (VMQ)	315	600	0.020	0.078	1.000	500
21852344	Yellow	Ultrabake™ (VMQ)	315	600	0.020	0.078	1.000	500

Part Number	Colour	Material	Degrees C	Degrees F	D Outside diameter	D1 Outside diameter	H Height	Quantity per bag
			Maximum temperature		Dimensions in inches			Packaging





9001
ISO certification

MT-SH Series

Masking Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

‘Mouse Tail’ Plug

The MT-SH Series plug has a slim and flexible design to protect extremely small hole sizes, with a very snug, leak-proof fit that eliminates even the smallest gap. High precision ensures the protected component’s integrity, even in processes involving higher temperatures and chemicals. The plug is capable of multiple reuse for cost-effectiveness.

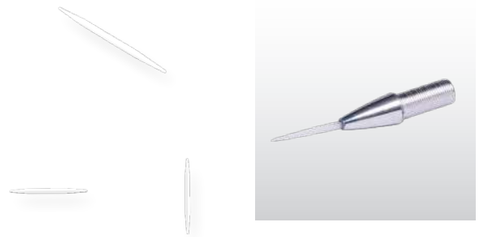

Material: Refer to product table
Temperature Resistance: Refer to product table

***Also available in other materials for low temperature applications**

Clear (-**CL**)
RAL 9003

Yellow (-**YL**)
RAL 1016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Maximum temperature Degrees C	Maximum temperature Degrees F	Dimensions in mm				Packaging
				D	D1	H	H1	
				Outside diameter	Outside diameter	Length	Taper length	Quantity per bag
21141904	Ultrabake™ (VMQ)	315	600	0.64	2.03	50.80	12.70	500
21333604	Ethylene Propylene Diene Monomer (EPDM)	149	300	0.64	2.03	50.80	12.70	500

Part Number	Material	Maximum temperature Degrees C	Maximum temperature Degrees F	D	D1	H	H1	Quantity per bag
				Outside diameter	Outside diameter	Length	Taper length	
				Dimensions in mm				Packaging

9001
ISO certification

MT-SH Series

Masking Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Maximum temperature Degrees C	Maximum temperature Degrees F	Dimensions in inches				Packaging
				D	D1	H	H1	
				Outside diameter	Outside diameter	Length	Taper length	Quantity per bag
21141904	Ultrabake™ (VMQ)	315	600	0.025	0.080	2.000	0.500	500
21333604	Ethylene Propylene Diene Monomer (EPDM)	149	300	0.025	0.080	2.000	0.500	500

Part Number	Material	Maximum temperature Degrees C	Maximum temperature Degrees F	D	D1	H	H1	Quantity per bag
				Outside diameter	Outside diameter	Length	Taper length	
				Dimensions in inches				Packaging



9001
ISO certification

UHCP-SH Series

Non-Threaded Plugs

Hollow Cone Plug

The UHCP-SH Series plug robustly protects both plain and threaded hole interiors, with a hollow tapered design to enable precise up-to-edge finishing. Flexibly conformable to non-standard hole shapes, the plug withstands high-temperature processes without losing integrity. Reusability multiple times delivers both efficiency and cost-effectiveness.

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Can be used for slotted or oval holes**

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

R. Red (-**RR**)
RAL 2010

Blue (-**BL**)
RAL 5002

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm			Dimensions in inches			Packaging
		D	D1	H	D	D1	H	Quantity per bag
		Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	
21363354	Rusty Red	3.73	14.73	48.26	0.147	0.580	1.900	250
21713064	Blue	10.00	20.00	74.00	0.394	0.787	1.900	100

Part Number	Colour	D	D1	H	D	D1	H	Quantity per bag
		Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	
		Dimensions in mm			Dimensions in inches			Packaging

9001
ISO certification

RCK-SH Series

Non-Threaded Plugs

Regular Plug

The RCK-SH Series plug protects plain holes, threaded and plain bores, particularly during painting or for transportation. Customisation, for non-standard applications or unique component dimensions, is enabled by cutting the plug to a required length. Temperature resistance is suitable for moderate heat exposure, and multiple reuse is possible.

Material: Cork (CK)
Temperature Resistance: 149°**C** / 300°**F**

***Also available in other materials for high temperature applications**

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



Natural (-**NC**)
-

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	D	D1	H	D	D1	H	Quantity per box
	Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	
34114651	2.38	4.76	12.70	0.093	0.187	0.500	1000
34150881	3.97	6.35	12.70	0.156	0.250	0.500	1000
34173731	5.56	7.94	12.70	0.218	0.312	0.500	1000
34220281	7.14	9.53	12.70	0.281	0.375	0.500	1000
34251321	8.33	11.11	15.88	0.328	0.437	0.625	1000
34265261	9.53	12.70	17.46	0.375	0.500	0.689	1000
34266721	10.72	14.29	19.05	0.421	0.562	0.750	1000
34274191	11.91	15.88	20.65	0.468	0.625	0.813	1000
34287921	13.49	17.46	22.23	0.531	0.687	0.875	1000
34324781	14.68	19.05	23.81	0.578	0.750	0.938	1000
34356611	15.88	20.64	25.40	0.625	0.812	1.000	1000
34361631	17.07	22.23	26.99	0.671	0.875	1.063	1000
34402891	18.65	23.81	28.58	0.734	0.937	1.125	100
34404691	19.45	25.40	31.75	0.765	1.000	1.250	100
34414201	21.03	26.99	31.75	0.828	1.062	1.250	100
34436431	22.62	28.58	31.75	0.890	1.125	1.250	100
34480551	24.21	30.16	31.75	0.953	1.187	1.250	100
34494851	25.80	31.75	31.75	1.015	1.250	1.250	100
34510421	27.38	33.34	31.75	1.078	1.312	1.250	100
34529301	27.78	34.93	38.10	1.093	1.375	1.500	100
34532501	29.37	36.51	38.10	1.156	1.437	1.500	100
34533931	30.96	38.10	38.10	1.218	1.500	1.500	100

9001
ISO certification

RCK-SH Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	D	D1	H	D	D1	H	Quantity per box
	Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	
34540571	32.54	39.69	38.10	1.281	1.562	1.500	100
34546921	34.13	41.28	38.10	1.343	1.625	1.500	100
34569821	37.31	44.45	38.10	1.468	1.750	1.500	100
34589911	40.48	47.63	38.10	1.593	1.875	1.500	100
34597321	43.66	50.80	38.10	1.718	2.000	1.500	100
34601371	46.83	53.98	38.10	1.843	2.125	1.500	100
34647021	50.01	57.15	38.10	1.968	2.250	1.500	100

Part Number	D	D1	H	D	D1	H	Quantity per box
	Outside diameter	Outside diameter	Height	Outside diameter	Outside diameter	Height	
	Dimensions in mm			Dimensions in inches			Packaging



9001
ISO certification

STPS-SH Series

Self-Threading Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Hangable Handle Plug

The STPS-SH Series plug is designed to self-thread, tapping into protected materials to create a secure, leak and chemical proof seal. The built-in hanging handles enable easy storage and handling during processing. Temperature resistance ensures the plug retains structural integrity and sealing capability, for consistent finished product quality.

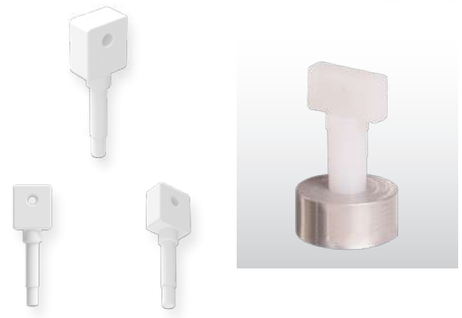

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 82°**C** / 180°**F**

***Handle has a hole for hanging the part**

White (-**WT**)
RAL 9016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Fits thread sizes		Packaging
	from	to	Quantity per bag
19628104	1/4-20	1/4-28	100
19202614	5/16-18	5/16-24	100
19297664	3/8-16	3/8-24	100
19415804	1/2-13	1/2-20	100
19417194	2-56	2-64	500
19434204	3-48	3-56	500
19610354	4-40	4-48	500
19676024	6-32	6-40	500
19685884	8-32	8-36	500
19764424	10-24	10-32	500
19808904	12-24	12-28	100

Part Number	from	to	Quantity per bag
	Fits thread sizes		Packaging

9001
ISO certification

Masking Miscellaneous

When Precise Yet Flexible Protection is Critical

Caplugs miscellaneous masking solutions comprise specialised products, tailored to perform multiple tasks within industrial settings. Innovative solutions include custom-shaped caps, durable tapes, and flexible sleeves, for precise protection during finishing processes that include spraying, coating, and electroplating.

Each product ensures optimal coverage of not-for-treatment areas. Custom-shaped caps accurately shield complex geometries, while durable tapes guard straight edges and curves, preventing bleed-through and ensuring sharp lines. Flexible sleeves are ideal for adjustable covering of elongated parts.

This coverage accuracy is vital in industries such as aerospace manufacturing, precision engineering, and custom automotive finishing, where detail is paramount. Ease of application and removal saves time and errors, reducing reworking and enhancing overall workflow efficiency.

More details about these products on our website

BM-SH Series

Masking Miscellaneous

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Bore Mask

The BM-SH Series mask protects highly precision-machined surfaces from damage, maintaining bore hole integrity during painting or blasting. With the mask in place the bore hole internal diameter stays free of paint, removing the need for any post-process cleaning. Ease of installation and paint residue elimination make one-time use cost-effective.

Material: Refer to product table.
Temperature Resistance: Refer to product table.

***Also available in other materials for high temperature applications**

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	D	L	W	D	L	W	Quantity per bag
	Outside diameter	Length	Wall thickness	Outside diameter	Length	Wall thickness	
21135724	22.00	55.00	1.75	0.866	2.165	0.069	240
21160334	26.00	60.00	1.75	1.024	2.362	0.069	220
21168864	28.00	47.00	2.00	1.102	1.850	0.079	450
21178124	31.00	40.00	1.50	1.220	1.575	0.059	75
21184114	32.00	95.00	2.00	1.260	3.740	0.079	325
21186044	32.80	56.50	2.50	1.291	2.224	0.098	600
21186354	34.20	125.00	1.50	1.346	4.921	0.059	250
21187144	36.00	60.00	1.50	1.417	2.362	0.059	100
21194314	36.00	90.00	1.50	1.417	3.543	0.059	200
21199844	39.30	76.00	2.50	1.547	2.992	0.098	300
21201734	39.50	51.00	2.00	1.555	2.008	0.079	350
21205464	41.30	75.00	1.50	1.626	2.953	0.059	200
21207654	41.30	145.00	2.00	1.626	5.709	0.079	120
21212904	41.50	50.00	2.00	1.634	1.969	0.079	325
21214074	42.00	58.00	2.40	1.654	2.283	0.094	500
21216444	43.00	80.00	2.50	1.693	3.150	0.098	200
21228874	45.70	75.50	2.50	1.799	2.972	0.098	250
21231284	45.70	160.00	2.50	1.799	6.299	0.098	80
21237964	46.30	25.00	2.00	1.823	0.984	0.079	500
21238344	46.30	75.00	1.50	1.823	2.953	0.059	175
21247604	46.30	90.00	2.50	1.823	3.543	0.098	120
21257034	46.30	120.00	2.50	1.823	4.724	0.098	100

9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

BM-SH Series

Masking Miscellaneous

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	D	L	W	D	L	W	Quantity per bag
	Outside diameter	Length	Wall thickness	Outside diameter	Length	Wall thickness	
21261764	46.30	170.00	1.50	1.823	6.693	0.059	280
21265704	46.30	195.00	1.50	1.823	7.677	0.059	60
21293234	49.30	40.00	1.50	1.941	1.575	0.059	340
21294264	51.30	75.00	2.50	2.020	2.953	0.098	100
21306644	51.50	40.00	3.00	2.028	1.575	0.118	350
21310174	51.50	155.00	2.50	2.028	6.102	0.098	75
21312714	51.50	195.00	3.00	2.028	7.677	0.118	50
21312784	51.50	200.00	3.00	2.028	7.874	0.118	50
21313584	51.60	25.00	2.00	2.031	0.984	0.079	400
21319894	51.60	69.00	1.70	2.031	2.717	0.067	150
21325824	51.60	75.00	5.00	2.031	2.953	0.197	120
21326114	51.60	165.00	2.00	2.031	6.496	0.079	60
21344224	56.70	55.00	1.50	2.232	2.165	0.059	200
21349354	56.70	105.00	5.00	2.232	4.134	0.197	80
21365534	59.60	40.00	1.50	2.346	1.575	0.059	200
21366214	61.50	52.00	6.00	2.421	2.047	0.236	150
21366244	61.50	70.00	1.50	2.421	2.756	0.059	60
21370774	61.50	105.00	1.50	2.421	4.134	0.059	170
21384604	64.80	42.00	6.00	2.551	1.654	0.236	150
21386104	66.80	56.00	1.60	2.630	2.205	0.063	90
21391954	66.80	80.00	2.50	2.630	3.150	0.098	120
21392734	66.80	110.00	2.50	2.630	4.331	0.098	50
21399764	71.50	185.00	4.00	2.815	7.283	0.157	30
21404264	71.80	45.00	4.00	2.827	1.772	0.157	120
21405354	71.80	85.00	5.00	2.827	3.346	0.197	60
21421584	71.80	90.00	2.50	2.827	3.543	0.098	60
21427194	73.00	66.00	3.50	2.874	2.598	0.138	80
21427614	73.30	135.00	3.00	2.886	5.315	0.118	40
21434434	76.50	50.00	6.00	3.012	1.969	0.236	90
21436704	77.10	95.00	5.00	3.035	3.740	0.197	50
21438454	79.60	65.00	5.00	3.134	2.559	0.197	60
21447254	81.50	52.00	6.00	3.209	2.047	0.236	80
21453604	81.90	35.00	2.00	3.224	1.378	0.079	110
21454514	81.90	60.00	5.00	3.224	2.362	0.197	70
21454904	84.20	11.00	5.50	3.315	0.433	0.217	500
21472854	86.50	50.00	3.50	3.406	1.969	0.138	60
21489624	86.50	295.00	3.50	3.406	11.614	0.138	15





9001
ISO certification

caplugs

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

BM-SH Series

Masking Miscellaneous

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging
	D	L	W	D	L	W	Quantity per bag
	Outside diameter	Length	Wall thickness	Outside diameter	Length	Wall thickness	
21498164	91.50	38.00	2.25	3.602	1.496	0.089	100
21513314	91.50	65.00	3.00	3.602	2.559	0.118	80
21515124	103.40	62.00	6.00	4.071	2.441	0.236	40
21515254	104.50	200.00	5.00	4.114	7.874	0.197	10
21518984	107.70	29.00	4.80	4.240	1.142	0.189	80
21525214	112.80	60.00	6.00	4.441	2.362	0.236	30
21531814	121.80	57.00	6.00	4.795	2.244	0.236	30
21538994	131.10	90.00	5.00	5.161	3.543	0.197	15
21544764	237.50	240.00	6.00	9.350	9.449	0.236	5

Part Number	D	L	W	D	L	W	Quantity per bag
	Outside diameter	Length	Wall thickness	Outside diameter	Length	Wall thickness	
	Dimensions in mm			Dimensions in inches			Packaging





9001
ISO certification

CSC Series

Masking Miscellaneous

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

'Shower' Cap

The CSC Series 'shower' cap offers very versatile protection from contaminants, dust, and moisture. Transparent, stretchable and very easy to fit and secure, the masking film enables identification of secured items through the robust barrier to external elements. Quick application and removal are ideal for frequent changes or temporary protection.

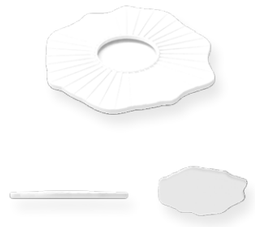



Material: Polyethylene (PET)
Temperature Resistance: 66°**C** / 150°**F**

***Also available with your branding or without branding**

Clear (-**CL**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches		Packaging
	d	d1	d	d1	Carton quantity
	Inside diameter	Inside diameter	Inside diameter	Inside diameter	
34136781	38.10	95.25	1.500	3.750	100
34187181	38.10	114.30	1.500	4.500	100
34240101	38.10	139.70	1.500	5.500	100
34311631	31.75	158.75	1.250	6.250	1000
34741941	38.10	177.80	1.500	7.000	100
34793921	57.15	228.60	2.250	9.000	100
34809501	73.15	292.10	2.880	11.500	50
34931581	92.20	368.30	3.630	14.500	50
34977031	111.25	444.50	4.380	17.500	50

Part Number	d	d1	d	d1	Carton quantity
	Inside diameter	Inside diameter	Inside diameter	Inside diameter	
	Dimensions in mm		Dimensions in inches		Packaging

9001
ISO certification

US-SH Series

Masking Miscellaneous

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

High Temperature Sheeting

The US-SH Series sheeting is designed to provide convenient and effective masking, lining and protection for large areas. Capable of die-cutting into shapes including gaskets, washers and seals, this flexible sheeting also withstands high temperatures, with no loss of integrity and functionality. Multiple and cost-effective reusability is possible.

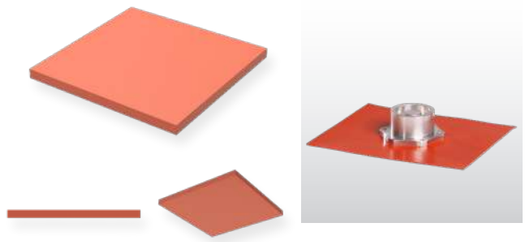

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Can be cut into custom shapes**

R. Red (-**RR**)
RAL 2010

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website:
www.caplugs.eu

Part Number	Dimensions in mm			Dimensions in imperial			
	T	L	W	T	T	L	W
	Thickness	Length	Width	Thickness as a fraction	Thickness as a decimal	Length	Width
34537716	0.79	914.00	914.00	1/32	0.031	36.000	36.000
34566306	1.57	914.00	914.00	1/16	0.062	36.000	36.000
34755636	2.36	914.00	914.00	3/32	0.093	36.000	36.000
34783216	3.18	914.00	914.00	1/8	0.125	36.000	36.000
34920456	4.75	914.00	914.00	3/16	0.187	36.000	36.000
34929596	6.35	914.00	914.00	1/4	0.250	36.000	36.000
34957496	9.53	914.00	914.00	3/8	0.375	36.000	36.000
34957856	12.70	914.00	914.00	1/2	0.500	36.000	36.000
Part Number	T	L	W	T	T	L	W
	Thickness	Length	Width	Thickness as a fraction	Thickness as a decimal	Length	Width
	Dimensions in mm			Dimensions in imperial			

9001
ISO certification

MDT-SH Series

Masking Miscellaneous

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Multi-Diameter Tubing Mask

The MDT-SH Series tubing is specially designed to protect plain and threaded studs, shafts, or other cylindrical parts, during industrial coating processes. Built-in flexibility enables fitting to a wide range of diameters and customising to specific lengths is available. Heat resistant to high temperatures, and the mask is reusable multiple times.

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Can be cut to custom lengths**

R. Red (-**RR**)
RAL 2010

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website:
www.caplugs.eu

Part Number	Dimensions in mm			Dimensions in imperial		
			L			L
	Fits Minimum diameter	Fits Maximum diameter	Length of coil in metres	Fits Minimum diameter	Fits Maximum diameter	Length of coil in feet
34220356	8.89	16.51	30	0.350	0.650	100
34970186	16.51	38.10	15	0.650	1.500	50
Part Number	0	0	L	0	0	L
	Fits Minimum diameter	Fits Maximum diameter	Length of coil in metres	Fits Minimum diameter	Fits Maximum diameter	Length of coil in feet
	Dimensions in mm			Dimensions in imperial		

9001
ISO certification

UC-SH Series

Masking Miscellaneous

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Flexible Cord

The UC-SH Series cord is designed to create gaskets, or O-ring-type masks, to protect grooves, slots, or keyways. Highly flexible, the cord fits many different component shapes, and can be cut to size for customisation. High temperature resistance maintains integrity and functionality during harsh processes and reusability adds cost-effectiveness.





Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Can be cut to custom lengths**

Clear (-**CL**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in imperial		
	D	L	D	D	L
	Outside diameter	Length of coil in metres	Outside diameter as a fraction	Outside diameter as a decimal	Length of coil in feet
34119215	1.78	30		0.070	100
34122605	2.36	30	3/32	0.093	100
34122855	2.62	30		0.103	100
34160025	3.18	30	1/8	0.125	100
34182425	3.53	30		0.139	100
34213615	3.96	30	5/32	0.156	100
34324805	4.75	30	3/16	0.187	100
34374045	5.33	30		0.210	100
34428405	6.35	30	1/4	0.250	100
34436415	6.99	30		0.275	100
34463895	7.92	30	5/16	0.312	100
34476455	9.53	15	3/8	0.375	50
34490835	11.10	15	7/16	0.437	50
34534175	12.70	15	1/2	0.500	50
34729285	14.27	15	9/16	0.562	50

Part Number	D	L	D	D	L
	Outside diameter	Length of coil in metres	Outside diameter as a fraction	Outside diameter as a decimal	Length of coil in feet
	Dimensions in mm		Dimensions in imperial		

9001
ISO certification

ST-SH Series

Masking Miscellaneous

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Flexible Tube

The ST-SH Series tubing protects plain and threaded studs or shafts for industrial masking applications. Built-in flexibility enables conformity to many cylindrical parts and customisation is available for tailoring to specific needs. Integrity is maintained during high temperature processes and the tubing can be reused, to enable waste reduction.



Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Can be cut to custom lengths**

R. Red (-**RR**)
RAL 2010

Clear (-**CL**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm			Dimensions in imperial		
		D	d	L	D	d	L
		Outside diameter	Inside diameter	Length of coil in metres	Outside diameter	Inside diameter	Length of coil in feet
34103395	Clear	4.19	1.02	30	0.165	0.040	100
34106135	Clear	4.75	1.57	30	0.187	0.062	100
34140885	Clear	5.21	2.03	30	0.205	0.080	100
34168675	Clear	5.54	2.36	30	0.218	0.093	100
34193745	Clear	5.94	2.77	30	0.234	0.109	100
34201275	Clear	6.35	3.18	30	0.250	0.125	100
34211005	Clear	6.73	3.56	30	0.265	0.140	100
34232535	Clear	7.14	3.96	30	0.281	0.156	100
34244825	Clear	7.54	4.37	30	0.297	0.172	100
34266445	Clear	7.92	4.75	30	0.312	0.187	100
34319775	Clear	8.33	5.16	30	0.328	0.203	100
34327525	Clear	8.71	5.54	30	0.343	0.218	100
34339165	Clear	9.12	5.94	30	0.359	0.234	100
34348005	Clear	9.53	6.35	30	0.375	0.250	100
34357485	Clear	10.31	7.14	30	0.406	0.281	100
34357655	Clear	11.10	7.92	30	0.437	0.312	100
34366955	Clear	11.89	8.71	30	0.468	0.343	100
34390295	Clear	12.70	9.53	30	0.500	0.375	100
34406215	Clear	13.49	10.31	30	0.531	0.406	100
34417015	Clear	14.27	11.10	30	0.562	0.437	100
34419285	Clear	15.88	12.70	30	0.625	0.500	100
34426315	Clear	19.05	15.88	15	0.750	0.625	50

9001
ISO certification

ST-SH Series

Masking Miscellaneous

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm			Dimensions in imperial		
		D	d	L	D	d	L
		Outside diameter	Inside diameter	Length of coil in metres	Outside diameter	Inside diameter	Length of coil in feet
34494085	Rusty Red	22.23	19.05	15	0.875	0.750	50
34532005	Rusty Red	25.40	22.23	15	1.000	0.875	50
34621695	Rusty Red	26.97	23.80	15	1.062	0.937	50
34623155	Rusty Red	28.58	25.40	15	1.125	1.000	50
34637475	Rusty Red	31.75	28.58	15	1.250	1.125	50
34641585	Rusty Red	34.93	31.75	15	1.375	1.250	50
34659125	Rusty Red	38.10	34.93	15	1.500	1.375	50
34670475	Rusty Red	41.28	38.10	15	1.625	1.500	50
34671985	Rusty Red	44.45	41.28	15	1.750	1.625	50
34672735	Rusty Red	47.63	44.45	15	1.875	1.750	50
34675095	Rusty Red	50.80	47.63	15	2.000	1.875	50
34715665	Rusty Red	53.98	50.80	15	2.125	2.000	50
Part Number	Colour	D	d	L	D	d	L
		Outside diameter	Inside diameter	Length of coil in metres	Outside diameter	Inside diameter	Length of coil in feet
		Dimensions in mm			Dimensions in imperial		



9001
ISO certification

UST-SH Series

Masking Miscellaneous

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Flexible Star-Shaped Tube

The UST-SH Series tubing has a unique star-shaped design to enable a secure fit and simpler removal. Masking plain and threaded studs or shafts, flexibility conforms to different cylindrical shapes, and cutting to specific dimensions is possible. Performing with integrity at high temperatures, the tubing is reusable for cost-effective efficiency.



Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Can be cut to custom lengths**



Green (-**GN**)
RAL 6032

R. Red (-**RR**)
RAL 2010

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm		Dimensions in imperial	
		d	L	d	L
		Inside diameter	Length of coil in metres	Inside diameter	Length of coil in feet
34815535	Rusty Red	12.70	30	0.500	100
34270125	Green	19.05	15	0.750	50
34503655	Green	25.40	15	1.000	50
34774805	Rusty Red	38.10	7	1.500	25
Part Number	Colour	d	L	d	L
		Inside diameter	Length of coil in metres	Inside diameter	Length of coil in feet
		Dimensions in mm		Dimensions in imperial	

9001
ISO certification

Masking Tapes

When Robust Protection and Clean Finish are Critical

Caplugs masking tapes reliably protect surfaces and sub-assemblies from seepage and bleeding of unwanted paint, spray, or coating applications.
Secure adhesion for clean sharp lines is matched by residue-free removal to maintain surface integrity and prevent reworking.

Robust resistance even to harsh chemicals ensures tape integrity and functionality in demanding conditions, maintaining consistent levels of precision and finish to satisfy stringent quality controls. Significantly reduced preparation and clean-up cycles minimise waste while reducing production timelines.

The inherent flexibility provided by different widths and adhesion strengths enables ease of application to flat and curved surface shapes and edge contours. This makes the tapes suitable for detailed work in automotive painting, electronics casing, and aerospace component finishing.

More details about these products on our website

SRT-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

High Temperature Wrapping Tape

The SRT-SH Series tape is, uniquely, designed to bond to itself as it is spiralled around and along the protected component. Self-adhering and self-fusing, the wrapping forms a very snug and secure fit for masking off tube ends and sections. Contoured for consistent, void-free application, the tape withstands high temperatures and can be reused.

Material: Ultrabake™ (VMQ)
Temperature Resistance: 315°**C** / 600°**F**

***Colour coded for size identification**

Also available in: White (-**WT**) RAL 9016

R. Red (-**RR**) RAL 2010

Yellow (-**YL**) RAL 1016

Blue (-**BL**) RAL 5002


Green (-**GN**) RAL 6032

Red (-**RD**) RAL 3024

Grey (-**GY**) RAL 9022

Black (-**BK**) RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm			Dimensions in inches		
		W	T	L	W	T	L
		Width	Thickness	Roll length in metres	Width	Thickness in Mil	Roll length in Feet
23107015	Rusty Red	19.05	0.25	11	0.750	10	36
23163625	Black	19.05	0.51	11	0.750	20	36
23229975	Blue	19.05	0.51	11	0.750	20	36
23259405	Grey	25.40	0.51	11	1.000	20	36
23322035	Rusty Red	25.40	0.76	11	1.000	30	36
23502025	Red	38.10	0.51	11	1.500	20	36
23554175	Blue	38.10	0.76	11	1.500	30	36
23616055	Green	44.45	0.51	11	1.750	20	36
23710745	Yellow	50.80	0.51	11	2.000	20	36
23770745	White	50.80	0.76	11	2.000	30	36
Part Number	**Colour**	**W**	**T**	**L**	**W**	**T**	**L**
		Width	**Thickness**	**Roll length in metres**	**Width**	**Thickness in Mil**	**Roll length in Feet**
		Dimensions in mm			**Dimensions in inches**		

9001
ISO certification

22-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

High Temperature Tape

The 22-SH Series tape is specially designed to withstand the demands of high-temperature industrial processes. The tape maintains integrity and functional effectiveness, to ensure consistently excellent thermal protection and isolation under challenging conditions. In addition, flame resistant properties provide reliable electrical insulation.

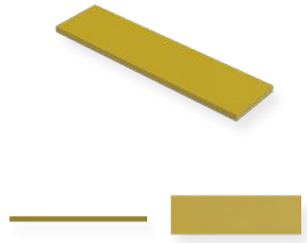



Material: Polyimide (PI)
Temperature Resistance: 260°**C** / 500°**F**

***This tape can also be supplied in pre-cut shapes**


Amber (-**AM**) RAL 1027

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	Rolls per case
23109275	3.18	33	0.125	1/8	36	36
23117375	6.35	33	0.250	1/4	36	162
23125785	5.00	33	0.197		36	36
23130735	9.53	33	0.375	3/8	36	108
23172065	10.00	33	0.393		36	24
23196765	12.70	33	0.500	1/2	36	72
23208595	15.00	33	0.591		36	18
23213705	15.88	33	0.625	5/8	36	81
23248095	19.05	33	0.750	3/4	36	54
23251145	20.00	33	0.787		36	12
23290965	25.00	33	0.984		36	12
23297245	25.40	33	1.000	1	36	36
23338045	30.00	33	1.181		36	12
23350115	31.75	33	1.250	1-1/4	36	6
23358925	38.10	33	1.500	1-1/2	36	27
23361165	40.00	33	1.575		36	6
23377445	45.00	33	1.772		36	6
23386185	50.00	33	1.969		36	6
23392065	50.80	33	2.000	2	36	27
23401525	63.50	33	2.500	2-1/2	36	4
23428445	76.20	33	3.000	3	36	4
23436805	80.00	33	3.150		36	4
Part Number	**Dimensions in mm**		**Dimensions in inches**			**Packaging**

9001
ISO certification

22-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	Rolls per case
23451785	100.00	33	3.937		36	4
23463995	101.60	36	4.000	4	36	4
23478015	150.00	33	5.906		36	2
23483215	152.40	33	6.000	6	36	9
Part Number	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
	Dimensions in mm		Dimensions in inches			Packaging



9001
ISO certification

PC11-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

High Temperature Tape

The PC11-SH Series tape provides masking protection, with durability and reliability, during high temperature processes. Retaining full integrity and effectiveness even under challenging conditions. The tape adhesive is designed to leave no residue on removal, maintaining protected surface quality, and cutting out cleaning or reworking operations.

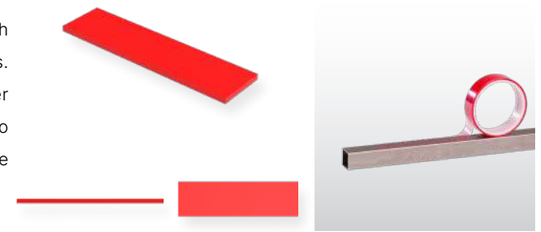

Material: Polyester (PET)
Temperature Resistance: 220°**C** / 425°**F**

***This tape can also be supplied in pre-cut shapes**

Red (-**RD**)
RAL 3024

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



9001
ISO certification

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	Rolls per case
23109945	3.18	66	0.125	1/8	72	144
23118545	6.35	66	0.250	1/4	72	144
23171825	5.00	66			72	144
23205205	7.92	66	0.312	5/16	72	96
23210455	9.53	66	0.375	3/8	72	96
23217785	10.00	66			72	96
23237405	11.10	66	0.437	7/16	72	72
23239255	12.70	66	0.500	1/2	72	72
23289905	14.27	66	0.562	9/16	72	48
23294075	15.00	66			72	72
23343245	15.88	66	0.625	5/8	72	48
23362295	19.05	66	0.750	3/4	72	54
23408165	20.00	66			72	48
23416405	22.23	66	0.875	7/8	72	36
23417405	23.80	66	0.937	15/16	72	36
23453275	25.00	66			72	48
23455205	25.40	66	1.000	1	72	36
23519265	30.00	66			72	36
23543055	31.75	66	1.250	1-1/4	72	24
23571735	35.00	66			72	24
23573855	38.10	66	1.500	1-1/2	72	24
23584425	40.00	66			72	24

PC11-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	Rolls per case
23586465	44.45	66	1.750	1-3/4	72	24
23601215	45.00	66			72	24
23616765	50.00	66			72	24
23702125	50.80	66	2.000	2	72	24
23712815	63.50	66	2.500	2-1/2	72	12
23749505	76.20	66	3.000	3	72	12
23772505	80.00	66			72	8
23781135	100.00	66			72	8
23805545	101.60	66	4.000	4	72	8
23820715	114.30	66	4.500	4-1/2	72	8
23874755	127.00	66	5.000	5	72	8
23900835	150.00	66			72	8
23927805	152.40	66	6.000	6	72	8
23943305	177.80	66	7.000	7	72	4
23947435	203.20	66	8.000	8	72	4
23962145	228.60	66	9.000	9	72	4

Part Number	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
	Dimensions in mm		Dimensions in inches			Packaging

9001
ISO certification

PC21-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

High Temperature Tape

The PC21-SH Series tape is designed for masking off component areas that do not require coating. The tape maintains consistent reliability at higher temperatures without losing integrity, making it suitable for precision masking processes. While adhesive quality is maintained, tape removal post-process is residue-free for efficiency.

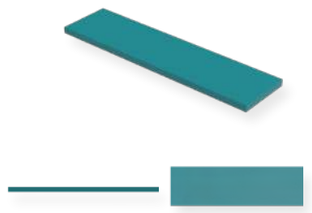

Material: Polyester (PET)
Temperature Resistance: 204°**C** / 400°**F**

***This tape can also be supplied in pre-cut shapes**



Green (-**GN**)
RAL 5021

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	Rolls per case
23125345	3.18	66	0.125	1/8	72	144
23128945	4.75	66	0.187	3/16	72	144
23166735	5.00	66	0.197		72	144
23171945	6.35	66	0.250	1/4	72	162
23179945	7.92	66	0.312	5/16	72	96
23186325	9.53	66	0.375	3/8	72	108
23198125	10.00	66	0.394		72	96
23266905	11.10	66	0.437	7/16	72	72
23267845	12.70	66	0.500	1/2	72	72
23279235	15.00	66	0.591		72	72
23299245	15.88	66	0.625	5/8	72	81
23314735	19.05	66	0.750	3/4	72	54
23344395	20.00	66	0.787		72	48
23359625	22.23	66	0.875	7/8	72	36
23399285	25.00	66	0.984		72	48
23423255	25.40	66	1.000	1	72	36
23449145	30.00	66	1.181		72	45
23462155	31.75	66	1.250	1-1/4	72	27
23470305	35.00	66	1.378		72	36
23485375	38.10	66	1.500	1-1/2	72	27
23485585	40.00	66	1.575		72	24
23487805	44.45	66	1.750	1-3/4	72	24

9001
ISO certification

PC21-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	Rolls per case
23528005	45.00	66	1.772	1-3/4	72	24
23562535	50.00	66	1.969		72	27
23563515	50.80	66	2.000	2	72	27
23575825	63.50	66	2.500	2-1/2	72	12
23577365	76.20	66	3.000	3	72	18
23579145	80.00	66	3.150		72	8
23605835	88.90	66	3.500	3-1/2	72	8
23620895	100.00	66	3.937		72	8
23644265	101.60	66	4.000	4	72	9
23649465	114.30	66	4.500	4-1/2	72	8
23653775	139.70	66	5.500	5-1/2	72	8
23656975	150.00	66	5.906		72	8
23669155	152.40	66	6.000	6	72	9
23675855	177.80	66	7.000	7	72	4
23696975	203.20	66	8.000	8	72	4
23741095	228.60	66	9.000	9	72	4
Part Number	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
	Dimensions in mm		Dimensions in inches			Packaging



9001
ISO certification

PC25-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Heavy Duty High Temperature Tape

The PC25-SH Series tape offers a heavy-duty variant on the capabilities of the PC21-SH. Increased thickness brings greater material stiffness, enabling easier handling and working on larger surfaces especially. Tearing is eliminated, while one-piece removal is clean and efficient. High temperature resistance and residue-free removal are built in.

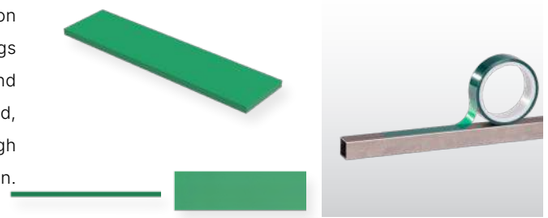

Material: Polyester (PET)
Temperature Resistance: 204°**C** / 400°**F**

***This tape can also be supplied in pre-cut shapes**



Green (-**GN**)
RAL 6032

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	Rolls per case
23251065	6.35	66	0.250	1/4	72	36
23260335	9.53	66	0.375	3/8	72	108
23352285	12.70	66	0.500	1/2	72	72
23423875	19.05	66	0.750	3/4	72	12
23490775	25.40	66	1.000	1	72	12
23508905	50.80	66	2.000	2	72	6
23559115	76.20	66	3.000	3	72	4
23734845	101.60	66	4.000	4	72	4
23754785	127.00	66	5.000	5	72	2
23792055	152.40	66	6.000	6	72	2
23834535	177.80	66	7.000	7	72	2
23838185	203.20	66	8.000	8	72	2
23872775	228.60	66	9.000	9	72	1
23934625	254.00	66	10.000	10	72	1
Part Number	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
	Dimensions in mm		Dimensions in inches			Packaging

9001
ISO certification

PC30-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

High Temperature Tape

The PC30-SH Series tape is a cost-effective alternative solution to the PC21-SH, for masking areas that do not require coating. Functionality includes reliable temperature resistance and the durability needed to withstand demanding industrial processes. Strong adhesive capability combines with no-residue removal for efficient high-quality finish.

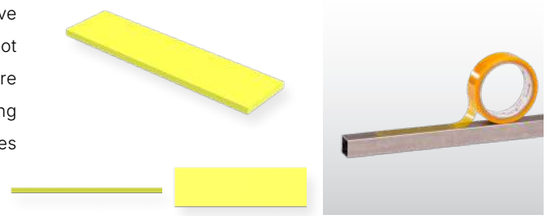

Material: Polyester (PET)
Temperature Resistance: 204°**C** / 400°**F**

***This tape can also be supplied in pre-cut shapes**



Yellow (-**YL**)
RAL 1016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
23114415	3.18	66	0.125	1/8	72	144
23126005	4.75	66	0.187	3/16	72	144
23147365	5.00	66	0.197		72	144
23172525	6.35	66	0.250	1/4	72	144
23195805	7.92	66	0.312	5/16	72	96
23198155	9.53	66	0.375	3/8	72	96
23201025	10.00	66	0.394		72	96
23203345	11.10	66	0.437	7/16	72	72
23207995	12.70	66	0.500	1/2	72	72
23222225	15.00	66	0.591		72	90
23232045	15.88	66	0.625	5/8	72	60
23232445	19.05	66	0.750	3/4	72	48
23232985	20.00	66	0.787		72	63
23245525	22.23	66	0.875	7/8	72	36
23253275	25.00	66	0.984		72	36
23256245	25.40	66	1.000	1	72	36
23263605	30.00	66	1.181		72	32
23282475	31.75	66	1.250	1-1/4	72	36
23284595	35.00	66	1.378		72	24
23291625	38.10	66	1.500	1-1/2	72	8
23294185	40.00	66	1.575		72	24
23299595	44.45	66	1.750	1-3/4	72	24



9001
ISO certification

PC30-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
23325275	45.00	66	1.772		72	24
23340255	50.00	66	1.969		72	12
23343735	50.80	66	2.000	2	72	27
23374105	55.00	66	2.165		72	12
23375865	63.50	66	2.500	2-1/2	72	12
23394105	76.20	66	3.000	3	72	18
23409115	80.00	66	3.150		72	8
23434155	88.90	66	3.500	3-1/2	72	8
23451095	100.00	66	3.937		72	12
23460135	101.60	66	4.000	4	72	12
23474845	114.30	66	4.500	4-1/2	72	8
23478125	127.00	66	5.000	5	72	8
23499565	139.70	66	5.500	5-1/2	72	8
23516965	150.00	66	5.906		72	8
23527185	152.40	66	6.000	6	72	8
23538505	177.80	66	7.000	7	72	4
23561225	203.20	66	8.000	8	72	4
23562595	228.60	66	9.000	9	72	4

Part Number	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
	Dimensions in mm		Dimensions in inches			Packaging



9001
ISO certification

PC90-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Thinner Profile High Temperature Tape

The PC90-SH Series tape has a thin flexible design to provide reliable masking protection for curved surfaces and intricate profiles. High temperature resistance ensures effectiveness in moderate heat process environments, without losing integrity or performance. Excellent adhesion is matched by no-residue removal for consistent quality finishing.

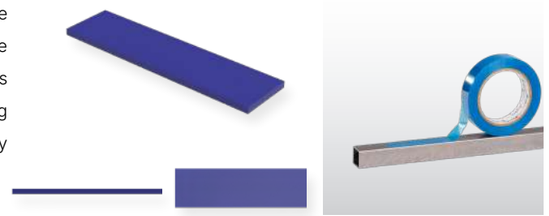

Material: Polyester (PET)
Temperature Resistance: 204°**C** / 400°**F**

***This tape can also be supplied in pre-cut shapes**

Blue (-**BL**)
RAL 5002

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
23110365	3.18	66	0.125	1/8	72	144
23137865	4.75	66	0.187	3/16	72	144
23191295	5.00	66	0.197		72	144
23196105	6.35	66	0.250	1/4	72	162
23211965	7.92	66	0.312	29/93	72	96
23217955	9.53	66	0.375	3/8	72	108
23279555	10.00	66	0.394		72	135
23290855	11.10	66	0.437	38/87	72	72
23302485	12.70	66	0.500	1/2	72	72
23309955	15.00	66	0.591		72	72
23321575	15.88	66	0.625	5/8	72	48
23332365	19.05	66	0.750	3/4	72	48
23364325	20.00	66	0.787		72	48
23369725	22.23	66	0.875	7/8	72	36
23395055	25.00	66	0.984		72	48
23399145	25.40	66	1.000	1	72	36
23420135	30.00	66	1.181		72	36
23422305	31.75	66	1.250	1-1/4	72	36
23436395	35.00	66	1.378		72	24
23444125	38.10	66	1.500	1-1/2	72	27
23467055	40.00	66	1.575		72	24
23480935	44.45	66	1.750	1-3/4	72	24

9001
ISO certification

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

PC90-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
23501465	45.00	66	1.772		72	24
23511015	50.00	66	1.969		72	27
23539965	50.80	66	2.000	2	72	27
23587175	63.50	66	2.500	2-1/2	72	12
23611925	76.20	66	3.000	3	72	18
23631305	80.00	66	3.150		72	8
23677155	88.90	66	3.500	3-1/2	72	8
23686975	100.00	66	3.937		72	8
23705505	101.60	66	4.000	4	72	9
23722145	127.00	66	5.000	5	72	8
23722455	139.70	66	5.500	5-1/2	72	8
23735225	150.00	66	5.906		72	8
23740655	152.40	66	6.000	6	72	9
23755445	177.80	66	7.000	7	72	4
23872855	203.20	66	8.000	8	72	4
23878875	228.60	66	9.000	9	72	4

Part Number	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
	Dimensions in mm		Dimensions in inches			Packaging



9001
ISO certification

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

PC198-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Glass Cloth High Temperature Tape

The PC198-SH Series tape provides reliable, highly conformable surface protection against high temperature processes, abrasion and chemical damage. The tape is also flame retardant and offers additional safety in environments where there is a risk of fire. Excellent tensile strength ensures materials are held together securely, even under stress.

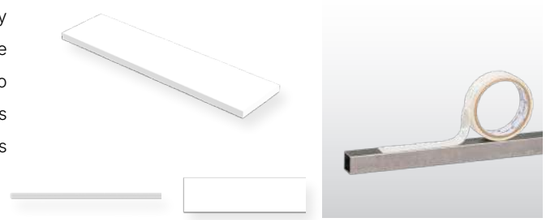

Material: Fibreglass (FRP)
Temperature Resistance: 260°**C** / 500°**F**

***This tape can also be supplied in pre-cut shapes**

White (-**WT**)
RAL 9016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
23183485	3.18	33	0.125	1/8	36	18
23189165	6.35	33	0.250	1/4	36	36
23199045	5.00	33	0.197		36	144
23223175	9.53	33	0.375	3/8	36	24
23227265	10.00	33	0.394		36	96
23232255	12.70	33	0.500	1/2	36	72
23265755	15.00	33	0.591		36	72
23307075	15.88	33	0.625	5/8	36	12
23328835	19.05	33	0.750	3/4	36	12
23356875	20.00	33	0.787		36	48
23438915	25.00	33	0.984		36	48
23475845	25.40	33	1.000	1	36	36
23493375	30.00	33	1.181		36	36
23509425	31.75	33	1.250	1-1/4	36	12
23547875	38.10	33	1.500	1-1/4	36	27
23548425	40.00	33	1.575		36	24
23587495	45.00	33	1.772		36	24
23592565	50.00	33	1.969		36	12
23616325	50.80	33	2.000	2	36	27
23643465	63.50	33	2.500	2-1/2	36	4
23710555	76.20	33	3.000	3	36	4
23818765	80.00	33	3.150		36	8

9001
ISO certification

PC198-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
23825515	100.00	33	3.937		36	8
23918545	101.60	33	4.000	4	36	4
23933895	150.00	33	5.906		36	8
23960915	152.40	33	6.000	6	36	2
Part Number	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
	Dimensions in mm		Dimensions in inches			Packaging



9001
ISO certification

KD11-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

High Temperature Tape

The KD11-SH Series pressure-sensitive tape's backing provides strength and good conformability to curved or irregular surfaces. Designed to resist paint flaking and ensure clean well-defined masking lines, the tape is particularly suitable for wet strip applications and can also be stripped hot. Residue-free removal protects surface cleanliness.

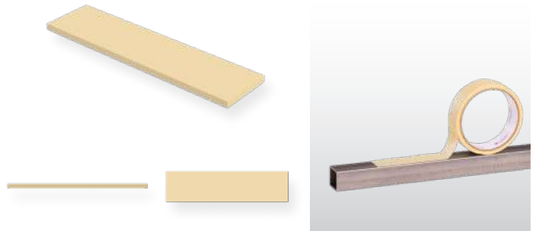

Material: Crepe Paper (CPR) with Rubber Adhesive (RA)
Temperature Resistance: 149°**C** / 300°**F**

***This tape can also be supplied in pre-cut shapes**

Cream (-**CM**)
RAL 9001

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	Rolls per case
23128795	3.18	55	0.125	1/8	60	144
23131825	6.35	55	0.250	1/4	60	144
23142555	5.00	55	0.197		60	144
23200575	9.53	55	0.375	3/8	60	96
23250585	10.00	55	0.394		60	96
23264565	12.70	55	0.500	1/2	60	72
23341255	15.00	55	0.591		60	72
23382275	15.88	55	0.625	5/8	60	48
23393015	19.05	55	0.750	3/4	60	48
23423055	20.00	55	0.787		60	48
23439825	25.00	55	0.984		60	48
23459165	25.40	55	1.000	1	60	36
23477225	30.00	55	1.181		60	36
23534865	31.75	55	1.250	1-1/4	60	24
23561685	38.10	55	1.500	1-1/2	60	24
23601165	40.00	55	1.575		60	24
23626705	45.00	55	1.772		60	24
23635095	50.00	55	1.969		60	24
23659355	50.80	55	2.000	2	60	24
23714145	63.50	55	2.500	2-1/2	60	12
23824645	76.20	55	3.000	3	60	16
23825765	80.00	55	3.150		60	8

9001
ISO certification

KD11-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	Rolls per case
23857225	100.00	55	3.937		60	8
23863475	101.60	55	4.000	4	60	12
23904905	150.00	55	5.906		60	8
23939625	152.40	55	6.000	6	60	8
Part Number	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
	Dimensions in mm		Dimensions in inches			Packaging



9001
ISO certification

NAY Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Self-Adhering Tape

The NAY self-adhering tape is designed when overlapped to form a secure bond without traditional adhesives. Self-adhesion enables rapid application or adjustment where speed is critical. Pinhole-free for a consistent and reliable seal, even at higher temperatures, the tape's tensile strength and flexibility withstand significant stress break-free.

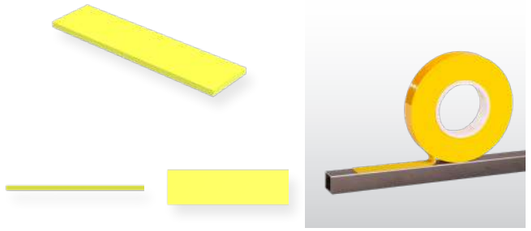

Material: Poly Vinyl Chloride (PVC)
Temperature Resistance: 100°**C** / 212°**F**

***Can be used in type II and type III anodising, milling and hard chrome plating**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	Rolls per case
23258105	12.70	151	0.500	1/2	165	60
23348245	19.05	151	0.750	3/4	165	52
23478005	25.40	151	1.000	1	165	40
23786755	38.10	151	1.500	1-1/2	165	28
23790375	50.80	151	2.000	2	165	20
Part Number	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
	Dimensions in mm		Dimensions in inches			Packaging

9001
ISO certification

SC1-100 Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Stop-Off Tape

The SC1-100 Series tape is a specialised masking solution, maintaining precise edge definition under variant temperature industrial processes. A secure bond to protected component surfaces withstands heat yet is residue-free on removal to prevent defects and eliminate rework. Built-in, durable flexibility conforms closely, even to complex contours.

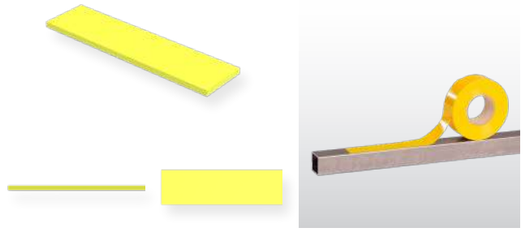

Material: Poly Vinyl Chloride (PVC)
Temperature Resistance: 99°**C** / 210°**F**

***Can be used in anodising, milling, etching and peening processes**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	Rolls per case
23122635	12,70	20	0,500	1/2	22	Call Customer Service
23471605	19,05	20	0,750	3/4	22	Call Customer Service
23507155	25,40	20	1,000	1	22	Call Customer Service
23518685	38,10	20	1,500	1-1/2	22	Call Customer Service
23959685	50,80	20	2,000	2	22	Call Customer Service
Part Number	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
	Dimensions in mm		Dimensions in inches			Packaging

9001
ISO certification

232-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

High-Performance Tape

The 232-SH Series high-performance masking tape is designed for instant adhesion and resilience against lifting or curling. Very flexible, the tape adapts to corners and irregular surfaces, while protecting from overspray and delivering clean lines. Easy-to-tear, with no residue, one-piece removal without slivering maintains paint surface quality.

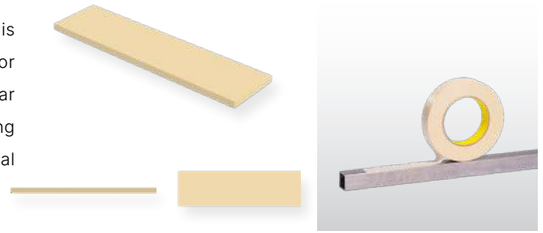

Material: Crepe Paper (CPR) with Rubber Adhesive (RA)
Temperature Resistance: 121°**C** / 250°**F**

***This tape can also be supplied in pre-cut shapes**

Cream (-**CM**)
RAL 9001

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	Rolls per case
23204295	3.18	55	0.125	1/8	60	288
23237495	4.75	55	0.187	3/16	60	Call Customer Service
23376505	6.00	55	0.236		60	144
23378745	12.00	55	0.472		60	72
23441205	18.00	55	0.709		60	48
23455055	24.00	55	0.945		60	36
23510145	36.00	55	1.417		60	24
23572375	48.00	55	1.890		60	24
23592895	63.50	55	2.500	2-1/2	60	12
23600575	76.20	55	3.000	3	60	12
23634955	127.00	55	5.000	5	60	8
23639215	139.70	55	5.500	5-1/2	60	8
23845985	152.40	55	6.000	6	60	8

Part Number	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
	Dimensions in mm		Dimensions in inches			Packaging

9001
ISO certification

425-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Reflective Surface Tape

The 425-SH Series tape is purpose designed to shield sensitive components by resisting weathering, UV damage, or moisture. The highly reflective surface protects from heat and light to deliver enhanced thermal insulation. Robust adhesive qualities prevent unwanted peeling and lifting, conforming strongly and seamlessly, even to irregular surfaces.

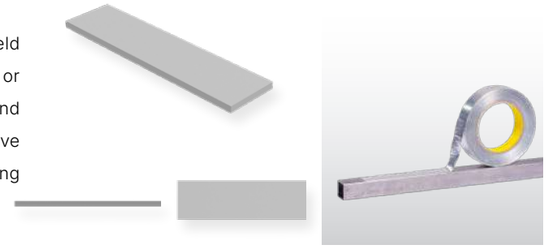

Material: Aluminium (AL)
Temperature Resistance: 150°**C** / 302°**F**

***This tape can also be supplied in pre-cut shapes**

Aluminum (-**AL**)
RAL 9006

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	Rolls per case
23146225	3.18	55	0.125	1/8	60	72
23162135	6.35	55	0.250	1/4	60	48
23177585	9.53	55	0.375	3/8	60	72
23244995	12.70	55	0.500	1/2	60	72
23266135	19.05	55	0.750	3/4	60	48
23304165	25.40	55	1.000	1	60	36
23373685	31.75	55	1.250	1-1/4	60	24
23404855	38.10	55	1.500	1-1/2	60	24
23556705	50.80	55	2.000	2	60	24
23583715	76.20	55	3.000	3	60	12
23589445	101.60	55	4.000	4	60	2
23610905	125.00	55	4.921		60	2
23742065	152.40	55	6.000	6	60	2

Part Number	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
	Dimensions in mm		Dimensions in inches			Packaging

9001
ISO certification

470-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

High-Resistance Tape

The 470-SH Series tape provides exceptional resistance to chemicals, including solvents, as well as heat, friction and moisture. Built-in conformable backing readily adapts to curved and irregular surfaces for secure application. The tape's durability withstands wear in very rugged working conditions, while adhesion is firm at higher temperatures.

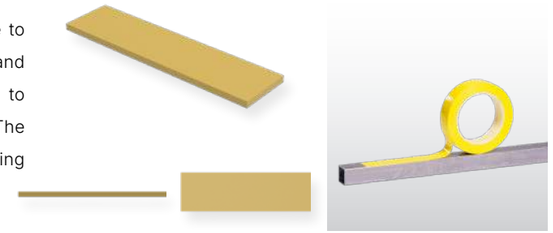

Material: Poly Vinyl Chloride (PVC) with Rubber Adhesive (RA)
Temperature Resistance: 121°**C** / 250°**F**

***Can be used in anodising, milling, etching and peening processes**

Beige (-**BG**)
RAL 1024

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	Rolls per case
23121825	3.18	33	0.125	1/8	36	144
23428485	6.35	33	0.250	1/4	36	144
23951275	9.53	33	0.375	3/8	36	72
23442645	11.10	33	0.437	7/16	36	72
23641345	12.70	33	0.500	1/2	36	72
23547085	15.88	33	0.625	5/8	36	48
23840505	19.05	33	0.750	3/4	36	48
23418545	25.40	33	1.000	1	36	36
23949585	38.10	33	1.500	1-1/2	36	24
23807105	50.80	33	2.000	2	36	24
23185855	63.50	33	2.500	2-1/2	36	12
23792195	76.20	33	3.000	3	36	12
23913605	88.90	33	3.500	3-1/2	36	8
23273035	101.60	33	4.000	4	36	8
23582415	152.40	33	6.000	6	36	8
Part Number	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
	Dimensions in mm		Dimensions in inches			Packaging

9001
ISO certification

471-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Colour-Coded Tape

The 471-SH Series colour-coded tape provides highly visible floor marking and surface protection. Durable construction resists abrasion and solvents, while built-in elasticity conforms to uneven surfaces and irregular shapes. Tape colour retains brightness in harsh conditions and easy removal reduces clean-up.

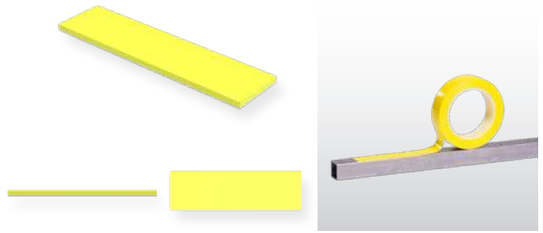

Material: Poly Vinyl Chloride (PVC) with Rubber Adhesive (RA)
Temperature Resistance: 76°**C** / 170°**F**

***This tape can also be supplied in pre-cut shapes**

Yellow (-**YL**)
RAL 1016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	Rolls per case
23158745	3.18	33	0.125	1/8	36	144
23174675	4.75	33	0.187	3/16	36	144
23390155	6.35	33	0.250	1/4	36	144
23396705	7.92	33	0.312	5/16	36	144
23423225	9.53	33	0.375	3/8	36	96
23429725	12.70	33	0.500	1/2	36	72
23484255	19.05	33	0.750	3/4	36	48
23560115	25.40	33	1.000	1	36	36
23606645	38.10	33	1.500	1-1/2	36	24
23674765	50.80	33	2.000	2	36	24
23695695	76.20	33	3.000	3	36	12
23736395	152.40	33	6.000	6	36	8
Part Number	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
	Dimensions in mm		Dimensions in inches			Packaging

9001
ISO certification

TOL Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Same-Width Liner Tape

The TOL Series tape is laminated directly onto a same-width liner for precision application and clean lines. Lamination offers robust protection of the tape surface from contaminants until usage. Strong and durable adhesive qualities ensure excellent performance while maintaining clear delineation for a reliable finish and enhanced aesthetic appeal.

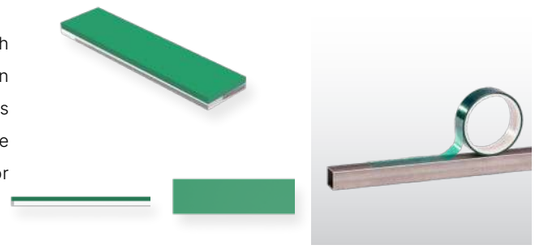

Material: Refer to product table
Temperature Resistance: Refer to product table

***A number of different materials are available**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Material	Maximum temperature		Dimensions in mm			Packaging
			Degrees C	Degrees F	W Width	T Tape thickness	L Roll length in metres	Rolls per case
23111655	Tan	Vinyl	121	250	25.40	0.18	33	6
23112015	Tan	Vinyl	121	250	152.40	0.18	33	4
23119385	Tan	Vinyl	121	250	203.20	0.18	33	3
23122505	Tan	Vinyl	121	250	304.80	0.18	33	2
23129985	Tan	Vinyl	121	250	381.00	0.18	33	2
23160015	Tan	Vinyl	121	250	457.20	0.18	33	2
23178115	Tan	Vinyl	121	250	609.60	0.18	33	2
23181195	Tan	Vinyl	121	250	762.00	0.18	33	2
23187605	Yellow	Vinyl	77	170	25.40	0.13	33	6
23189075	Yellow	Vinyl	77	170	152.40	0.13	33	4
23205175	Yellow	Vinyl	77	170	203.20	0.13	33	3
23209365	Yellow	Vinyl	77	170	304.80	0.13	33	2
23214275	Yellow	Vinyl	77	170	381.00	0.13	33	2
23219415	Yellow	Vinyl	77	170	457.20	0.13	33	2
23236295	Yellow	Vinyl	77	170	609.60	0.13	33	2
23236515	Yellow	Vinyl	77	170	762.00	0.13	33	2
23613095	Cream	Paper	149	300	25.40	0.19	55	6
23272395	Cream	Paper	149	300	152.40	0.19	55	4
23286385	Cream	Paper	149	300	203.20	0.19	55	3
23300625	Cream	Paper	149	300	304.80	0.19	55	2
23312555	Cream	Paper	149	300	381.00	0.19	55	2
23319905	Cream	Paper	149	300	457.20	0.19	55	2

9001
ISO certification

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

TOL Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Material	Maximum temperature		Dimensions in inches				Packaging
			Degrees C	Degrees F	W Width as a decimal	W Width as a fraction	T Tape thickness in Mil	L Roll length in yards	Rolls per case
23111655	Tan	Vinyl	121	250	1.000	1	7.1	36	6
23112015	Tan	Vinyl	121	250	6.000	6	7.1	36	4
23119385	Tan	Vinyl	121	250	8.000	8	7.1	36	3
23122505	Tan	Vinyl	121	250	12.000	12	7.1	36	2
23129985	Tan	Vinyl	121	250	15.000	15	7.1	36	2
23160015	Tan	Vinyl	121	250	18.000	18	7.1	36	2
23178115	Tan	Vinyl	121	250	24.000	24	7.1	36	2
23181195	Tan	Vinyl	121	250	30.000	30	7.1	36	2
23187605	Yellow	Vinyl	77	170	1.000	1	5.2	36	6
23189075	Yellow	Vinyl	77	170	6.000	6	5.2	36	4
23205175	Yellow	Vinyl	77	170	8.000	8	5.2	36	3
23209365	Yellow	Vinyl	77	170	12.000	12	5.2	36	2
23214275	Yellow	Vinyl	77	170	15.000	15	5.2	36	2
23219415	Yellow	Vinyl	77	170	18.000	18	5.2	36	2
23236295	Yellow	Vinyl	77	170	24.000	24	5.2	36	2
23236515	Yellow	Vinyl	77	170	30.000	30	5.2	36	2
23613095	Cream	Paper	149	300	1.000	1	7.3	60	6
23272395	Cream	Paper	149	300	6.000	6	7.3	60	4
23286385	Cream	Paper	149	300	8.000	8	7.3	60	3
23300625	Cream	Paper	149	300	12.000	12	7.3	60	2
23312555	Cream	Paper	149	300	15.000	15	7.3	60	2
23319905	Cream	Paper	149	300	18.000	18	7.3	60	2





9001
ISO certification

Our engineering experts are ready to help you with fully customised solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

TOL Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Material	Maximum temperature		Dimensions in mm			Packaging
			Degrees C	Degrees F	W	T	L	Rolls per case
					Width	Tape thickness	Roll length in metres	
23324765	Cream	Paper	149	300	609.60	0.19	55	2
23343645	Cream	Paper	149	300	762.00	0.19	55	2
23343965	Red	Polyester	220	425	25.40	0.09	66	6
23345775	Red	Polyester	220	425	152.40	0.09	66	4
23362605	Red	Polyester	220	425	203.20	0.09	66	3
23378195	Red	Polyester	220	425	304.80	0.09	66	2
23381175	Red	Polyester	220	425	381.00	0.09	66	2
23411805	Red	Polyester	220	425	457.20	0.09	66	2
23442285	Red	Polyester	220	425	609.60	0.09	66	2
23446375	Red	Polyester	220	425	762.00	0.09	66	2
23468465	Green	Polyester	204	400	25.40	0.09	66	6
23480385	Green	Polyester	204	400	152.40	0.09	66	4
23483535	Green	Polyester	204	400	203.20	0.09	66	3
23485525	Green	Polyester	204	400	304.80	0.09	66	2
23502905	Green	Polyester	204	400	381.00	0.09	66	2
23503825	Green	Polyester	204	400	457.20	0.09	66	2
23509465	Green	Polyester	204	400	609.60	0.09	66	2
23512465	Green	Polyester	204	400	762.00	0.09	66	2
23520385	Green	Polyester	204	400	25.40	0.17	66	6
23554795	Green	Polyester	204	400	152.40	0.17	66	4
23568275	Green	Polyester	204	400	203.20	0.17	66	3
23582405	Green	Polyester	204	400	304.80	0.17	66	2
23600175	Green	Polyester	204	400	381.00	0.17	66	2
23602715	Green	Polyester	204	400	457.20	0.17	66	2
23611295	Green	Polyester	204	400	609.60	0.17	66	2
23636035	Green	Polyester	204	400	762.00	0.17	66	2
23640255	Blue	Polyester	204	400	25.40	0.07	66	6
23664385	Blue	Polyester	204	400	152.40	0.07	66	4
23696585	Blue	Polyester	204	400	203.20	0.07	66	3
23726105	Blue	Polyester	204	400	304.80	0.07	66	2
23727785	Blue	Polyester	204	400	381.00	0.07	66	2
23745095	Blue	Polyester	204	400	457.20	0.07	66	2
23750185	Blue	Polyester	204	400	609.60	0.07	66	2
23754745	Blue	Polyester	204	400	762.00	0.07	66	2



9001
ISO certification

Part Number	Colour	Material	Maximum temperature		Dimensions in mm			Packaging
			Degrees C	Degrees F	W	T	L	Rolls per case
					Width	Tape thickness	Roll length in metres	

TOL Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Material	Maximum temperature		Dimensions in inches				Packaging
			Degrees C	Degrees F	W	W	T	L	Rolls per case
					Width as a decimal	Width as a fraction	Tape thickness in Mil	Roll length in yards	
23324765	Cream	Paper	149	300	24,000	24	7,3	60	2
23343645	Cream	Paper	149	300	30,000	30	7,3	60	2
23343965	Red	Polyester	220	425	1,000	1	3,5	72	6
23345775	Red	Polyester	220	425	6,000	6	3,5	72	4
23362605	Red	Polyester	220	425	8,000	8	3,5	72	3
23378195	Red	Polyester	220	425	12,000	12	3,5	72	2
23381175	Red	Polyester	220	425	15,000	15	3,5	72	2
23411805	Red	Polyester	220	425	18,000	18	3,5	72	2
23442285	Red	Polyester	220	425	24,000	24	3,5	72	2
23446375	Red	Polyester	220	425	30,000	30	3,5	72	2
23468465	Green	Polyester	204	400	1,000	1	3,5	72	6
23480385	Green	Polyester	204	400	6,000	6	3,5	72	4
23483535	Green	Polyester	204	400	8,000	8	3,5	72	3
23485525	Green	Polyester	204	400	12,000	12	3,5	72	2
23502905	Green	Polyester	204	400	15,000	15	3,5	72	2
23503825	Green	Polyester	204	400	18,000	18	3,5	72	2
23509465	Green	Polyester	204	400	24,000	24	3,5	72	2
23512465	Green	Polyester	204	400	30,000	30	3,5	72	2
23520385	Green	Polyester	204	400	1,000	1	6,5	72	6
23554795	Green	Polyester	204	400	6,000	6	6,5	72	4
23568275	Green	Polyester	204	400	8,000	8	6,5	72	3
23582405	Green	Polyester	204	400	12,000	12	6,5	72	2
23600175	Green	Polyester	204	400	15,000	15	6,5	72	2
23602715	Green	Polyester	204	400	18,000	18	6,5	72	2
23611295	Green	Polyester	204	400	24,000	24	6,5	72	2
23636035	Green	Polyester	204	400	30,000	30	6,5	72	2
23640255	Blue	Polyester	204	400	1,000	1	2,8	72	6
23664385	Blue	Polyester	204	400	6,000	6	2,8	72	4
23696585	Blue	Polyester	204	400	8,000	8	2,8	72	3
23726105	Blue	Polyester	204	400	12,000	12	2,8	72	2
23727785	Blue	Polyester	204	400	15,000	15	2,8	72	2
23745095	Blue	Polyester	204	400	18,000	18	2,8	72	2
23750185	Blue	Polyester	204	400	24,000	24	2,8	72	2
23754745	Blue	Polyester	204	400	30,000	30	2,8	72	2



9001
ISO certification

Part Number	Colour	Material	Maximum temperature		Dimensions in inches				Packaging
			Degrees C	Degrees F	W	W	T	L	Rolls per case
					Width as a decimal	Width as a fraction	Tape thickness in Mil	Roll length in yards	

TOEL-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Extended On-Liner Tape

The TOEL-SH Series tape incorporates an innovative extended liner. Wider than the tape, the liner is easy to handle, eliminating the need to find and peel the edge and making application and removal much easier. The liner edges are tack-free, to prevent unwanted sticking to components or debris. Strong adhesion is without residue for a clean finish.

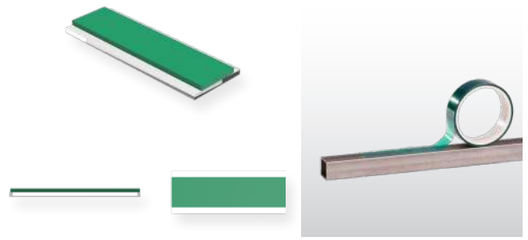

Material: Refer to product table
Temperature Resistance: Refer to product table

***A number of different materials are available**



Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Material	Maximum temperature		Dimensions in mm				Packaging
					W	W1	T	L	
			Degrees C	Degrees F	Width	Liner width	Tape thickness	Roll length in metres	Rolls per case
23119915	Tan	Vinyl	121	250	25.40	50.80	0.18	33	6
23122325	Tan	Vinyl	121	250	152.40	177.80	0.18	33	4
23130515	Tan	Vinyl	121	250	203.20	228.60	0.18	33	3
23145005	Tan	Vinyl	121	250	304.80	355.60	0.18	33	2
23156355	Tan	Vinyl	121	250	381.00	431.80	0.18	33	2
23179895	Tan	Vinyl	121	250	457.20	508.00	0.18	33	2
23192495	Tan	Vinyl	121	250	609.60	660.40	0.18	33	2
23194575	Tan	Vinyl	121	250	762.00	812.80	0.18	33	2
23208205	Yellow	Vinyl	77	170	25.40	50.80	0.13	33	6
23245355	Yellow	Vinyl	77	170	152.40	177.80	0.13	33	4
23250985	Yellow	Vinyl	77	170	203.20	228.60	0.13	33	3
23252105	Yellow	Vinyl	77	170	304.80	355.60	0.13	33	2
23252155	Yellow	Vinyl	77	170	381.00	431.80	0.13	33	2
23255995	Yellow	Vinyl	77	170	457.20	508.00	0.13	33	2
23256395	Yellow	Vinyl	77	170	609.60	660.40	0.13	33	2
23258685	Yellow	Vinyl	77	170	762.00	812.80	0.13	33	2
23271845	Cream	Paper	149	300	25.40	50.80	0.19	55	6
23275645	Cream	Paper	149	300	152.40	177.80	0.19	55	4
23278155	Cream	Paper	149	300	203.20	228.60	0.19	55	3
23283105	Cream	Paper	149	300	304.80	355.60	0.19	55	2
23291005	Cream	Paper	149	300	381.00	431.80	0.19	55	2
23309415	Cream	Paper	149	300	457.20	508.00	0.19	55	2



9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

TOEL-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Material	Maximum temperature		Dimensions in inches				Packaging
					W	W1	T	L	
			Degrees C	Degrees F	Width as a decimal	Liner width	Tape thickness in Mil	Roll length in yards	Rolls per case
23119915	Tan	Vinyl	121	250	1.000	2	7.1	36	6
23122325	Tan	Vinyl	121	250	6.000	7	7.1	36	4
23130515	Tan	Vinyl	121	250	8.000	9	7.1	36	3
23145005	Tan	Vinyl	121	250	12.000	14	7.1	36	2
23156355	Tan	Vinyl	121	250	15.000	17	7.1	36	2
23179895	Tan	Vinyl	121	250	18.000	20	7.1	36	2
23192495	Tan	Vinyl	121	250	24.000	26	7.1	36	2
23194575	Tan	Vinyl	121	250	30.000	32	7.1	36	2
23208205	Yellow	Vinyl	77	170	1.000	2	5.2	36	6
23245355	Yellow	Vinyl	77	170	6.000	7	5.2	36	4
23250985	Yellow	Vinyl	77	170	8.000	9	5.2	36	3
23252105	Yellow	Vinyl	77	170	12.000	14	5.2	36	2
23252155	Yellow	Vinyl	77	170	15.000	17	5.2	36	2
23255995	Yellow	Vinyl	77	170	18.000	20	5.2	36	2
23256395	Yellow	Vinyl	77	170	24.000	26	5.2	36	2
23258685	Yellow	Vinyl	77	170	30.000	32	5.2	36	2
23271845	Cream	Paper	149	300	1.000	2	7.3	60	6
23275645	Cream	Paper	149	300	6.000	7	7.3	60	4
23278155	Cream	Paper	149	300	8.000	9	7.3	60	3
23283105	Cream	Paper	149	300	12.000	14	7.3	60	2
23291005	Cream	Paper	149	300	15.000	17	7.3	60	2
23309415	Cream	Paper	149	300	18.000	20	7.3	60	2





9001
ISO certification

caplugs

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

TOEL-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Material	Maximum temperature		Dimensions in mm				Packaging
			Degrees C	Degrees F	W	W1	T	L	Rolls per case
					Width	Liner width	Tape thickness	Roll length in metres	
23328645	Cream	Paper	149	300	609.60	660.40	0.19	55	2
23329395	Cream	Paper	149	300	762.00	812.80	0.19	55	2
23335285	Red	Polyester	220	425	25.40	50.80	0.09	66	6
23338095	Red	Polyester	220	425	152.40	177.80	0.09	66	4
23359115	Red	Polyester	220	425	203.20	228.60	0.09	66	3
23362655	Red	Polyester	220	425	304.80	355.60	0.09	66	2
23368455	Red	Polyester	220	425	381.00	431.80	0.09	66	2
23371125	Red	Polyester	220	425	457.20	508.00	0.09	66	2
23374885	Red	Polyester	220	425	609.60	660.40	0.09	66	2
23380485	Red	Polyester	220	425	762.00	812.80	0.09	66	2
23380965	Green	Polyester	204	400	25.40	50.80	0.09	66	6
23393525	Green	Polyester	204	400	152.40	177.80	0.09	66	4
23410405	Green	Polyester	204	400	203.20	228.60	0.09	66	3
23418775	Green	Polyester	204	400	304.80	355.60	0.09	66	2
23435455	Green	Polyester	204	400	381.00	431.80	0.09	66	2
23443415	Green	Polyester	204	400	457.20	508.00	0.09	66	2
23451595	Green	Polyester	204	400	609.60	660.40	0.09	66	2
23458645	Green	Polyester	204	400	762.00	812.80	0.09	66	2
23474515	Green	Polyester	204	400	25.40	50.80	0.17	66	6
23478165	Green	Polyester	204	400	152.40	177.80	0.17	66	4
23478735	Green	Polyester	204	400	203.20	228.60	0.17	66	3
23479345	Green	Polyester	204	400	304.80	355.60	0.17	66	2
23505345	Green	Polyester	204	400	381.00	431.80	0.17	66	2
23506205	Green	Polyester	204	400	457.20	508.00	0.17	66	2
23506345	Green	Polyester	204	400	609.60	660.40	0.17	66	2
23525115	Green	Polyester	204	400	762.00	812.80	0.17	66	2
23535595	Blue	Polyester	204	400	25.40	50.80	0.07	66	6
23551075	Blue	Polyester	204	400	152.40	177.80	0.07	66	4
23558845	Blue	Polyester	204	400	203.20	228.60	0.07	66	3
23560745	Blue	Polyester	204	400	304.80	355.60	0.07	66	2
23567135	Blue	Polyester	204	400	381.00	431.80	0.07	66	2
23588945	Blue	Polyester	204	400	457.20	508.00	0.07	66	2
23610435	Blue	Polyester	204	400	609.60	660.40	0.07	66	2
23623725	Blue	Polyester	204	400	762.00	812.80	0.07	66	2





9001
ISO certification

Part Number | Colour | Material | Degrees C | Degrees F | W (Width) | W1 (Liner width) | T (Tape thickness) | L (Roll length in metres) | Rolls per case
Maximum temperature | Dimensions in mm | Packaging

Visit **www.caplugs.eu** for full product information and build your order with precision and confidence.

TOEL-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Material	Maximum temperature		Dimensions in inches				Packaging
			Degrees C	Degrees F	W	W1	T	L	Rolls per case
					Width as a decimal	Liner width	Tape thickness in Mil	Roll length in yards	
23328645	Cream	Paper	149	300	24.000	26	7.3	60	2
23329395	Cream	Paper	149	300	30.000	32	7.3	60	2
23335285	Red	Polyester	220	425	1.000	2	3.5	72	6
23338095	Red	Polyester	220	425	6.000	7	3.5	72	4
23359115	Red	Polyester	220	425	8.000	9	3.5	72	3
23362655	Red	Polyester	220	425	12.000	14	3.5	72	2
23368455	Red	Polyester	220	425	15.000	17	3.5	72	2
23371125	Red	Polyester	220	425	18.000	20	3.5	72	2
23374885	Red	Polyester	220	425	24.000	26	3.5	72	2
23380485	Red	Polyester	220	425	30.000	32	3.5	72	2
23380965	Green	Polyester	204	400	1.000	2	3.5	72	6
23393525	Green	Polyester	204	400	6.000	7	3.5	72	4
23410405	Green	Polyester	204	400	8.000	9	3.5	72	3
23418775	Green	Polyester	204	400	12.000	14	3.5	72	2
23435455	Green	Polyester	204	400	15.000	17	3.5	72	2
23443415	Green	Polyester	204	400	18.000	20	3.5	72	2
23451595	Green	Polyester	204	400	24.000	26	3.5	72	2
23458645	Green	Polyester	204	400	30.000	32	3.5	72	2
23474515	Green	Polyester	204	400	1.000	2	6.5	72	6
23478165	Green	Polyester	204	400	6.000	7	6.5	72	4
23478735	Green	Polyester	204	400	8.000	9	6.5	72	3
23479345	Green	Polyester	204	400	12.000	14	6.5	72	2
23505345	Green	Polyester	204	400	15.000	17	6.5	72	2
23506205	Green	Polyester	204	400	18.000	20	6.5	72	2
23506345	Green	Polyester	204	400	24.000	26	6.5	72	2
23525115	Green	Polyester	204	400	30.000	32	6.5	72	2
23535595	Blue	Polyester	204	400	1.000	2	2.8	72	6
23551075	Blue	Polyester	204	400	6.000	7	2.8	72	4
23558845	Blue	Polyester	204	400	8.000	9	2.8	72	3
23560745	Blue	Polyester	204	400	12.000	14	2.8	72	2
23567135	Blue	Polyester	204	400	15.000	17	2.8	72	2
23588945	Blue	Polyester	204	400	18.000	20	2.8	72	2
23610435	Blue	Polyester	204	400	24.000	26	2.8	72	2
23623725	Blue	Polyester	204	400	30.000	32	2.8	72	2





9001
ISO certification

Part Number | Colour | Material | Degrees C | Degrees F | W (Width as a decimal) | W1 (Liner width) | T (Tape thickness in Mil) | L (Roll length in yards) | Rolls per case
Maximum temperature | Dimensions in inches | Packaging

Our engineering experts are ready to help you with fully customised solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

BT100-SH Series

Masking Tapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Blasting Tape

The BT100-SH Series blasting tape resists the ingress of small blast media particles or other debris into protected surfaces or components. Crack-resistant flexibility enables close conformity to irregular or curved surfaces while removal is residue-free for a clean finish. Convenient handling and application are matched by strong instant adhesion.

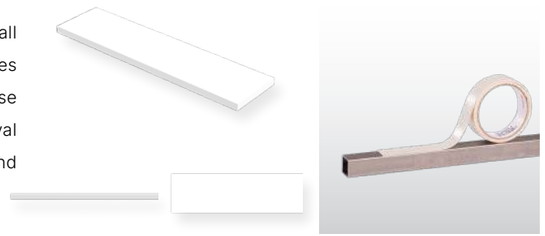

Material: Rubber (NR)

***This tape can also be supplied in pre-cut shapes**

White (-**WT**)
RAL 9016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in inches			Packaging
	W	L	W	W	L	
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	Rolls per case
23138185	25.40	9	1.000	1	10	36
23237645	50.80	9	2.000	2	10	24
23265555	76.20	9	3.000	3	10	12
23355365	101.60	9	4.000	4	10	8
Part Number	W	L	W	W	L	Rolls per case
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards	
	Dimensions in mm		Dimensions in inches			Packaging

9001
ISO certification

Custom Die-Cutting Capabilities & Die-Cut Assembly Kits

Custom Die-Cutting Capabilities

Extremely effective when masking a flat surface, custom die-cuts are quick and easy to apply and remove, and they can even be fitted with pull tabs to expedite the removal process. This solution is ideal for wet paint, powder coating, e-coating and plating operations. Custom die-cuts are also an economical way to eliminate tedious manual masking steps, saving significant labour costs.

Die-Cut Assembly Kits

Inline masking often requires the user to mask several different areas of a component. To streamline this process, we can create multiple different die-cut shapes within one kit sheet. Each kit contains exactly the parts required for one masking cycle. No more, no less. By providing operators with a complete set for each unit or batch, the risk of incomplete masking is drastically reduced. Every hole, edge, thread, or surface that requires protection is covered by a dedicated, correctly sized masking element.

Our team is ready to support you throughout the entire process.
Get in touch with our product experts to schedule an appointment.

Tapes
Selector Guide

Series Name	Description	Anodising	Blasting	E-Coating	Powder Coating	Plating	Wet Paint	Die Cuts available from this tape	Page Number
SRT-SH	Designed to bond to itself as it is spiralled around and along the protected component.	x	x	x	x	x	x		404
22-SH	Used for PCB solder and conformal coating masking.	x				x		Yes	405
PC11-SH	A powder coating tape with a higher than standard temperature rating. Good for components that retain heat.	x		x	x	x		Yes	407
PC21-SH	Polyester tape with high tear resistance and temperature resistance. This tape is used by powder coaters throughout the world.	x		x	x	x		Yes	409
PC25-SH	This tape offers a heavy-duty variant on the capabilities of the PC21-SH. Increased thickness brings greater material stiffness, enabling easier handling and working on larger surfaces.	x		x	x			Yes	411
PC30-SH	A cost-effective alternative solution to the PC21-SH, for masking areas that do not require coating.	x		x	x			Yes	412
PC90-SH	A polyester tape which has a thin flexible design to provide reliable masking protection for curved surfaces and intricate profiles.	x		x	x	x		Yes	414
PC198-SH	Provides reliable, highly conformable surface protection against high temperature processes, abrasion and chemical damage.		x		x			Yes	416
KD11-SH	Designed to resist paint flaking and ensure clean well-defined masking lines, the tape is particularly suitable for wet strip applications and can also be stripped hot.						x	Yes	418
NAY	The NAY self-adhering tape is designed when overlapped to form a secure bond without traditional adhesives.					x			420
SC1-100	SC1-100 Series tape is a specialised masking solution, maintaining precise edge definition under variant temperature industrial processes.	x				x			421
232-SH	Very flexible, the tape adapts to corners and irregular surfaces, while protecting from overspray and delivering clean lines.						x	Yes	422
425-SH	425-SH Series tape is purpose designed to shield sensitive components by resisting weathering, UV damage, or moisture.					x		Yes	423
470-SH	The 470-SH Series tape provides exceptional resistance to chemicals, including solvents, as well as heat, friction and moisture.					x		Yes	424
471-SH	The 471-SH Series colour-coded tape provides surface protection in a choice of vivid, standout colours. It can also be used for floor marking.					x		Yes	425
BT100-SH	BT100-SH Series blasting tape resists the ingress of small blast media particles or other debris into protected surfaces or components.		x						434
Safe-Fire Tape	Designed to bond to itself as it is spiralled around and along the protected component.	x	x	x	x	x			553

Series Name	Description	Anodising	Blasting	E-Coating	Powder Coating	Plating	Wet Paint	Die Cuts available from this tape	Page Number

Series Name	Material	Colour	Maximum Temperature	Adhesive	Aerospace Approved	Die Cuts available from this tape	Page Number
SRT-SH	Silicone	Various	315°C (600°F)	None			404
22-SH	Polyimide	Amber	260°C (500°F)	Silicone		Yes	405
PC11-SH	Polyester	Red	220°C (425°F)	Silicone		Yes	407
PC21-SH	Polyester	Green	204°C (400°F)	Silicone	Yes	Yes	409
PC25-SH	Polyester	Green	204°C (400°F)	Silicone		Yes	411
PC30-SH	Polyester	Yellow	204°C (400°F)	Silicone		Yes	412
PC90-SH	Polyester	Blue	204°C (400°F)	Silicone	Yes	Yes	414
PC198-SH	Glass Cloth	Cream	260°C (500°F)	Silicone		Yes	416
KD11-SH	Crepe Paper	Cream	149°C (300°F)	Rubber	Yes	Yes	418
NAY	Vinyl	Yellow	100°C (212°F)	None			420
SC1-100	Vinyl	Yellow	99°C (210°F)	Rubber			421
232-SH	Crepe Paper	Beige	121°C (250°F)	Rubber	Yes	Yes	422
425-SH	Aluminium	Silver	150°C (302°F)	Acrylic		Yes	423
470-SH	Vinyl	Cream	121°C (250°F)	Rubber	Yes	Yes	424
471-SH	Vinyl	Various	76°C (170°F)	Rubber	Yes	Yes	425
BT100-SH	Rubber	Cream	163°C (325°F)	Acrylic			434
Safe-Fire Tape	Silicone	Red	260°C (500°F)	None			553

Series Name	Material	Colour	Maximum Temperature	Adhesive	Aerospace Approved	Die Cuts available from this tape	Page Number

Find Your Tape
Masking Tapes

1 Choose your **process**

2 Choose max application **temperature**

3 Confirm **details** on the product page

4 Order easily and quickly at **+31 73 643 02 88** or **sales.eu@caplugs.com**

Series Name	Process							Available tape formats		Avalable shape formats				Product details					Page Number
	Anodising	Blasting	E-Coating	Powder Coating	Plating	Wet Paint	Maximum Temperature	Standard Widths	Custom Widths	Discs	Squares	Rectangles	Custom Shapes	Aerospace Approved	Material	Adhesive	Colour	Series Name	
SRT-SH	x	x	x	x	x	x	315°C (600°F)	x							Silicone	None	Various	SRT-SH	404
22-SH	x				x		260°C (500°F)	x	x	x	x	x	x		Polyimide	Silicone	Amber	22-SH	405
PC11-SH	x		x	x	x		220°C (425°F)	x	x	x	x	x	x		Polyester	Silicone	Red	PC11-SH	407
PC21-SH	x		x	x	x		204°C (400°F)	x	x	x	x	x	x	Yes	Polyester	Silicone	Green	PC21-SH	409
PC25-SH	x		x	x			204°C (400°F)	x	x	x	x	x	x		Polyester	Silicone	Green	PC25-SH	411
PC30-SH	x		x	x			204°C (400°F)	x	x	x	x	x	x		Polyester	Silicone	Yellow	PC30-SH	412
PC90-SH	x		x	x	x		204°C (400°F)	x	x	x	x	x	x	Yes	Polyester	Silicone	Blue	PC90-SH	414
PC198-SH		x		x			260°C (500°F)	x	x	x	x	x	x		Glass Cloth	Silicone	Cream	PC198-SH	416
KD11-SH						x	149°C (300°F)	x	x	x	x	x	x	Yes	Crepe Paper	Rubber	Cream	KD11-SH	418
NAY					x		100°C (212°F)	x							Vinyl	None	Yellow	NAY	420
SC1-100	x				x		99°C (210°F)	x							Vinyl	Rubber	Yellow	SC1-100	421
232-SH						x	121°C (250°F)	x	x	x	x	x	x	Yes	Crepe Paper	Rubber	Beige	232-SH	422
425-SH					x		150°C (302°F)	x		x					Aluminium	Acrylic	Silver	425-SH	423
470-SH					x		121°C (250°F)	x	x	x	x	x	x	Yes	Vinyl	Rubber	Cream	470-SH	424
471-SH					x		76°C (170°F)	x	x	x	x	x	x	Yes	Vinyl	Rubber	Various	471-SH	425
BT100-SH		x					163°C (325°F)	x							Rubber	Acrylic	Cream	BT100-SH	434
Safe-Fire Tape	x	x	x	x	x		260°C (500°F)	x							Silicone	None	Red	Safe-Fire Tape	553
Series Name	Anodising	Blasting	E-Coating	Powder Coating	Plating	Wet Paint	Maximum Temperature	Standard Widths	Custom Widths	Discs	Squares	Rectangles	Custom Shapes	Aerospace Approved	Material	Adhesive	Colour	Series Name	Page Number
	Process							Available tape formats		Avalable shape formats				Product details					

Masking Discs and Shapes

When Protection of Non-standard Profiles is Critical

Caplugs masking discs and shapes provide precision protection in situations where an alternative to standard tapes or covers is required. Cut into pre-formed shapes and sizes, these solutions are tailored to cover irregular contours and intricate areas efficiently during surface treatment processes.

Robust resistance to high temperatures and chemical interactions provides effective shielding during processes involving curing or baking. And residue-free adhesive can be removed cleanly without surface damage, to maintain cleanliness and finish quality while eliminating rework.

Built-in precision enables the perfect fit demanded by industries where detail and accuracy impact product quality. Electronics manufacturing, automotive detailing and aerospace engineering use these solutions to protect from overspray and ensure only designated surface areas are treated.

More details about these products on our website

AD-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Anodising Disc

The AD-SH Series anodising disc is designed for hard or soft anodising. Highly conformable to different surfaces, the disc is abrasion resistant and protects against chemicals to maintain effective masking. Clean and residue-free removal ensures surface quality with no additional cleaning while temperature range usage capability means no degrading.

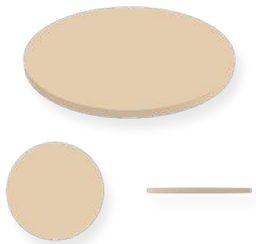

Material: Poly Vinyl Chloride (PVC)
Temperature Resistance: 77°**C** / 170°**F**

***Also available in a tape format**

Tan (-**TN**)
RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24102015	3.18	1/8	0.125	5000
24109645	4.00		0.157	5000
24119735	4.75	3/16	0.187	5000
24146325	5.00		0.197	5000
24150865	6.00		0.236	5000
24153735	6.35	1/4	0.250	5000
24154695	7.00		0.276	5000
24158815	7.92	5/16	0.312	5000
24165225	8.00		0.315	5000
24177085	9.53	3/8	0.375	5000
24192725	10.00		0.394	5000
24229335	11.10	7/16	0.437	5000
24254925	12.00		0.472	5000
24279145	12.70	1/2	0.500	5000
24279605	13.00		0.512	5000
24303705	14.00		0.551	5000
24305505	14.27	9/16	0.562	5000
24341905	15.00		0.591	5000
24342385	15.88	5/8	0.625	5000
24418445	17.00		0.669	2000
24434725	17.45	11/16	0.687	4000
24436025	19.05	3/4	0.750	4000

9001
ISO certification

AD-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24449245	20.00		0.787	2000
24452215	20.62	13/16	0.812	4000
24458715	21.00		0.827	2000
24490915	22.23	7/8	0.875	2000
24496455	23.80	15/16	0.937	2000
24516635	25.40	1	1.000	2000
24528385	26.97	1-1/16	1.062	2000
24544415	28.58	1-1/8	1.125	2000
24568115	30.15	1-3/16	1.187	2000
24585925	31.75	1-1/4	1.250	2000
24587965	33.32	1-5/16	1.312	2000
24620665	34.93	1-3/8	1.375	2000
24628265	36.50	1-7/16	1.437	2000
24631615	38.10	1-1/2	1.500	2000
24633785	39.67	1-9/16	1.562	2000
24666375	40.00		1.575	500
24667235	41.28	1-5/8	1.625	1000
24690925	42.85	1-11/16	1.687	1000
24697345	44.45	1-3/4	1.750	1000
24705505	46.02	1-13/16	1.812	1000
24721585	47.63	1-7/8	1.875	1000
24735685	49.20	1-15/16	1.937	1000
24736015	50.80	2	2.000	500

Part Number	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging



9001
ISO certification

PC-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Powder Peel Disc

The PC-SH Series of die-cuts offers a choice of masking shapes for precise component surface application and robust protection from coating media and processes. High temperature resistance maintains integrity without loss of functionality and removal is residue-free for clean working. An optional quick removal tab enhances operational convenience.

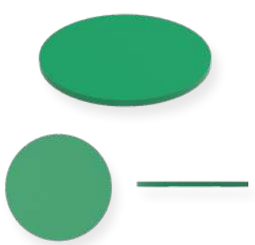

Material: Polyester (PET)
Temperature Resistance: 204°**C** / 400°**F**

***Also available in a tape format**

Green (-**GN**)
RAL 6032

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24102075	3.00		0.118	2000
24102815	3.18	1/8	0.125	2000
24102995	4.00		0.157	2000
24104595	4.75	3/16	0.187	2000
24106055	5.00		0.197	2000
24107825	6.00		0.236	2000
24110275	6.35	1/4	0.250	2000
24110635	7.00		0.276	2000
24114395	7.92	5/16	0.312	2000
24114675	8.00		0.315	2000
24114695	9.53	3/8	0.375	2000
24123585	10.00		0.394	2000
24124405	11.00		0.433	2000
24126735	11.10	7/16	0.437	2000
24132005	12.00		0.472	2000
24135745	12.70	1/2	0.500	2000
24151515	13.00		0.512	2000
24157975	14.00		0.551	2000
24160485	14.27	9/16	0.562	2000
24167595	15.00		0.591	2000
24175785	15.88	5/8	0.625	2000
24181945	16.00		0.630	2000

9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

PC-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24182125	17.00		0.670	1000
24183995	17.45	11/16	0.687	1000
24184475	19.00		0.748	1000
24185475	19.05	3/4	0.750	1000
24190725	20.00		0.787	1000
24203215	20.62	13/16	0.812	1000
24205385	21.00		0.827	1000
24207565	22.00		0.866	500
24208355	22.23	7/8	0.875	500
24210945	23.00		0.906	500
24211835	23.80	15/16	0.937	500
24212645	25.00		0.984	500
24215425	25.40	1	1.000	500
24215585	26.97	1-1/16	1.062	500
24217945	28.00		1.102	500
24220415	28.58	1-1/8	1.125	500
24220585	30.00		1.181	500
24230425	30.15	1-3/16	1.187	500
24230985	31.75	1-1/4	1.250	500
24233855	33.32	1-5/16	1.312	500
24236465	34.93	1-3/8	1.375	500
24243825	35.00		1.378	250
24245945	36.50	1-7/16	1.437	500
24247005	38.10	1-1/2	1.500	500
24255155	39.67	1-9/16	1.562	500
24258015	40.00		1.575	250
24264345	41.28	1-5/8	1.625	250
24265065	42.85	1-11/16	1.687	250
24265785	44.45	1-3/4	1.750	250
24265955	45.00		1.772	250
24267915	46.02	1-13/16	1.812	250
24279575	47.63	1-7/8	1.875	250
24281505	49.20	1-15/16	1.937	250
24282785	50.00		1.969	250
24287525	50.80	2	2.000	100
24291505	55.00		2.165	250
24293335	57.15	2-1/4	2.250	100



9001
ISO certification

caplugs

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

PC-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24295565	60.00		2.362	250
24296375	63.50	2-1/2	2.500	100
24297875	65.00		2.559	250
24298845	69.85	2-3/4	2.750	100
24301085	70.00		2.756	250
24305045	75.00		2.953	100
24310185	76.20	3	3.000	100
24314135	80.00		3.150	100
24334165	82.55	3-1/4	3.250	100
24348055	85.00		3.346	100
24352955	88.90	3-1/2	3.500	100
24362595	90.00		3.543	100
24363885	95.00		3.740	100
24372005	95.25	3-3/4	3.750	100
24384045	100.00		3.937	100
24391355	101.60	4	4.000	100
24392435	107.95	4-1/4	4.250	100
24395925	114.30	4-1/2	4.500	100
24403305	120.00		4.724	100
24410415	120.65	4-3/4	4.750	100
24411225	127.00	5	5.000	100
24423935	130.00		5.118	100
24430115	133.35	5-1/4	5.250	100
24431555	139.70	5-1/2	5.500	100
24432265	146.05	5-3/4	5.750	100
24436065	150.00		5.906	100
24439825	152.40	6	6.000	100
Part Number	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging

9001
ISO certification

PR-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Powder Peel Disc

The PR-SH Series disc is designed to reliably withstand high-temperature processes, while retaining integrity for precise finishing. Balancing strength with flexibility, the disc adheres securely during heating, without leaving surface residues after removal. Convenient packaging, on a core-wound liner, ensures ready availability for application.

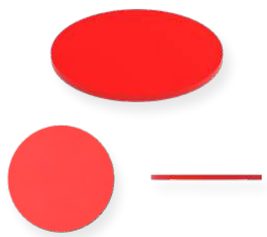

Material: Polyester (PET)
Temperature Resistance: 220°**C** / 425°**F**

***Also available in a tape format**

Red (-**RD**)
RAL 3024

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24106315	3.18	1/8	0.125	2000
24108825	4.75	3/16	0.187	2000
24114685	6.35	1/4	0.250	2000
24114855	7.92	5/16	0.312	2000
24132595	9.53	3/8	0.375	2000
24170725	11.10	7/16	0.437	2000
24179435	12.70	1/2	0.500	5000
24180185	14.27	9/16	0.562	2000
24187225	15.88	5/8	0.625	2000
24203545	17.45	11/16	0.687	1000
24221995	19.05	3/4	0.750	1000
24224545	20.62	13/16	0.812	1000
24245565	22.23	7/8	0.875	500
24254745	23.80	15/16	0.937	500
24283525	25.40	1	1.000	500
24287725	26.97	1-16	1.062	500
24314115	28.58	1-1/8	1.125	500
24321305	30.15	1-3/16	1.187	500
24336885	31.75	1-1/4	1.250	500
24338375	33.32	1-5/16	1.312	500
24343525	34.93	1-3/8	1.375	500
24368415	36.50	1-7/16	1.437	500

9001
ISO certification

PR-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24373545	38.10	1-1/2	1.500	500
24374755	39.67	1-9/16	1.562	500
24406385	41.28	1-5/8	1.625	250
24410025	42.85	1-11/16	1.687	250
24411325	44.45	1-3/4	1.750	250
24458465	46.02	1-13/16	1.812	250
24468715	47.63	1-7/8	1.875	250
24469255	49.20	1-15/16	1.937	250
24494135	50.80	2	2.000	100
24508635	57.15	2-1/4	2.250	100
24531055	63.50	2-1/2	2.500	100
24537525	69.85	2-3/4	2.750	100
24540335	76.20	3	3.000	100
24545165	82.55	3-1/4	3.250	100
24566915	88.90	3-1/2	3.500	100
24579065	95.25	3-3/4	3.750	100
24579855	101.60	4	4.000	100
24583615	107.95	4-1/4	4.250	100
24586575	114.30	4-1/2	4.500	100
24599925	120.65	4-3/4	4.750	100
24605505	127.00	5	5.000	100
24606385	133.35	5-1/4	5.250	100
24627885	139.70	5-1/2	5.500	100
24643395	146.05	5-3/4	5.750	100
24674115	152.40	6	6.000	100

Part Number	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging

9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information and build your order with precision and confidence.

PB-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Powder Peel Disc

The PB-SH Series disc's thin design profile and flexibility are highly suitable for use on varied contours, including curved or other complex surface geometries. Integrity is maintained throughout high temperature processes, together with secure adhesive properties, for consistent effectiveness. Lack of residues on removal ensures surface quality.

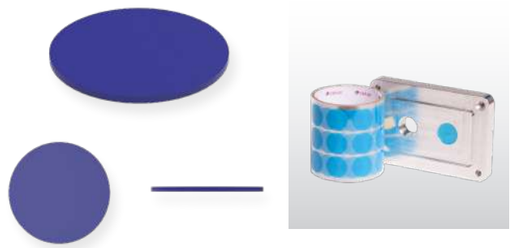

Material: Polyester (PET)
Temperature Resistance: 204°**C** / 400°**F**

***Also available in a tape format**

Blue (-**BL**)
RAL 5002

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24100915	3.18	1/8	0.125	2000
24102175	4.75	3/16	0.187	2000
24105485	5.00		0.197	2000
24123795	6.00		0.236	2000
24126335	6.35	1/4	0.250	2000
24132735	7.00		0.276	2000
24133385	7.92	5/16	0.312	2000
24146335	8.00		0.315	2000
24164445	9.00		0.354	2000
24187005	9.53	3/8	0.375	2000
24198535	10.00		0.394	2000
24207455	11.00		0.433	2000
24217615	11.10	7/16	0.437	2000
24219885	12.00		0.472	2000
24253445	12.70	1/2	0.500	2000
24259475	13.00		0.512	2000
24269225	14.00		0.551	2000
24281365	14.27	9/16	0.562	2000
24290105	15.00		0.591	2000
24300495	15.88	5/8	0.625	2000
24310705	16.00		0.630	2000
24321185	17.00		0.669	1000

9001
ISO certification

caplugs

Our engineering experts are ready to help you with fully customised solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

PB-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24393885	17.45	11/16	0.687	1000
24417305	18.00		0.709	1000
24423475	19.00		0.748	1000
24462805	19.05	3/4	0.750	1000
24480125	20.00		0.787	1000
24482735	20.62	13/16	0.812	1000
24492805	21.00		0.827	1000
24499375	22.00		0.866	500
24520125	22.23	7/8	0.875	500
24529825	23.00		0.906	500
24551765	23.80	15/16	0.937	500
24558515	24.00		0.945	500
24563255	25.40	1	1.000	500
24565285	26.97	1-1/16	1.062	500
24568805	28.58	1-1/8	1.125	500
24577405	30.15	1-3/16	1.187	500
24595655	31.75	1-1/4	1.250	500
24596185	33.32	1-5/16	1.312	500
24596605	34.93	1-3/8	1.375	500
24600125	36.50	1-7/16	1.437	500
24606865	38.10	1-1/2	1.500	500
24609875	39.67	1-9/16	1.562	500
24616695	41.28	1-5/8	1.625	250
24619795	42.85	1-11/16	1.687	250
24627875	44.45	1-3/4	1.750	250
24627915	46.02	1-13/16	1.812	250
24636055	47.63	1-7/8	1.875	250
24640305	49.20	1-15/16	1.937	250
24655815	50.80	2	2.000	100
24656005	57.15	2-1/4	2.250	100
24666695	63.50	2-1/2	2.500	100
24690185	69.85	2-3/4	2.750	100
24707245	76.20	3	3.000	100
24711085	82.55	3-1/4	3.250	100
24723215	88.90	3-1/2	3.500	100
24745365	95.25	3-3/4	3.750	100
24753465	101.60	4	4.000	100



9001
ISO certification

PB-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24770415	107.95	4-1/4	4.250	100
24775045	114.30	4-1/2	4.500	100
24780635	120.65	4-3/4	4.750	100
24788845	127.00	5	5.000	100
24799685	133.35	5-1/4	5.250	100
24809495	139.70	5-1/2	5.500	100
24822105	146.05	5-3/4	5.750	100
24834675	152.40	6	6.000	100
Part Number	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging



9001
ISO certification

KP-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

High Temperature Processes Disc

The KP-SH Series disc is constructed to withstand high temperatures, while thermally protecting sensitive components to maintain their functional integrity. Protection includes flame-resistant electrical insulation, where the disc delivers consistent performance. Reliable operational properties extend across demanding industrial operations.

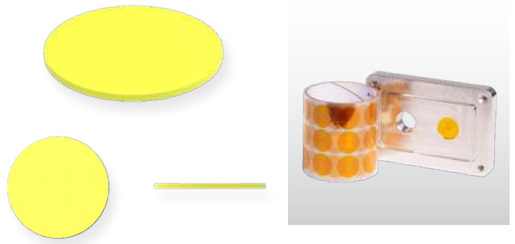

Material: Polyimide (PI)
Temperature Resistance: 260°**C** / 500°**F**

***Also available in a tape format**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24101125	3.00		0.118	2000
24101955	3.18	1/8	0.125	2000
24104455	4.00		0.157	2000
24200705	4.75	3/16	0.187	2000
24209595	5.00		0.197	2000
24216085	6.00		0.236	2000
24217065	6.35	1/4	0.250	2000
24240095	7.00		0.276	2000
24243735	7.92	5/16	0.312	2000
24276535	8.00		0.315	2000
24277115	9.53	3/8	0.375	2000
24289455	10.00		0.394	2000
24370985	11.10	7/16	0.437	2000
24388595	12.00		0.472	2000
24427045	12.70	1/2	0.500	2000
24430365	14.27	9/16	0.562	2000
24436045	15.88	5/8	0.625	2000
24472965	17.45	11/16	0.687	1000
24477585	19.05	3/4	0.750	1000
24488945	20.00		0.787	1000
24506775	20.62	13/16	0.812	1000
24510505	22.23	7/8	0.875	500

9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

KP-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24511385	23.80	15/16	0.937	500
24514035	25.40	1	1.000	500
24530275	26.97	1-1/16	1.062	500
24537295	28.58	1-1/8	1.125	500
24537955	30.00		1.181	500
24538945	30.15	1-3/16	1.187	500
24546935	31.75	1-1/4	1.250	500
24548665	33.32	1-5/16	1.312	500
24549175	34.93	1-3/8	1.375	500
24577225	36.50	1-7/16	1.437	500
24581505	38.10	1-1/2	1.500	500
24582495	39.67	1-9/16	1.562	500
24595365	41.28	1-5/8	1.625	250
24653385	42.85	1-11/16	1.687	250
24653585	44.45	1-3/4	1.750	250
24658795	46.02	1-13/16	1.812	250
24661705	47.63	1-7/8	1.875	250
24676055	49.20	1-15/16	1.937	250
24684265	50.80	2	2.000	100
24689175	57.15	2-1/4	2.250	100
24692955	63.50	2-1/2	2.500	100
24697745	69.85	2-3/4	2.750	100
24711455	76.20	3	3.000	100
24725835	82.55	3-1/4	3.250	100
24736725	88.90	3-1/2	3.500	100
24737935	95.25	3-3/4	3.750	100
24741855	101.60	4	4.000	100
24759415	107.95	4-1/4	4.250	100
24764575	114.30	4-1/2	4.500	100
24766975	120.65	4-3/4	4.750	100
24787005	127.00	5	5.000	100
24789985	133.35	5-1/4	5.250	100
24794835	139.70	5-1/2	5.500	100
24797275	146.05	5-3/4	5.750	100
24833765	152.40	6	6.000	100

Part Number	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging



9001
ISO certification

GC-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Glass Cloth Disc

The GC-SH Series glass cloth disc withstands harsh conditions such as high temperature processes. High-tensile construction ensures integrity and effectiveness are maintained, along with excellent bonding and splicing of low internal strength materials. Abrasion and chemical resistance are robust, while flame retarding capability increases safety.

Material: Fibreglass (FRP)
Temperature Resistance: 260°**C** / 500°**F**

***Also available in a tape format**

White (-**WT**)
RAL 9016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24141285	3.18	1/8	0.125	2000
24164715	4.75	3/16	0.187	2000
24168925	6.35	1/4	0.250	2000
24186385	7.92	5/16	0.312	2000
24197225	9.53	3/8	0.375	2000
24217345	11.10	7/16	0.437	2000
24265635	12.70	1/2	0.500	2000
24299865	14.27	9/16	0.562	2000
24361645	15.88	5/8	0.625	2000
24365315	17.45	11/16	0.687	1000
24370825	19.05	3/4	0.750	1000
24392895	20.62	13/16	0.812	1000
24405225	22.23	7/8	0.875	500
24408195	23.80	15/16	0.937	500
24441445	25.40	1	1.000	500
24441495	26.97	1-1/16	1.062	500
24443815	28.58	1-1/8	1.125	500
24465035	30.15	13/16	1.187	500
24471235	31.75	1-1/4	1.250	500
24647145	33.32	1-5/16	1.312	500
24654905	34.93	1-3/8	1.375	500
24662055	36.50	1-7/16	1.437	500

9001
ISO certification

GC-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24678905	38.10	1-1/2	1.500	500
24713825	39.67	1-9/16	1.562	500
24721295	41.28	1-5/8	1.625	500
24723255	42.85	1-11/16	1.687	500
24732245	44.45	1-3/4	1.750	500
24800865	46.02	1-13/16	1.812	500
24804475	47.63	1-7/8	1.875	500
24825455	49.20	1-15/16	1.937	500
24853835	50.80	2	2.000	500
24871565	63.50	2-1/2	2.500	250
24873275	69.85	2-3/4	2.750	250
24924785	76.20	3	3.000	250
Part Number	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging



9001
ISO certification

Kwiky Dot™ Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Quick Dot Disc

The Kwiky Dot™ Series disc precision masking solution is designed to withstand high temperatures. Pressure sensitive, with excellent anti-paint flaking performance in wet and hot strip applications, the disc can be removed without residue to avoid extra cleaning. Dispensed from an easy-to-handle liner, the fine structured backing increases durability.

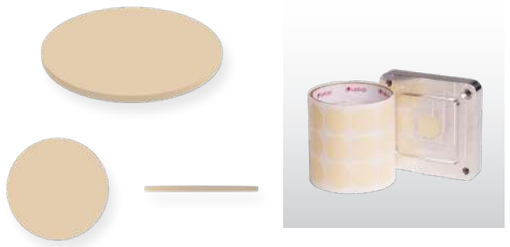

Material: Crepe Paper (CPR) with Rubber Adhesive (RA)
Temperature Resistance: 149°**C** / 300°**F**

***Also available in a tape format**

Cream (-**CM**)
RAL 9001

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24110795	1.57	1/16	0.062	2000
24111065	2.36	3/32	0.093	1000
24111735	3.00		0.118	5000
24118645	3.18	1/8	0.125	5000
24124015	3.96	5/32	0.156	1000
24127305	4.00		0.157	5000
24143425	4.75	3/16	0.187	5000
24146625	5.00		0.197	5000
24146945	5.54	7/32	0.218	1000
24149775	6.00		0.236	5000
24152275	6.35	1/4	0.250	5000
24153275	7.00		0.276	5000
24155015	7.14	9/32	0.281	1000
24156205	7.92	5/16	0.312	5000
24158695	8.00		0.315	5000
24166825	8.71	11/32	0.343	1000
24169045	9.00		0.354	5000
24170015	9.53	3/8	0.375	5000
24177125	10.00		0.394	5000
24189955	10.31	13/32	0.406	1000
24191575	11.00		0.433	5000
24199555	11.10	7/16	0.437	5000

9001
ISO certification

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

Kwiky Dot™ Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24201895	11.89	15/32	0.468	1000
24209815	12.00		0.472	5000
24221345	12.70	1/2	0.500	5000
24222595	13.00		0.512	5000
24231845	13.49	17/32	0.531	1000
24232215	14.00		0.551	5000
24238165	14.27	9/16	0.562	5000
24238205	15.00		0.591	5000
24247855	15.09	19/32	0.594	1000
24253725	15.88	5/8	0.625	5000
24260715	16.00		0.630	5000
24261085	16.66	21/32	0.656	1000
24261715	17.00		0.669	5000
24271325	17.45	11/16	0.687	4000
24272035	18.00		0.709	5000
24289365	18.26	23/32	0.719	1000
24332445	19.00		0.748	5000
24335455	19.05	3/4	0.750	4000
24346435	20.00		0.787	5000
24346545	20.62	13/16	0.812	4000
24353685	21.00		0.827	5000
24357525	22.00		0.866	2000
24375295	22.23	7/8	0.875	2000
24376095	23.00		0.906	2000
24376395	23.80	15/16	0.937	2000
24379795	24.00		0.945	2000
24385915	25.00		0.984	2000
24397745	25.40	1	1.000	2000
24405345	26.97	1-1/16	1.062	2000
24406155	28.58	1-1/8	1.125	2000
24417685	30.00		1.181	2000
24420445	30.15	1-3/16	1.187	2000
24436895	31.75	1-1/4	1.250	2000
24446055	33.32	1-5/16	1.312	2000
24451625	34.93	1-3/8	1.375	2000
24454955	35.00		1.378	2000
24468305	36.50	1-7/16	1.437	2000



9001
ISO certification

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

Kwiky Dot™ Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24470685	38.10	1-1/2	1.500	2000
24471355	39.67	1-9/16	1.562	2000
24474275	40.00		1.575	2000
24498155	41.28	1-5/8	1.625	1000
24502155	42.85	1-11/16	1.687	1000
24527655	44.45	1-3/4	1.750	1000
24535355	45.00		1.772	2000
24539305	46.02	1-13/16	1.812	1000
24540965	47.63	1-7/8	1.875	1000
24564345	49.20	1-15/16	1.937	1000
24565405	50.00		1.969	500
24565905	50.80	2	2.000	500
24568265	53.98	2-1/8	2.125	500
24573175	55.00		2.165	500
24575945	57.15	2-1/4	2.250	500
24577265	60.00		2.362	500
24581195	60.33	2-3/8	2.375	500
24586275	63.50	2-1/2	2.500	500
24601205	65.00		2.559	500
24608465	66.68	2-5/8	2.625	500
24609165	69.85	2-3/4	2.750	500
24612715	73.03	2-7/8	2.875	500
24614415	76.20	3	3.000	500
24618475	80.00		3.150	500
24618795	82.55	3-1/4	3.250	500
24619765	85.00		3.346	500
24620705	88.90	3-1/2	3.500	500
24624175	95.25	3-3/4	3.750	500
24628905	100.00		3.937	250
24643145	101.60	4	4.000	250
24652075	107.95	4-1/2	4.250	250
24656405	110.00		4.331	250
24666565	114.30	4-1/2	4.500	250
24668515	120.65	4-3/4	4.750	250
24677275	127.00	5	5.000	250
24679625	133.35	5-1/4	5.250	250
24681155	139.70	5-1/2	5.500	250

9001
ISO certification

Kwiky Dot™ Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24691125	146.05	5-3/4	5.750	250
24692435	152.40	6	6.000	250

Part Number	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging

9001
ISO certification

E-Z Peel™ Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Easy Peel Disc

The E-Z Peel™ series disc is a high temperature, pressure-sensitive masking tape for applications where precision and convenience are critical. Supplied on a core-wound liner for easier dispensing, the smooth backing ensures strength and reliability. Suitable for wet and hot stripping, the tape is residue-free and resistant to paint flaking.

Material: Paper with Adhesive (PA)
Temperature Resistance: 149°**C** / 300°**F**

***Also available in a tape format**

Cream (-**CM**)
RAL 9001

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24113915	2.36	3/32	0.093	1000
24122705	3.18	1/8	0.125	5000
24134485	3.96	5/32	0.156	1000
24148145	4.00		0.157	5000
24156885	4.75	3/16	0.187	5000
24158915	5.54	7/32	0.218	1000
24175355	6.00		0.236	5000
24186875	6.35	1/4	0.250	5000
24196485	7.00		0.276	5000
24205685	7.14	9/32	0.281	1000
24225735	7.92	5/16	0.312	5000
24230615	8.71	11/32	0.343	1000
24231935	9.53	3/8	0.375	5000
24234195	10.00		0.394	5000
24235345	10.31	13/32	0.406	1000
24235785	11.00		0.433	5000
24241385	11.10	7/16	0.437	5000
24249695	11.89	15/32	0.468	1000
24262865	12.00		0.472	5000
24278905	12.70	1/2	0.500	5000
24292245	13.49	17/32	0.531	1000
24297955	14.00		0.551	5000

9001
ISO certification

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

E-Z Peel™ Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24299115	14.27	9/16	0.562	5000
24301095	15.00		0.591	5000
24304445	15.09	19/32	0.594	1000
24306405	15.88	5/8	0.625	5000
24308035	16.00		0.630	5000
24309115	16.66	21/32	0.656	1000
24319485	17.45	11/16	0.687	4000
24335885	18.00		0.709	5000
24348865	18.26	23/32	0.719	1000
24357085	19.05	3/4	0.750	4000
24357675	20.00		0.787	5000
24359045	20.62	13/16	0.812	4000
24369495	22.00		0.866	2000
24371935	22.23	7/8	0.875	2000
24372915	23.00		0.906	2000
24403815	23.80	15/16	0.937	2000
24418145	25.40	1	1.000	2000
24422235	26.97	1-1/16	1.062	2000
24430475	28.58	1-1/8	1.125	2000
24432615	30.15	1-3/16	1.187	2000
24434315	31.00		1.220	2000
24436815	31.75	1-1/4	1.250	2000
24437695	33.32	1-5/16	1.312	2000
24448685	34.93	1-3/8	1.375	2000
24451445	35.00		1.378	2000
24456125	36.50	1-7/16	1.437	2000
24461915	38.00		1.496	2000
24465235	38.10	1-1/2	1.500	2000
24492935	39.67	1-9/16	1.562	2000
24499105	40.00		1.575	2000
24502255	41.28	1-5/8	1.625	1000
24505135	42.85	1-11/16	1.687	1000
24516145	44.45	1-3/4	1.750	1000
24539005	46.02	1-13/16	1.812	1000
24552105	47.63	1-7/8	1.875	1000
24552175	49.20	1-15/16	1.937	1000
24554255	50.80	2	2.000	500



9001
ISO certification

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

E-Z Peel™ Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24561325	53.98	2-1/8	2.125	500
24564735	57.15	2-1/4	2.250	500
24565125	60.33	2-3/8	2.375	500
24571145	63.50	2-1/2	2.500	500
24571245	66.68	2-5/8	2.625	500
24575015	69.85	2-3/4	2.750	500
24582985	73.03	2-7/8	2.875	500
24584195	76.20	3	3.000	500
24584305	80.00		3.150	500
24599765	82.55	3-1/4	3.250	500
24607525	88.90	3-1/2	3.500	500
24609705	95.25	3-3/4	3.750	500
24611995	101.60	4	4.000	250
24617265	107.95	4-1/4	4.250	250
24618095	114.30	4-1/2	4.500	250
24623565	120.65	4-3/4	4.750	250
24631435	127.00	5	5.000	250
24655535	133.35	5-1/4	5.250	250
24660055	139.70	5-1/2	5.500	250
24668885	146.05	5-3/4	5.750	250
24673335	152.40	6	6.000	250

Part Number	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging

9001
ISO certification

TF-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Teflon Disc

The TF-SH Series disc provides acid resistant component protection during high temperature industrial processes. Maintaining integrity and effectiveness, the disc is electrically conductive for even distribution of component surface currents during electroplating and professional finish. X-ray opacity enables clear identification during inspection.

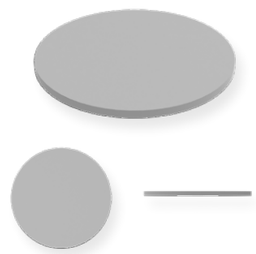

Material: Teflon (PTFE)
Temperature Resistance: 204°**C** / 400°**F**

***Also available in a tape format**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24222965	3.18	1/8	0.125	2000
24132355	4.75	3/16	0.187	2000
24171165	6.35	1/4	0.250	2000
24192555	7.92	5/16	0.312	2000
24200265	9.53	3/8	0.375	2000
24225635	11.10	7/16	0.437	2000
24229085	12.70	1/2	0.500	2000
24252135	14.27	9/16	0.562	2000
24262325	15.88	5/8	0.625	2000
24271285	17.45	11/16	0.687	1000
24311005	19.05	3/4	0.750	1000
24314805	20.62	13/16	0.812	1000
24335745	22.23	7/8	0.875	500
24341035	23.80	15/16	0.937	500
24364865	25.40	1	1.000	500
24372225	26.97	1-1/16	1.062	500
24377405	28.58	1-1/8	1.125	500
24401785	30.15	1-3/16	1.187	500
24410525	31.75	1-1/4	1.250	500
24461305	33.32	1-5/16	1.312	500
24475705	34.93	1-3/8	1.375	500
24477365	36.50	1-7/16	1.437	500

9001
ISO certification

TF-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24481195	38.10	1-1/2	1.500	500
24483195	39.67	1-9/16	1.562	500
24491175	41.28	1-5/8	1.625	250
24515615	42.85	1-11/16	1.687	250
24528335	44.45	1-3/4	1.750	250
24547255	46.02	1-13/16	1.812	250
24556195	47.63	1-7/8	1.875	250
24574805	49.20	1-15/16	1.937	250
24582855	50.80	2	2.000	100
24589145	57.15	2-1/4	2.250	100
24595375	63.50	2-1/2	2.500	100
24597505	82.55	3-1/4	3.250	100
24604065	127.00	5	5.000	100

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	

9001
ISO certification

AF-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Foil Disc

The AF-SH Series foil disc combines high temperature resistance with the ability to withstand moisture, acids and other harsh chemicals while maintaining consistent integrity and functionality. The disc has built-in heat conductivity, for efficient heat transfer, during processes where thermal performance is critical to ensuring a quality finish.

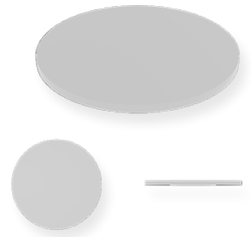

Material: Aluminium (Al)
Temperature Resistance: 148**°C** / 300**°F**

***Also available in a tape format**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24108885	3.00		0.118	2000
24112855	3.18	1/8	0.125	2000
24134735	4.75	3/16	0.187	2000
24141345	5.00		0.197	2000
24148065	6.35	1/4	0.250	2000
24194995	7.14	9/32	0.281	1000
24225415	7.92	5/16	0.312	2000
24240755	8.00		0.315	2000
24254445	8.73	11/32	0.343	1000
24256865	9.53	3/8	0.375	2000
24257145	10.00		0.394	2000
24264745	11.10	7/16	0.437	2000
24298625	11.89	15/32	0.468	1000
24306455	12.00		0.472	2000
24322455	12.70	1/2	0.500	2000
24332755	13.00		0.512	2000
24360415	14.00		0.551	2000
24364415	14.27	9/16	0.562	2000
24405725	15.00		0.591	2000
24418535	15.88	5/8	0.625	2000
24418775	16.00		0.630	2000
24420635	17.00		0.669	1000

9001
ISO certification

AF-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24422635	17.45	11/16	0.687	1000
24435115	18.00		0.709	1000
24457725	19.00		0.748	1000
24478825	19.05	3/4	0.750	1000
24481495	20.00		0.787	1000
24488165	20.62	13/16	0.812	1000
24509705	21.00		0.827	500
24512095	22.00		0.866	500
24514495	22.23	7/8	0.875	500
24530215	23.00		0.906	500
24564065	23.80	15/16	0.937	500
24581685	24.00		0.945	500
24594595	25.00		0.984	500
24598155	25.40	1	1.000	500
24616455	26.97	1-1/16	1.062	500
24618145	28.58	1-1/8	1.125	500
24626445	30.00		1.181	500
24633065	30.15	1-3/16	1.187	500
24633915	31.75	1-1/4	1.250	500
24634265	33.32	1-5/16	1.312	500
24637765	34.93	1-3/8	1.375	500
24640875	36.50	1-7/16	1.437	500
24645475	38.10	1-1/2	1.500	500
24646335	39.67	1-9/16	1.562	500
24647315	40.00		1.575	250
24649645	41.28	1-5/8	1.625	250
24667505	42.85	1-11/16	1.687	250
24678435	44.45	1-3/4	1.750	250
24696815	45.00		1.772	250
24716365	46.02	1-13/16	1.812	250
24721875	47.63	1-7/8	1.875	250
24731205	49.20	1-15/16	1.937	250
24734885	50.00		1.969	250
24737855	50.80	2	2.000	100
24742585	53.98	2-1/8	2.125	100
24746475	57.15	2-1/4	2.250	100
24747185	60.33	2-3/8	2.375	100



9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

AF-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24757745	63.50	2-1/2	2.500	100
24765665	66.68	2-5/8	2.625	100
24770475	69.85	2-3/4	2.750	100
24770655	73.03	2-7/8	2.875	100
24776665	76.20	3	3.000	100
24776795	82.55	3-1/4	3.250	100
24787125	88.90	3-1/2	3.500	100
24796455	95.25	3-3/4	3.750	100
24815505	101.60	4	4.000	100
24816095	107.95	4-1/4	4.250	100
24818665	114.30	4-1/2	4.500	100
24820115	120.65	4-3/4	4.750	100
24820135	127.00	5	5.000	100
24822515	139.70	5-1/2	5.500	100
24823925	152.40	6	6.000	100

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	



9001
ISO certification

caplugs

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

LF-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Foil Disc

The LF-SH Series disc delivers integrity and performance at varying temperatures. Combining electrical conductivity for consistent distribution of plating material and acid resistance, the disk is highly suitable for maintaining an electrical path during industrial processes. Opacity under x-ray inspection enables easy identification or inspection.



Material: Lead (Pb)
Temperature Resistance: 107°**C** / 225°**F**

***Also available in a tape format**

Aluminum (-**AL**)
RAL 9006

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24109155	3.18	1/8	0.125	2000
24122835	4.75	3/16	0.187	2000
24125655	4.00		0.158	2000
24127435	6.00		0.236	2000
24136535	6.35	1/4	0.250	2000
24155175	7.00		0.276	2000
24162615	7.92	5/16	0.312	2000
24165725	8.00		0.315	2000
24173085	9.00		0.354	2000
24175705	9.53	3/8	0.375	2000
24192775	10.00		0.393	2000
24198605	11.10	7/16	0.437	2000
24200335	12.00		0.472	2000
24214315	12.70	1/2	0.500	2000
24222315	13.00		0.512	2000
24223545	14.00		0.551	2000
24236125	14.27	9/16	0.562	2000
24240245	15.00		0.591	2000
24257995	15.88	5/8	0.625	2000
24273055	16.00		0.630	2000
24276825	17.45	11/16	0.687	1000
24286335	18.00		0.709	1000

9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

LF-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging
	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
24306365	19.00		0.748	1000
24309735	19.05	3/4	0.750	1000
24324605	20.00		0.787	1000
24362135	20.62	13/16	0.812	1000
24366815	22.00		0.866	500
24392195	22.23	7/8	0.875	500
24406005	23.80	15/16	0.937	500
24426815	25.00		0.984	500
24452565	25.40	1	1.000	500
24455795	26.97	1-1/16	1.062	500
24489615	28.58	1-1/8	1.125	500
24528325	30.00		1.180	500
24532605	30.15	1-3/16	1.187	500
24546585	31.75	1-1/4	1.250	500
24556575	33.32	1-5/16	1.312	500
24558965	34.93	1-3/8	1.375	500
24599185	35.00		1.380	250
24616115	36.50	1-7/16	1.437	500
24619115	37.00		1.460	500
24637785	38.10	1-1/2	1.500	500
24646135	39.67	1-9/16	1.562	500
24649925	41.28	1-5/8	1.625	250
24678205	42.85	1-11/16	1.687	250
24719995	44.45	1-3/4	1.750	250
24731265	45.00		1.772	250
24736985	46.02	1-13/16	1.812	250
24775655	47.63	1-7/8	1.875	250
24776825	49.20	1-15/16	1.937	250
24790475	50.00		1.970	250
24797565	50.80	2	2.000	100
24820225	57.15	2-1/4	2.250	100
24820265	63.50	2-1/2	2.500	100
24824755	69.85	2-3/4	2.750	100

Part Number	D	D	D	Discs per roll
	Outside diameter	Outside diameter	Outside diameter	
	Dimensions in mm	Dimension in imperial fraction	Dimension in imperial	Packaging



9001
ISO certification

caplugs

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

PCD-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Precision Donut Shape

The PCD-SH Series donut shape enables precision masking to protect critical component areas, including threads and holes, from unwanted coating. Firm adhesion without leaving residue maintains surface cleanliness and retains the quality and functionality of masked areas. Resilience at high temperature ensures effective performance without degrading.

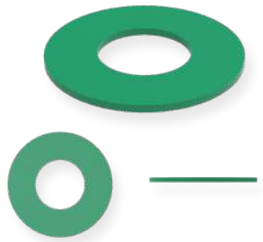

Material: Polyester (PET)
Temperature Resistance: 204°**C** / 400°**F**

***Also available in a tape format**

Green (-**GN**)
RAL 6032

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimension in imperial		Packaging
	D	d	D	d	Discs per roll
	Outside diameter	Inside diameter	Outside diameter	Inside diameter	
24115565	7.92	3.17	0.312	0.125	1000
24149185	12.70	3.17	0.500	0.125	1000
24321175	12.70	4.75	0.500	0.187	1000
24380605	12.70	6.35	0.500	0.250	1000
24422225	14.27	3.96	0.375	0.156	1000
24427035	14.27	6.35	0.562	0.250	1000
24441705	15.87	7.13	0.625	0.281	1000
24515455	19.05	6.35	0.750	0.250	1000
24543585	20.62	10.31	0.812	0.406	1000
24546745	22.22	9.52	0.875	0.375	1000
24560465	25.40	6.35	1.000	0.250	500
24564485	31.75	4.75	1.250	0.187	500
24623705	31.75	12.70	1.250	0.500	500
24746755	34.92	14.27	1.375	0.562	500

Part Number	D	d	D	d	Discs per roll
	Outside diameter	Inside diameter	Outside diameter	Inside diameter	
	Dimensions in mm		Dimension in imperial		Packaging

9001
ISO certification

Visit **www.caplugs.eu** for full product information and build your order with precision and confidence.

PCSQ-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Pre-Cut Refining Tape

The PCSQ-SH Series pre-cut square tape is designed in consistent shapes that are quick to apply. Capable of withstanding raised temperatures, the tape enables precise high-performance protection and no-residue removal for a clean finish. Easy usage delivers a practical masking solution, driving efficiencies and quality across industrial processes.

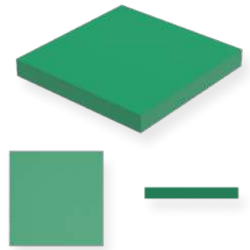



Material: Polyester (PET)
Temperature Resistance: 204°**C** / 400°**F**

***Also available in a tape format**



Green (-**GN**)
RAL 6032

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in imperial fractions		Dimension in imperial		Packaging
	L	W	L	W	L	W	Quantity per roll
	Length	Width	Length	Width	Length	Width	
24166495	6.35	6.35	1/4	1/4	0.250	0.250	1000
24208575	9.52	9.52	3/8	3/8	0.375	0.375	1000
24316695	12.70	12.70	1/2	1/2	0.500	0.500	1000
24518385	15.87	15.87	5/8	5/8	0.625	0.625	1000
24734555	19.05	19.05	3/4	3/4	0.750	0.750	1000
24808475	25.40	25.40	1	1	1.000	1.000	500
24937705	38.10	38.10	1-1/2	1-1/2	1.500	1.500	500
24954265	50.80	50.80	2	2	2.000	2.000	250

Part Number	L	W	L	W	L	W	Quantity per roll
	Length	Width	Length	Width	Length	Width	
	Dimensions in mm		Dimensions in imperial fractions		Dimension in imperial		Packaging

9001
ISO certification

Our engineering experts are ready to help you with fully customised solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

PCRT-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Pre-Cut Streamlining Tape

The PCRT-SH Series pre-cut rectangular tape is uniformly shaped for consistent masking coverage, in situations where precision is critical. The design streamlines the application process for efficiency of operation and removal is residue-free for a clean and crisp finish. High temperature resistance ensures integrity and performance are maintained.

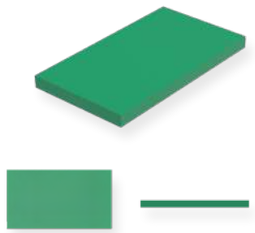



Material: Polyester (PET)
Temperature Resistance: 204°**C** / 400°**F**

***Also available in a tape format**

Green (-**GN**)
RAL 6032

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Dimensions in imperial fractions		Dimension in imperial		Packaging
	L	W	L	W	L	W	Quantity per roll
	Length	Width	Length	Width	Length	Width	
24101315	6.35	12.70	1/4	1/2	0.250	0.500	1000
24124315	6.35	19.05	1/4	3/4	0.250	0.750	1000
24153115	6.35	25.40	1/4	1	0.250	1.000	1000
24567055	12.70	19.05	1/2	3/4	0.500	0.750	1000
24599345	12.70	25.40	1/2	1	0.500	1.000	1000
24654335	12.70	38.10	1/2	1-1/2	0.500	1.500	1000
24721845	19.05	25.40	3/4	1	0.750	1.000	500

Part Number	L	W	L	W	L	W	Quantity per roll
	Length	Width	Length	Width	Length	Width	
	Dimensions in mm		Dimensions in imperial fractions		Dimension in imperial		Packaging

9001
ISO certification

Visit **www.caplugs.eu** for full product information and build your order with precision and confidence.

AIR-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Aircraft Window Mask

The AIR-SH Series aircraft window mask has a kiss-cut design to ensure template-fit sealing around the window and avoid overspray or damage during maintenance. Two variants are available, one for paint masking, the other for protection during stripping processes. The mask fits window sizes specified by major manufacturers, or it can be customised.

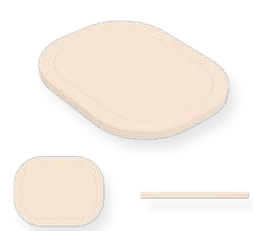

Material: Crepe Paper (CP) or Aluminium (Al)
Temperature Resistance: 121°**C** / 250°**F**

***Also available in other materials for high temperature applications**

Tan (-**TN**)
RAL 9003

Aluminum (-**AL**)
RAL 9006

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Fits aircraft type
24102196	Aluminum	Airbus A300
24124166	Aluminum	Airbus A320
24129346	Paper	Airbus A320
24165346	Aluminum	Airbus A330
24166366	Paper	Airbus A330
24172856	Aluminum	Boeing 727
24182626	Paper	Boeing 727
24184626	Aluminum	Boeing 737
24200546	Paper	Boeing 737
24205546	Aluminum	Boeing 747
24213036	Paper	Boeing 747
24213106	Aluminum	Boeing 757
24230226	Paper	Boeing 757
24279796	Aluminum	Boeing 767
24293096	Paper	Boeing 767
24302126	Aluminum	Boeing 777
24311316	Paper	Boeing 777
24333106	Aluminum	Bombardier CRJ200
24339636	Paper	Bombardier CRJ200
24341146	Paper	British Aerospace BAC1-11
24346556	Paper	British Aerospace BAe 146
24347656	Aluminum	Cessna Citation
24355506	Paper	Cessna Citation
24363196	Aluminum	De Havilland Canada DHC-8

9001
ISO certification

14001
ISO certification

Our engineering experts are ready to help you with fully customised solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

AIR-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Fits aircraft type
24384836	Paper	De Havilland Canada DHC-8
24387296	Aluminum	Fokker F27
24411816	Paper	Fokker F27
24412556	Aluminum	Fokker F28
24414346	Paper	Fokker F28
24420656	Aluminum	Lockheed C-130
24426446	Paper	Lockheed C-130
24432806	Aluminum	Lockheed L-1011
24441756	Paper	Lockheed L-1011
24466216	Paper	McDonnell Douglas DC-10
24475536	Aluminum	McDonnell Douglas DC-10
24478056	Aluminum	McDonnell Douglas DC-8
24487696	Paper	McDonnell Douglas DC-8
24489406	Aluminum	McDonnell Douglas DC-9
24489956	Paper	McDonnell Douglas DC-9
24492396	Aluminum	McDonnell Douglas MD-11
24514116	Paper	McDonnell Douglas MD-11
24517746	Aluminum	McDonnell Douglas MD-80
24524336	Paper	McDonnell Douglas MD-80
24543256	Aluminum	McDonnell Douglas MD-81
24553626	Paper	McDonnell Douglas MD-81
24563836	Aluminum	McDonnell Douglas MD-82
24563956	Aluminum	McDonnell Douglas MD-83
24566516	Paper	McDonnell Douglas MD-83
24601136	Aluminum	McDonnell Douglas MD-90
24626336	Paper	McDonnell Douglas MD-90
24646076	Aluminum	Tupolev TU-154
24648716	Paper	Tupolev TU-154
Part Number	**Material**	**Fits aircraft type**

9001
ISO certification

14001
ISO certification

Custom Solutions for the Aerospace & Defense Industries

The OEMs and MROs of the aerospace and defense market use a wide range of parts for protection, finishing, shipping and masking. At Caplugs, we don't just sell parts – we're here to ensure our customers' needs are met with the right part that protects your component from impact and FOD during shipment, storage, assembly, repair, refurbishment and finishing processes.

As a trusted supplier, many of our aviation customers have come to us for custom made solutions to fit their specific application. Let us take your project from concepting and prototyping to full production.

Learn more about our custom solutions

AR-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Identification Arrow

The AR-SH Series of identification arrows is highly flexible, capable of being attached permanently if required or removed without leaving any residue. Colour coding highlights specific areas, or components, and helps increase quality inspection accuracy and efficiency in complex environments. Durability is maintained even under high temperatures.

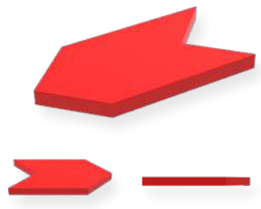



Material: Paper (CL) or Poly Vinyl Chloride (PVC)
Temperature Resistance: 121°**C** / 250°**F**

***Also available in other materials for high temperature applications**

Red (-**RD**)
RAL 3024

Blue (-**BL**)
RAL 5002

Green (-**GN**)
RAL 6032

Yellow (-**YL**)
RAL 1016

Orange (-**OR**)
RAL 2003

Black (-**BK**)
RAL 9005

White (-**WT**)
RAL 9016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Colour	Dimensions in mm		Packaging	
			W	L	Quantity per roll	Quantity per envelope
			Width	Length		
24110746	Vinyl	Black	3.18	4.76		1000
24103425	Vinyl	Black	3.18	4.76	1000	
24103925	Vinyl	Black	3.18	4.76	5000	
24111666	Paper	Blue	3.18	4.76		1000
24114596	Paper	Blue	3.18	4.76		5000
24134235	Paper	Blue	3.18	4.76	1000	
24140125	Paper	Blue	3.18	4.76	5000	
24118666	Vinyl	Blue	3.18	4.76		1000
24146025	Vinyl	Blue	3.18	4.76	1000	
24152025	Vinyl	Blue	3.18	4.76	5000	
24139256	Paper	Green	3.18	4.76		1000
24155185	Paper	Green	3.18	4.76	1000	
24158945	Paper	Green	3.18	4.76	5000	
24148106	Vinyl	Green	3.18	4.76		1000
24169185	Vinyl	Green	3.18	4.76	1000	
24172375	Vinyl	Green	3.18	4.76	5000	
24149716	Paper	Green Flourescent	3.18	4.76		1000
24157866	Paper	Green Flourescent	3.18	4.76		5000
24174745	Paper	Green Flourescent	3.18	4.76	1000	
24183975	Paper	Green Flourescent	3.18	4.76	5000	
24158006	Paper	Orange	3.18	4.76		1000
24162416	Paper	Orange	3.18	4.76		5000

9001
ISO certification

14001
ISO certification

AR-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Colour	Dimensions in fractions		Dimensions in inches		Packaging	
			W	L	W	L	Quantity per roll	Quantity per envelope
			Width	Length	Width	Length		
24110746	Vinyl	Black	1/8	3/16	0.125	0.188		1000
24103425	Vinyl	Black	1/8	3/16	0.125	0.188	1000	
24103925	Vinyl	Black	1/8	3/16	0.125	0.188	5000	
24111666	Paper	Blue	1/8	3/16	0.125	0.188		1000
24114596	Paper	Blue	1/8	3/16	0.125	0.188		5000
24134235	Paper	Blue	1/8	3/16	0.125	0.188	1000	
24140125	Paper	Blue	1/8	3/16	0.125	0.188	5000	
24118666	Vinyl	Blue	1/8	3/16	0.125	0.188		1000
24146025	Vinyl	Blue	1/8	3/16	0.125	0.188	1000	
24152025	Vinyl	Blue	1/8	3/16	0.125	0.188	5000	
24139256	Paper	Green	1/8	3/16	0.125	0.188		1000
24155185	Paper	Green	1/8	3/16	0.125	0.188	1000	
24158945	Paper	Green	1/8	3/16	0.125	0.188	5000	
24148106	Vinyl	Green	1/8	3/16	0.125	0.188		1000
24169185	Vinyl	Green	1/8	3/16	0.125	0.188	1000	
24172375	Vinyl	Green	1/8	3/16	0.125	0.188	5000	
24149716	Paper	Green Flourescent	1/8	3/16	0.125	0.188		1000
24157866	Paper	Green Flourescent	1/8	3/16	0.125	0.188		5000
24174745	Paper	Green Flourescent	1/8	3/16	0.125	0.188	1000	
24183975	Paper	Green Flourescent	1/8	3/16	0.125	0.188	5000	
24158006	Paper	Orange	1/8	3/16	0.125	0.188		1000
24162416	Paper	Orange	1/8	3/16	0.125	0.188		5000

9001
ISO certification

14001
ISO certification

AR-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Colour	Dimensions in mm		Packaging	
			W	L	Quantity per roll	Quantity per envelope
			Width	Length		
24184465	Paper	Orange	3.18	4.76	1000	
24190875	Paper	Orange	3.18	4.76	5000	
24171156	Vinyl	Orange	3.18	4.76		1000
24190985	Vinyl	Orange	3.18	4.76	1000	
24192025	Vinyl	Orange	3.18	4.76	5000	
24205166	Paper	Pink Flourescent	3.18	4.76		1000
24219706	Paper	Pink Flourescent	3.18	4.76		5000
24197145	Paper	Pink Flourescent	3.18	4.76	1000	
24197415	Paper	Pink Flourescent	3.18	4.76	5000	
24222156	Paper	Red	3.18	4.76		1000
24224326	Paper	Red	3.18	4.76		5000
24198315	Paper	Red	3.18	4.76	1000	
24206875	Paper	Red	3.18	4.76	5000	
24225886	Vinyl	Red	3.18	4.76		1000
24233336	Vinyl	Red	3.18	4.76		5000
24212065	Vinyl	Red	3.18	4.76	1000	
24219595	Vinyl	Red	3.18	4.76	5000	
24233986	Paper	Red Flourescent	3.18	4.76		1000
24235266	Paper	Red Flourescent	3.18	4.76		5000
24226155	Paper	Red Flourescent	3.18	4.76	1000	
24231765	Paper	Red Flourescent	3.18	4.76	5000	
24245006	Paper	White	3.18	4.76		1000
24251316	Paper	White	3.18	4.76		5000
24232145	Paper	White	3.18	4.76	1000	
24232325	Paper	White	3.18	4.76	5000	
24254916	Vinyl	White	3.18	4.76		5000
24237195	Vinyl	White	3.18	4.76	1000	
24240365	Vinyl	White	3.18	4.76	5000	
24261746	Paper	Yellow	3.18	4.76		1000
24268456	Paper	Yellow	3.18	4.76		5000
24245025	Paper	Yellow	3.18	4.76	1000	
24246525	Paper	Yellow	3.18	4.76	5000	
24269406	Vinyl	Yellow	3.18	4.76		1000
24270936	Vinyl	Yellow	3.18	4.76		5000
24249075	Vinyl	Yellow	3.18	4.76	1000	
24254655	Vinyl	Yellow	3.18	4.76	5000	
24271746	Paper	Yellow Flourescent	3.18	4.76		1000
24273096	Paper	Yellow Flourescent	3.18	4.76		5000



9001
ISO certification

14001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

AR-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Colour	Dimensions in fractions		Dimensions in inches		Packaging	
			W	L	W	L	Quantity per roll	Quantity per envelope
			Width	Length	Width	Length		
24184465	Paper	Orange	1/8	3/16	0,125	0,188	1000	
24190875	Paper	Orange	1/8	3/16	0.125	0.188	5000	
24171156	Vinyl	Orange	1/8	3/16	0.125	0.188		1000
24190985	Vinyl	Orange	1/8	3/16	0.125	0.188	1000	
24192025	Vinyl	Orange	1/8	3/16	0.125	0.188	5000	
24205166	Paper	Pink Flourescent	1/8	3/16	0.125	0.188		1000
24219706	Paper	Pink Flourescent	1/8	3/16	0.125	0.188		5000
24197145	Paper	Pink Flourescent	1/8	3/16	0.125	0.188	1000	
24197415	Paper	Pink Flourescent	1/8	3/16	0.125	0.188	5000	
24222156	Paper	Red	1/8	3/16	0.125	0.188		1000
24224326	Paper	Red	1/8	3/16	0.125	0.188		5000
24198315	Paper	Red	1/8	3/16	0.125	0.188	1000	
24206875	Paper	Red	1/8	3/16	0.125	0.188	5000	
24225886	Vinyl	Red	1/8	3/16	0.125	0.188		1000
24233336	Vinyl	Red	1/8	3/16	0.125	0.188		5000
24212065	Vinyl	Red	1/8	3/16	0.125	0.188	1000	
24219595	Vinyl	Red	1/8	3/16	0.125	0.188	5000	
24233986	Paper	Red Flourescent	1/8	3/16	0.125	0.188		1000
24235266	Paper	Red Flourescent	1/8	3/16	0.125	0.188		5000
24226155	Paper	Red Flourescent	1/8	3/16	0.125	0.188	1000	
24231765	Paper	Red Flourescent	1/8	3/16	0.125	0.188	5000	
24245006	Paper	White	1/8	3/16	0.125	0.188		1000
24251316	Paper	White	1/8	3/16	0.125	0.188		5000
24232145	Paper	White	1/8	3/16	0.125	0.188	1000	
24232325	Paper	White	1/8	3/16	0.125	0.188	5000	
24254916	Vinyl	White	1/8	3/16	0.125	0.188		5000
24237195	Vinyl	White	1/8	3/16	0.125	0.188	1000	
24240365	Vinyl	White	1/8	3/16	0.125	0.188	5000	
24261746	Paper	Yellow	1/8	3/16	0.125	0.188		1000
24268456	Paper	Yellow	1/8	3/16	0.125	0.188		5000
24245025	Paper	Yellow	1/8	3/16	0.125	0.188	1000	
24246525	Paper	Yellow	1/8	3/16	0.125	0.188	5000	
24269406	Vinyl	Yellow	1/8	3/16	0.125	0.188		1000
24270936	Vinyl	Yellow	1/8	3/16	0.125	0.188		5000
24249075	Vinyl	Yellow	1/8	3/16	0.125	0.188	1000	
24254655	Vinyl	Yellow	1/8	3/16	0.125	0.188	5000	
24271746	Paper	Yellow Flourescent	1/8	3/16	0.125	0.188		1000
24273096	Paper	Yellow Flourescent	1/8	3/16	0,125	0,188		5000



9001
ISO certification

14001
ISO certification

caplugs

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

AR-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Colour	Dimensions in mm		Packaging	
			W	L	Quantity per roll	Quantity per envelope
			Width	Length		
24256015	Paper	Yellow Flourescent	3.18	4.76	1000	
24260665	Paper	Yellow Flourescent	3.18	4.76	5000	
24273156	Vinyl	Black	4.76	6.35		1000
24263115	Vinyl	Black	4.76	6.35	1000	
24266095	Vinyl	Black	4.76	6.35	5000	
24276036	Paper	Blue	4.76	6.35		1000
24287696	Paper	Blue	4.76	6.35		5000
24271705	Paper	Blue	4.76	6.35	1000	
24271795	Paper	Blue	4.76	6.35	5000	
24293796	Vinyl	Blue	4.76	6.35		1000
24290015	Vinyl	Blue	4.76	6.35	1000	
24292685	Vinyl	Blue	4.76	6.35	5000	
24295656	Paper	Green	4.76	6.35		1000
24296896	Paper	Green	4.76	6.35		5000
24298175	Paper	Green	4.76	6.35	1000	
24299255	Paper	Green	4.76	6.35	5000	
24297326	Vinyl	Green	4.76	6.35		1000
24305166	Vinyl	Green	4.76	6.35		5000
24300175	Vinyl	Green	4.76	6.35	1000	
24300725	Vinyl	Green	4.76	6.35	5000	
24307226	Paper	Green Flourescent	4.76	6.35		1000
24310766	Paper	Green Flourescent	4.76	6.35		5000
24302165	Paper	Green Flourescent	4.76	6.35	1000	
24304995	Paper	Green Flourescent	4.76	6.35	5000	
24323296	Paper	Orange	4.76	6.35		1000
24326776	Paper	Orange	4.76	6.35		5000
24312235	Paper	Orange	4.76	6.35	1000	
24329976	Vinyl	Orange	4.76	6.35		1000
24314525	Vinyl	Orange	4.76	6.35	1000	
24316455	Vinyl	Orange	4.76	6.35	5000	
24334836	Paper	Pink Flourescent	4.76	6.35		1000
24341616	Paper	Pink Flourescent	4.76	6.35		5000
24321155	Paper	Pink Flourescent	4.76	6.35	1000	
24321205	Paper	Pink Flourescent	4.76	6.35	5000	
24344586	Paper	Red	4.76	6.35		1000
24360736	Paper	Red	4.76	6.35		5000
24328355	Paper	Red	4.76	6.35	1000	
24328525	Paper	Red	4.76	6.35	5000	



9001
ISO certification

14001
ISO certification

AR-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Colour	Dimensions in fractions		Dimensions in inches		Packaging	
			W	L	W	L	Quantity per roll	Quantity per envelope
			Width	Length	Width	Length		
24256015	Paper	Yellow Flourescent	1/8	3/16	0,125	0,188	1000	
24260665	Paper	Yellow Flourescent	1/8	3/16	0.125	0.188	5000	
24273156	Vinyl	Black	3/16	1/4	0.188	0.250		1000
24263115	Vinyl	Black	3/16	1/4	0.188	0.250	1000	
24266095	Vinyl	Black	3/16	1/4	0.188	0.250	5000	
24276036	Paper	Blue	3/16	1/4	0.188	0.250		1000
24287696	Paper	Blue	3/16	1/4	0.188	0.250		5000
24271705	Paper	Blue	3/16	1/4	0.188	0.250	1000	
24271795	Paper	Blue	3/16	1/4	0.188	0.250	5000	
24293796	Vinyl	Blue	3/16	1/4	0.188	0.250		1000
24290015	Vinyl	Blue	3/16	1/4	0.188	0.250	1000	
24292685	Vinyl	Blue	3/16	1/4	0.188	0.250	5000	
24295656	Paper	Green	3/16	1/4	0.188	0.250		1000
24296896	Paper	Green	3/16	1/4	0.188	0.250		5000
24298175	Paper	Green	3/16	1/4	0.188	0.250	1000	
24299255	Paper	Green	3/16	1/4	0.188	0.250	5000	
24297326	Vinyl	Green	3/16	1/4	0.188	0.250		1000
24305166	Vinyl	Green	3/16	1/4	0.188	0.250		5000
24300175	Vinyl	Green	3/16	1/4	0.188	0.250	1000	
24300725	Vinyl	Green	3/16	1/4	0.188	0.250	5000	
24307226	Paper	Green Flourescent	3/16	1/4	0.188	0.250		1000
24310766	Paper	Green Flourescent	3/16	1/4	0.188	0.250		5000
24302165	Paper	Green Flourescent	3/16	1/4	0.188	0.250	1000	
24304995	Paper	Green Flourescent	3/16	1/4	0.188	0.250	5000	
24323296	Paper	Orange	3/16	1/4	0.188	0.250		1000
24326776	Paper	Orange	3/16	1/4	0.188	0.250		5000
24312235	Paper	Orange	3/16	1/4	0.188	0.250	1000	
24329976	Vinyl	Orange	3/16	1/4	0.188	0.250		1000
24314525	Vinyl	Orange	3/16	1/4	0.188	0.250	1000	
24316455	Vinyl	Orange	3/16	1/4	0.188	0.250	5000	
24334836	Paper	Pink Flourescent	3/16	1/4	0.188	0.250		1000
24341616	Paper	Pink Flourescent	3/16	1/4	0.188	0.250		5000
24321155	Paper	Pink Flourescent	3/16	1/4	0.188	0.250	1000	
24321205	Paper	Pink Flourescent	3/16	1/4	0.188	0.250	5000	
24344586	Paper	Red	3/16	1/4	0.188	0.250		1000
24360736	Paper	Red	3/16	1/4	0.188	0.250		5000
24328355	Paper	Red	3/16	1/4	0,188	0,250	1000	
24328525	Paper	Red	3/16	1/4	0,188	0,250	5000	



9001
ISO certification

14001
ISO certification

AR-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Colour	Dimensions in mm		Packaging	
			W	L	Quantity per roll	Quantity per envelope
			Width	Length		
24362636	Vinyl	Red	4.76	6.35		1000
24365536	Vinyl	Red	4.76	6.35		5000
24330965	Vinyl	Red	4.76	6.35	1000	
24342855	Vinyl	Red	4.76	6.35	5000	
24366626	Paper	Red Flourescent	4.76	6.35		1000
24376356	Paper	Red Flourescent	4.76	6.35		5000
24345245	Paper	Red Flourescent	4.76	6.35	1000	
24350945	Paper	Red Flourescent	4.76	6.35	5000	
24378826	Paper	White	4.76	6.35		1000
24380676	Paper	White	4.76	6.35		5000
24352875	Paper	White	4.76	6.35	1000	
24353735	Paper	White	4.76	6.35	5000	
24384656	Vinyl	White	4.76	6.35		1000
24354995	Vinyl	White	4.76	6.35	1000	
24358235	Vinyl	White	4.76	6.35	5000	
24392476	Paper	Yellow	4.76	6.35		1000
24393986	Paper	Yellow	4.76	6.35		5000
24358765	Paper	Yellow	4.76	6.35	1000	
24363355	Paper	Yellow	4.76	6.35	5000	
24400506	Vinyl	Yellow	4.76	6.35		1000
24408826	Vinyl	Yellow	4.76	6.35		5000
24365295	Vinyl	Yellow	4.76	6.35	1000	
24372405	Vinyl	Yellow	4.76	6.35	5000	
24411716	Paper	Yellow Flourescent	4.76	6.35		1000
24377995	Paper	Yellow Flourescent	4.76	6.35	1000	
24378815	Paper	Yellow Flourescent	4.76	6.35	5000	
24414456	Vinyl	Black	6.35	9.53		1000
24378925	Vinyl	Black	6.35	9.53	1000	
24382905	Vinyl	Black	6.35	9.53	5000	
24419556	Paper	Blue	6.35	9.53		1000
24420436	Paper	Blue	6.35	9.53		5000
24394005	Paper	Blue	6.35	9.53	1000	
24434576	Vinyl	Blue	6.35	9.53		1000
24405705	Vinyl	Blue	6.35	9.53	1000	
24407475	Vinyl	Blue	6.35	9.53	5000	
24440716	Paper	Green	6.35	9.53		1000
24443656	Paper	Green	6.35	9.53		5000
24409165	Paper	Green	6.35	9.53	1000	



9001
ISO certification

14001
ISO certification

AR-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Colour	Dimensions in fractions		Dimensions in inches		Packaging	
			W	L	W	L	Quantity per roll	Quantity per envelope
			Width	Length	Width	Length		
24362636	Vinyl	Red	3/16	1/4	0,188	0,250		1000
24365536	Vinyl	Red	3/16	1/4	0.188	0.250		5000
24330965	Vinyl	Red	3/16	1/4	0.188	0.250	1000	
24342855	Vinyl	Red	3/16	1/4	0.188	0.250	5000	
24366626	Paper	Red Flourescent	3/16	1/4	0.188	0.250		1000
24376356	Paper	Red Flourescent	3/16	1/4	0.188	0.250		5000
24345245	Paper	Red Flourescent	3/16	1/4	0.188	0.250	1000	
24350945	Paper	Red Flourescent	3/16	1/4	0.188	0.250	5000	
24378826	Paper	White	3/16	1/4	0.188	0.250		1000
24380676	Paper	White	3/16	1/4	0.188	0.250		5000
24352875	Paper	White	3/16	1/4	0.188	0.250	1000	
24353735	Paper	White	3/16	1/4	0.188	0.250	5000	
24384656	Vinyl	White	3/16	1/4	0.188	0.250		1000
24354995	Vinyl	White	3/16	1/4	0.188	0.250	1000	
24358235	Vinyl	White	3/16	1/4	0.188	0.250	5000	
24392476	Paper	Yellow	3/16	1/4	0.188	0.250		1000
24393986	Paper	Yellow	3/16	1/4	0.188	0.250		5000
24358765	Paper	Yellow	3/16	1/4	0.188	0.250	1000	
24363355	Paper	Yellow	3/16	1/4	0.188	0.250	5000	
24400506	Vinyl	Yellow	3/16	1/4	0.188	0.250		1000
24408826	Vinyl	Yellow	3/16	1/4	0.188	0.250		5000
24365295	Vinyl	Yellow	3/16	1/4	0.188	0.250	1000	
24372405	Vinyl	Yellow	3/16	1/4	0.188	0.250	5000	
24411716	Paper	Yellow Flourescent	3/16	1/4	0.188	0.250		1000
24377995	Paper	Yellow Flourescent	3/16	1/4	0.188	0.250	1000	
24378815	Paper	Yellow Flourescent	3/16	1/4	0.188	0.250	5000	
24414456	Vinyl	Black	1/4	3/8	0.250	0.375		1000
24378925	Vinyl	Black	1/4	3/8	0.250	0.375	1000	
24382905	Vinyl	Black	1/4	3/8	0.250	0.375	5000	
24419556	Paper	Blue	1/4	3/8	0.250	0.375		1000
24420436	Paper	Blue	1/4	3/8	0.250	0.375		5000
24394005	Paper	Blue	1/4	3/8	0.250	0.375	1000	
24434576	Vinyl	Blue	1/4	3/8	0.250	0.375		1000
24405705	Vinyl	Blue	1/4	3/8	0.250	0.375	1000	
24407475	Vinyl	Blue	1/4	3/8	0.250	0.375	5000	
24440716	Paper	Green	1/4	3/8	0,250	0,375		1000
24443656	Paper	Green	1/4	3/8	0,250	0,375		5000
24409165	Paper	Green	1/4	3/8	0,250	0,375	1000	



9001
ISO certification

14001
ISO certification

AR-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Colour	Dimensions in mm		Packaging	
			W	L	Quantity per roll	Quantity per envelope
			Width	Length		
24582815	Paper	Green	6.35	9.53	5000	
24446926	Vinyl	Green	6.35	9.53		1000
24417235	Vinyl	Green	6.35	9.53	1000	
24424085	Vinyl	Green	6.35	9.53	5000	
24447536	Paper	Green Flourescent	6.35	9.53		1000
24429365	Paper	Green Flourescent	6.35	9.53	1000	
24429725	Paper	Green Flourescent	6.35	9.53	5000	
24456906	Paper	Orange	6.35	9.53		1000
24458196	Paper	Orange	6.35	9.53		5000
24437825	Paper	Orange	6.35	9.53	1000	
24445395	Paper	Orange	6.35	9.53	5000	
24470126	Vinyl	Orange	6.35	9.53		1000
24447535	Vinyl	Orange	6.35	9.53	1000	
24453275	Vinyl	Orange	6.35	9.53	5000	
24471556	Paper	Pink Flourescent	6.35	9.53		1000
24474936	Paper	Pink Flourescent	6.35	9.53		5000
24472165	Paper	Pink Flourescent	6.35	9.53	1000	
24473465	Paper	Pink Flourescent	6.35	9.53	5000	
24478546	Paper	Red	6.35	9.53		1000
24479456	Paper	Red	6.35	9.53		5000
24475695	Paper	Red	6.35	9.53	1000	
24481635	Paper	Red	6.35	9.53	5000	
24482636	Vinyl	Red	6.35	9.53		1000
24487396	Vinyl	Red	6.35	9.53		5000
24492165	Vinyl	Red	6.35	9.53	1000	
24502955	Vinyl	Red	6.35	9.53	5000	
24492166	Paper	Red Flourescent	6.35	9.53		1000
24492666	Paper	Red Flourescent	6.35	9.53		5000
24505985	Paper	Red Flourescent	6.35	9.53	1000	
24507875	Paper	Red Flourescent	6.35	9.53	5000	
24496766	Paper	White	6.35	9.53		1000
24497476	Paper	White	6.35	9.53		5000
24508985	Paper	White	6.35	9.53	1000	
24509885	Paper	White	6.35	9.53	5000	
24499596	Vinyl	White	6.35	9.53		1000
24510495	Vinyl	White	6.35	9.53	1000	
24512035	Vinyl	White	6.35	9.53	5000	
24521656	Paper	Yellow	6.35	9.53		1000

9001
ISO certification

14001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

AR-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Colour	Dimensions in fractions		Dimensions in inches		Packaging	
			W	L	W	L	Quantity per roll	Quantity per envelope
			Width	Length	Width	Length		
24409165	Paper	Green	1/4	3/8	0,250	0,375	5000	
24446926	Vinyl	Green	1/4	3/8	0.250	0.375		1000
24417235	Vinyl	Green	1/4	3/8	0.250	0.375	1000	
24424085	Vinyl	Green	1/4	3/8	0.250	0.375	5000	
24447536	Paper	Green Flourescent	1/4	3/8	0.250	0.375		1000
24429365	Paper	Green Flourescent	1/4	3/8	0.250	0.375	1000	
24429725	Paper	Green Flourescent	1/4	3/8	0.250	0.375	5000	
24456906	Paper	Orange	1/4	3/8	0.250	0.375		1000
24458196	Paper	Orange	1/4	3/8	0.250	0.375		5000
24437825	Paper	Orange	1/4	3/8	0.250	0.375	1000	
24445395	Paper	Orange	1/4	3/8	0.250	0.375	5000	
24470126	Vinyl	Orange	1/4	3/8	0.250	0.375		1000
24447535	Vinyl	Orange	1/4	3/8	0.250	0.375	1000	
24453275	Vinyl	Orange	1/4	3/8	0.250	0.375	5000	
24471556	Paper	Pink Flourescent	1/4	3/8	0.250	0.375		1000
24474936	Paper	Pink Flourescent	1/4	3/8	0.250	0.375		5000
24472165	Paper	Pink Flourescent	1/4	3/8	0.250	0.375	1000	
24473465	Paper	Pink Flourescent	1/4	3/8	0.250	0.375	5000	
24478546	Paper	Red	1/4	3/8	0.250	0.375		1000
24479456	Paper	Red	1/4	3/8	0.250	0.375		5000
24475695	Paper	Red	1/4	3/8	0.250	0.375	1000	
24481635	Paper	Red	1/4	3/8	0.250	0.375	5000	
24482636	Vinyl	Red	1/4	3/8	0.250	0.375		1000
24487396	Vinyl	Red	1/4	3/8	0.250	0.375		5000
24492165	Vinyl	Red	1/4	3/8	0.250	0.375	1000	
24502955	Vinyl	Red	1/4	3/8	0.250	0.375	5000	
24492166	Paper	Red Flourescent	1/4	3/8	0.250	0.375		1000
24492666	Paper	Red Flourescent	1/4	3/8	0.250	0.375		5000
24505985	Paper	Red Flourescent	1/4	3/8	0.250	0.375	1000	
24507875	Paper	Red Flourescent	1/4	3/8	0.250	0.375	5000	
24496766	Paper	White	1/4	3/8	0.250	0.375		1000
24497476	Paper	White	1/4	3/8	0.250	0.375		5000
24508985	Paper	White	1/4	3/8	0.250	0.375	1000	
24509885	Paper	White	1/4	3/8	0.250	0.375	5000	
24499596	Vinyl	White	1/4	3/8	0,250	0,375		1000
24510495	Vinyl	White	1/4	3/8	0,250	0,375	1000	
24512035	Vinyl	White	1/4	3/8	0,250	0,375	5000	
24521656	Paper	Yellow	1/4	3/8	0,250	0,375		1000

9001
ISO certification

14001
ISO certification

caplugs

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

AR-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Colour	Dimensions in mm		Packaging	
			W	L	Quantity per roll	Quantity per envelope
			Width	Length		
24524136	Paper	Yellow	6.35	9.53		5000
24515055	Paper	Yellow	6.35	9.53	1000	
24525726	Vinyl	Yellow	6.35	9.53		1000
24527916	Vinyl	Yellow	6.35	9.53		5000
24522785	Vinyl	Yellow	6.35	9.53	1000	
24534045	Vinyl	Yellow	6.35	9.53	5000	
24529136	Paper	Yellow Flourescent	6.35	9.53		1000
24532496	Paper	Yellow Flourescent	6.35	9.53		5000
24549015	Paper	Yellow Flourescent	6.35	9.53	1000	
24557205	Paper	Yellow Flourescent	6.35	9.53	5000	
24559475	Vinyl	Black	7.94	19.05	1000	
24559835	Vinyl	Black	7.94	19.05	5000	
24535576	Paper	Blue	7.94	19.05		1000
24560905	Paper	Blue	7.94	19.05	1000	
24563655	Paper	Blue	7.94	19.05	5000	
24543566	Vinyl	Blue	7.94	19.05		1000
24571915	Vinyl	Blue	7.94	19.05	1000	
24572405	Vinyl	Blue	7.94	19.05	5000	
24546196	Paper	Green	7.94	19.05		1000
24574545	Paper	Green	7.94	19.05	1000	
24587705	Paper	Green	7.94	19.05	5000	
24547746	Vinyl	Green	7.94	19.05		1000
24551436	Vinyl	Green	7.94	19.05		5000
24607935	Vinyl	Green	7.94	19.05	1000	
24621465	Vinyl	Green	7.94	19.05	5000	
24555346	Paper	Green Flourescent	7.94	19.05		1000
24622715	Paper	Green Flourescent	7.94	19.05	1000	
24625065	Paper	Green Flourescent	7.94	19.05	5000	
24581656	Paper	Orange	7.94	19.05		1000
24625745	Paper	Orange	7.94	19.05	1000	
24627015	Paper	Orange	7.94	19.05	5000	
24629725	Vinyl	Orange	7.94	19.05	1000	
24632835	Vinyl	Orange	7.94	19.05	5000	
24583766	Paper	Pink Flourescent	7.94	19.05		1000
24633365	Paper	Pink Flourescent	7.94	19.05	1000	
24644955	Paper	Pink Flourescent	7.94	19.05	5000	
24593986	Paper	Red	7.94	19.05		5000
24605896	Paper	Red	7.94	19.05		5000



9001
ISO certification

14001
ISO certification

AR-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Colour	Dimensions in fractions		Dimensions in inches		Packaging	
			W	L	W	L	Quantity per roll	Quantity per envelope
			Width	Length	Width	Length		
24524136	Paper	Yellow	1/4	3/8	0,250	0,375		5000
24515055	Paper	Yellow	1/4	3/8	0.250	0.375	1000	
24525726	Vinyl	Yellow	1/4	3/8	0.250	0.375		1000
24527916	Vinyl	Yellow	1/4	3/8	0.250	0.375		5000
24522785	Vinyl	Yellow	1/4	3/8	0.250	0.375	1000	
24534045	Vinyl	Yellow	1/4	3/8	0.250	0.375	5000	
24529136	Paper	Yellow Flourescent	1/4	3/8	0.250	0.375		1000
24532496	Paper	Yellow Flourescent	1/4	3/8	0.250	0.375		5000
24549015	Paper	Yellow Flourescent	1/4	3/8	0.250	0.375	1000	
24557205	Paper	Yellow Flourescent	1/4	3/8	0.250	0.375	5000	
24559475	Vinyl	Black	5/16	3/4	0.313	0.750	1000	
24559835	Vinyl	Black	5/16	3/4	0.313	0.750	5000	
24535576	Paper	Blue	5/16	3/4	0.313	0.750		1000
24560905	Paper	Blue	5/16	3/4	0.313	0.750	1000	
24563655	Paper	Blue	5/16	3/4	0.313	0.750	5000	
24543566	Vinyl	Blue	5/16	3/4	0.313	0.750		1000
24571915	Vinyl	Blue	5/16	3/4	0.313	0.750	1000	
24572405	Vinyl	Blue	5/16	3/4	0.313	0.750	5000	
24546196	Paper	Green	5/16	3/4	0.313	0.750		1000
24574545	Paper	Green	5/16	3/4	0.313	0.750	1000	
24587705	Paper	Green	5/16	3/4	0.313	0.750	5000	
24547746	Vinyl	Green	5/16	3/4	0.313	0.750		1000
24551436	Vinyl	Green	5/16	3/4	0.313	0.750		5000
24607935	Vinyl	Green	5/16	3/4	0.313	0.750	1000	
24621465	Vinyl	Green	5/16	3/4	0.313	0.750	5000	
24555346	Paper	Green Flourescent	5/16	3/4	0.313	0.750		1000
24622715	Paper	Green Flourescent	5/16	3/4	0.313	0.750	1000	
24625065	Paper	Green Flourescent	5/16	3/4	0.313	0.750	5000	
24581656	Paper	Orange	5/16	3/4	0.313	0.750		1000
24625745	Paper	Orange	5/16	3/4	0.313	0.750	1000	
24627015	Paper	Orange	5/16	3/4	0.313	0.750	5000	
24629725	Vinyl	Orange	5/16	3/4	0.313	0.750	1000	
24632835	Vinyl	Orange	5/16	3/4	0.313	0.750	5000	
24583766	Paper	Pink Flourescent	5/16	3/4	0,313	0,750		1000
24633365	Paper	Pink Flourescent	5/16	3/4	0,313	0,750	1000	
24644955	Paper	Pink Flourescent	5/16	3/4	0,313	0,750	5000	
24593986	Paper	Red	5/16	3/4	0,313	0,750		5000
24605896	Paper	Red	5/16	3/4	0,313	0,750		5000



9001
ISO certification

14001
ISO certification

AR-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Colour	Dimensions in mm		Packaging	
			W	L	Quantity per roll	Quantity per envelope
			Width	Length		
24661485	Paper	Red	7.94	19.05	1000	
24667675	Paper	Red	7.94	19.05	5000	
24607316	Vinyl	Red	7.94	19.05		1000
24619426	Vinyl	Red	7.94	19.05		5000
24675805	Vinyl	Red	7.94	19.05	1000	
24678885	Vinyl	Red	7.94	19.05	5000	
24627366	Paper	Red Flouresent	7.94	19.05		1000
24636336	Paper	Red Flouresent	7.94	19.05		5000
24679715	Paper	Red Flouresent	7.94	19.05	1000	
24683535	Paper	Red Flouresent	7.94	19.05	5000	
24650016	Paper	White	7.94	19.05		5000
24690615	Paper	White	7.94	19.05	1000	
24693325	Paper	White	7.94	19.05	5000	
24697205	Vinyl	White	7.94	19.05	1000	
24699465	Vinyl	White	7.94	19.05	5000	
24652286	Paper	Yellow	7.94	19.05		1000
24706025	Paper	Yellow	7.94	19.05	1000	
24712305	Paper	Yellow	7.94	19.05	5000	
24662436	Vinyl	Yellow	7.94	19.05		1000
24713075	Vinyl	Yellow	7.94	19.05	1000	
24721575	Vinyl	Yellow	7.94	19.05	5000	
24682396	Paper	Yellow Flouresent	7.94	19.05		1000
24724935	Paper	Yellow Flouresent	7.94	19.05	1000	
24725635	Paper	Yellow Flouresent	7.94	19.05	5000	



9001
ISO certification

14001
ISO certification

AR-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Colour	Dimensions in fractions		Dimensions in inches		Packaging	
			W	L	W	L	Quantity per roll	Quantity per envelope
			Width	Length	Width	Length		
24661485	Paper	Red	5/16	3/4	0,313	0,750	1000	
24667675	Paper	Red	5/16	3/4	0.313	0.750	5000	
24607316	Vinyl	Red	5/16	3/4	0.313	0.750		1000
24619426	Vinyl	Red	5/16	3/4	0.313	0.750		5000
24675805	Vinyl	Red	5/16	3/4	0.313	0.750	1000	
24678885	Vinyl	Red	5/16	3/4	0.313	0.750	5000	
24627366	Paper	Red Flouresent	5/16	3/4	0.313	0.750		1000
24636336	Paper	Red Flouresent	5/16	3/4	0.313	0.750		5000
24679715	Paper	Red Flouresent	5/16	3/4	0.313	0.750	1000	
24683535	Paper	Red Flouresent	5/16	3/4	0.313	0.750	5000	
24650016	Paper	White	5/16	3/4	0.313	0.750		5000
24690615	Paper	White	5/16	3/4	0.313	0.750	1000	
24693325	Paper	White	5/16	3/4	0.313	0.750	5000	
24697205	Vinyl	White	5/16	3/4	0.313	0.750	1000	
24699465	Vinyl	White	5/16	3/4	0.313	0.750	5000	
24652286	Paper	Yellow	5/16	3/4	0.313	0.750		1000
24706025	Paper	Yellow	5/16	3/4	0.313	0.750	1000	
24712305	Paper	Yellow	5/16	3/4	0.313	0.750	5000	
24662436	Vinyl	Yellow	5/16	3/4	0.313	0.750		1000
24713075	Vinyl	Yellow	5/16	3/4	0.313	0.750	1000	
24721575	Vinyl	Yellow	5/16	3/4	0.313	0.750	5000	
24682396	Paper	Yellow Flouresent	5/16	3/4	0.313	0.750		1000
24724935	Paper	Yellow Flouresent	5/16	3/4	0.313	0.750	1000	
24725635	Paper	Yellow Flouresent	5/16	3/4	0.313	0.750	5000	



9001
ISO certification

14001
ISO certification

CD-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Identification Dots Disc

The CD-SH Series of identification dots includes colour coding to enable fast, accurate identification or inspection of flagged components. Easily applied, and removable without residue, the dots can also be permanently fixed in place if required. High temperature resistance without integrity loss maintains functionality in demanding environments.



Material: Paper (CL) or Poly Vinyl Chloride (PVC)
Temperature Resistance: 121°**C** / 250°**F**

***Also available in other materials for high temperature applications**

Also available in: Black (-**BK**) RAL 9005

Red (-**RD**) RAL 3024 | Blue (-**BL**) RAL 5002 | Green (-**GN**) RAL 6032 | Yellow (-**YL**) RAL 1016 | Brown (-**BN**) RAL 8015 | Orange (-**OR**) RAL 2003 | White (-**WT**) RAL 9016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Colour	Dimensions in mm	Dimensions in Imperial fraction	Dimensions in imperial	Packaging
			D	D	D	Quantity per roll
			Outside diameter	Outside diameter	Outside diameter	
24110185	Paper	Blue	3.18	1/8	0.125	1000
24110325	Paper	Blue	3.18	1/8	0.125	5000
24116545	Vinyl	Blue	3.18	1/8	0.125	1000
24118915	Vinyl	Blue	3.18	1/8	0.125	5000
24125995	Paper	Black	3.18	1/8	0.125	1000
24127745	Vinyl	Black	3.18	1/8	0.125	1000
24128645	Vinyl	Black	3.18	1/8	0.125	5000
24133745	Vinyl	Brown	3.18	1/8	0.125	1000
24141835	Vinyl	Brown	3.18	1/8	0.125	5000
24152145	Paper	Green	3.18	1/8	0.125	1000
24152515	Paper	Green	3.18	1/8	0.125	5000
24159155	Paper	Green flourescent	3.18	1/8	0.125	1000
24159845	Paper	Green flourescent	3.18	1/8	0.125	5000
24166025	Vinyl	Green	3.18	1/8	0.125	1000
24167375	Vinyl	Green	3.18	1/8	0.125	5000
24169565	Paper	Orange	3.18	1/8	0.125	1000
24184435	Paper	Orange	3.18	1/8	0.125	5000
24187865	Vinyl	Orange	3.18	1/8	0.125	1000
24190325	Vinyl	Orange	3.18	1/8	0.125	5000
24193165	Paper	Pink flourescent	3.18	1/8	0.125	1000
24195335	Paper	Pink flourescent	3.18	1/8	0.125	5000
24198375	Paper	Red	3,18	1/8	0,125	1000

9001 ISO certification

14001 ISO certification

Visit **www.caplugs.eu** for full product information and build your order with precision and confidence.

CD-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Colour	Dimensions in mm	Dimensions in Imperial fraction	Dimensions in imperial	Packaging
			D	D	D	Quantity per roll
			Outside diameter	Outside diameter	Outside diameter	
24199495	Paper	Red	3.18	1/8	0.125	5000
24207625	Paper	Red flourescent	3.18	1/8	0.125	1000
24212215	Paper	Red flourescent	3.18	1/8	0.125	5000
24226775	Vinyl	Red	3.18	1/8	0.125	1000
24230865	Vinyl	Red	3.18	1/8	0.125	5000
24243025	Paper	White	3.18	1/8	0.125	1000
24244905	Paper	White	3.18	1/8	0.125	5000
24247155	Vinyl	White	3.18	1/8	0.125	1000
24248205	Vinyl	White	3.18	1/8	0.125	5000
24250185	Paper	Yellow	3.18	1/8	0.125	1000
24252465	Paper	Yellow	3.18	1/8	0.125	5000
24257075	Paper	Yellow flourescent	3.18	1/8	0.125	1000
24259595	Paper	Yellow flourescent	3.18	1/8	0.125	5000
24262635	Vinyl	Yellow	3.18	1/8	0.125	1000
24263725	Vinyl	Yellow	3.18	1/8	0.125	5000
24266675	Paper	Blue	6.35	1/4	0.250	1000
24268405	Paper	Blue	6.35	1/4	0.250	5000
24268965	Vinyl	Blue	6.35	1/4	0.250	1000
24271085	Vinyl	Blue	6.35	1/4	0.250	5000
24276805	Vinyl	Black	6.35	1/4	0.250	1000
24277605	Vinyl	Black	6.35	1/4	0.250	5000
24278725	Vinyl	Brown	6.35	1/4	0.250	1000
24285305	Vinyl	Brown	6.35	1/4	0.250	5000
24289205	Paper	Green	6.35	1/4	0.250	1000
24289285	Paper	Green	6.35	1/4	0.250	5000
24292015	Paper	Green flourescent	6.35	1/4	0.250	1000
24299085	Paper	Green flourescent	6.35	1/4	0.250	5000
24309085	Vinyl	Green	6.35	1/4	0.250	1000
24316585	Vinyl	Green	6.35	1/4	0.250	5000
24324655	Paper	Orange	6.35	1/4	0.250	1000
24331415	Paper	Orange	6.35	1/4	0.250	5000
24339165	Vinyl	Orange	6.35	1/4	0.250	1000
24340965	Vinyl	Orange	6.35	1/4	0.250	5000
24348345	Paper	Pink flourescent	6.35	1/4	0.250	1000
24370235	Paper	Pink flourescent	6.35	1/4	0.250	5000
24378795	Paper	Red	6.35	1/4	0.250	1000
24387205	Paper	Red	6.35	1/4	0.250	1000



9001 ISO certification

14001 ISO certification

Our engineering experts are ready to help you with fully customised solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

CD-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Colour	Dimensions in mm	Dimensions in Imperial fraction	Dimensions in imperial	Packaging
			D	D	D	Quantity per roll
			Outside diameter	Outside diameter	Outside diameter	
24388165	Paper	Red	6.35	1/4	0.250	5000
24388985	Paper	Red flourescent	6.35	1/4	0.250	1000
24395095	Paper	Red flourescent	6.35	1/4	0.250	1000
24405155	Paper	Red flourescent	6.35	1/4	0.250	5000
24410645	Vinyl	Red	6.35	1/4	0.250	1000
24413665	Vinyl	Red	6.35	1/4	0.250	5000
24417375	Paper	White	6.35	1/4	0.250	1000
24417835	Paper	White	6.35	1/4	0.250	5000
24420215	Vinyl	White	6.35	1/4	0.250	1000
24439195	Vinyl	White	6.35	1/4	0.250	5000
24443115	Paper	Yellow	6.35	1/4	0.250	1000
24445825	Paper	Yellow	6.35	1/4	0.250	1000
24451595	Paper	Yellow	6.35	1/4	0.250	5000
24458995	Paper	Yellow flourescent	6.35	1/4	0.250	1000
24459155	Paper	Yellow flourescent	6.35	1/4	0.250	5000
24461895	Vinyl	Yellow	6.35	1/4	0.250	1000
24462275	Vinyl	Yellow	6.35	1/4	0.250	5000
24462475	Paper	Blue	9.53	3/8	0.375	1000
24462965	Paper	Blue	9.53	3/8	0.375	5000
24463495	Vinyl	Blue	9.53	3/8	0.375	1000
24464475	Paper	Blue	9.53	3/8	0.375	5000
24471115	Vinyl	Black	9.53	3/8	0.375	1000
24472055	Vinyl	Black	9.53	3/8	0.375	5000
24473425	Vinyl	Brown	9.53	3/8	0.375	1000
24473985	Vinyl	Brown	9.53	3/8	0.375	5000
24488695	Paper	Green	9.53	3/8	0.375	1000
24492065	Paper	Green	9.53	3/8	0.375	5000
24498275	Paper	Green flourescent	9.53	3/8	0.375	1000
24499475	Paper	Green flourescent	9.53	3/8	0.375	5000
24499995	Vinyl	Green	9.53	3/8	0.375	1000
24501135	Vinyl	Green	9.53	3/8	0.375	5000
24502865	Paper	Orange	9.53	3/8	0.375	1000
24504445	Paper	Orange	9.53	3/8	0.375	5000
24509175	Vinyl	Orange	9.53	3/8	0.375	1000
24510755	Vinyl	Orange	9.53	3/8	0.375	5000
24511325	Paper	Pink flourescent	9.53	3/8	0.375	1000
24514215	Paper	Pink flourescent	9.53	3/8	0.375	5000



9001
ISO certification

14001
ISO certification

CD-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Colour	Dimensions in mm	Dimensions in Imperial fraction	Dimensions in imperial	Packaging
			D	D	D	Quantity per roll
			Outside diameter	Outside diameter	Outside diameter	
24515205	Paper	Red	9.53	3/8	0.375	1000
24515975	Paper	Red	9.53	3/8	0.375	5000
24517255	Paper	Red flourescent	9.53	3/8	0.375	1000
24521065	Paper	Red flourescent	9.53	3/8	0.375	5000
24523405	Vinyl	Red	9.53	3/8	0.375	1000
24523805	Vinyl	Red	9.53	3/8	0.375	5000
24523905	Paper	White	9.53	3/8	0.375	1000
24527065	Paper	White	9.53	3/8	0.375	5000
24529015	Vinyl	White	9.53	3/8	0.375	1000
24532375	Vinyl	White	9.53	3/8	0.375	5000
24543305	Paper	Yellow	9.53	3/8	0.375	1000
24546005	Paper	Yellow	9.53	3/8	0.375	5000
24547935	Paper	Yellow flourescent	9.53	3/8	0.375	1000
24551025	Paper	Yellow flourescent	9.53	3/8	0.375	5000
24551815	Vinyl	Yellow	9.53	3/8	0.375	1000
24558275	Vinyl	Yellow	9.53	3/8	0.375	5000
24562655	Paper	Blue	12.70	1/2	0.500	1000
24568035	Paper	Blue	12.70	1/2	0.500	5000
24568345	Vinyl	Blue	12.70	1/2	0.500	1000
24573225	Vinyl	Blue	12.70	1/2	0.500	5000
24577055	Vinyl	Black	12.70	1/2	0.500	1000
24585365	Vinyl	Black	12.70	1/2	0.500	5000
24593605	Paper	Brown	12.70	1/2	0.500	5000
24597395	Vinyl	Brown	12.70	1/2	0.500	1000
24602365	Vinyl	Brown	12.70	1/2	0.500	5000
24603665	Paper	Green	12.70	1/2	0.500	1000
24607225	Paper	Green	12.70	1/2	0.500	5000
24609555	Paper	Green flourescent	12.70	1/2	0.500	1000
24610175	Paper	Green flourescent	12.70	1/2	0.500	5000
24612665	Vinyl	Green	12.70	1/2	0.500	1000
24617505	Vinyl	Green	12.70	1/2	0.500	5000
24617575	Paper	Orange	12.70	1/2	0.500	1000
24617685	Paper	Orange	12.70	1/2	0.500	5000
24630565	Vinyl	Orange	12.70	1/2	0.500	1000
24631525	Vinyl	Orange	12.70	1/2	0.500	5000
24640715	Paper	Pink flourescent	12.70	1/2	0.500	1000
24654655	Paper	Pink flourescent	12.70	1/2	0.500	5000



9001
ISO certification

14001
ISO certification

CD-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Colour	Dimensions in mm	Dimensions in Imperial fraction	Dimensions in imperial	Packaging
			D	D	D	Quantity per roll
			Outside diameter	Outside diameter	Outside diameter	
24655475	Paper	Red	12.70	1/2	0.500	1000
24659575	Paper	Red	12.70	1/2	0.500	5000
24661295	Paper	Red flourescent	12.70	1/2	0.500	1000
24663695	Paper	Red flourescent	12.70	1/2	0.500	5000
24664845	Vinyl	Red	12.70	1/2	0.500	1000
24666465	Vinyl	Red	12.70	1/2	0.500	5000
24671605	Paper	White	12.70	1/2	0.500	1000
24676555	Paper	White	12.70	1/2	0.500	5000
24679415	Vinyl	White	12.70	1/2	0.500	1000
24680655	Vinyl	White	12.70	1/2	0.500	5000
24684735	Paper	Yellow	12.70	1/2	0.500	1000
24687675	Paper	Yellow	12.70	1/2	0.500	1000
24689275	Paper	Yellow	12.70	1/2	0.500	5000
24692425	Paper	Yellow flourescent	12.70	1/2	0.500	1000
24694465	Paper	Yellow flourescent	12.70	1/2	0.500	5000
24703875	Vinyl	Yellow	12.70	1/2	0.500	1000
24707415	Vinyl	Yellow	12.70	1/2	0.500	5000
24711045	Paper	White	15.88	5/8	0.625	1000
24720065	Paper	Blue	19.05	3/4	0.750	1000
24723935	Paper	Blue	19.05	3/4	0.750	5000
24724955	Vinyl	Blue	19.05	3/4	0.750	1000
24734865	Vinyl	Blue	19.05	3/4	0.750	5000
24740605	Vinyl	Black	19.05	3/4	0.750	1000
24741615	Vinyl	Black	19.05	3/4	0.750	5000
24749845	Vinyl	Brown	19.05	3/4	0.750	1000
24754165	Vinyl	Brown	19.05	3/4	0.750	5000
24761625	Paper	Green	19.05	3/4	0.750	1000
24763065	Paper	Green	19.05	3/4	0.750	5000
24766035	Paper	Green flourescent	19.05	3/4	0.750	1000
24767905	Paper	Green flourescent	19.05	3/4	0.750	5000
24780335	Vinyl	Green	19.05	3/4	0.750	1000
24789525	Vinyl	Green	19.05	3/4	0.750	5000
24794065	Paper	Orange	19.05	3/4	0.750	1000
24794105	Paper	Orange	19.05	3/4	0.750	5000
24795555	Vinyl	Orange	19.05	3/4	0.750	1000
24798675	Vinyl	Orange	19.05	3/4	0.750	5000
24805545	Vinyl	Orange	19.05	3/4	0.750	5000

9001
ISO certification

14001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

CD-SH Series

Masking Discs and Shapes

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Colour	Dimensions in mm	Dimensions in Imperial fraction	Dimensions in imperial	Packaging
			D	D	D	Quantity per roll
			Outside diameter	Outside diameter	Outside diameter	
24807125	Paper	Pink flourescent	19.05	3/4	0.750	1000
24808155	Paper	Pink flourescent	19.05	3/4	0.750	5000
24809775	Paper	Red	19.05	3/4	0.750	1000
24812445	Paper	Red	19.05	3/4	0.750	5000
24812835	Paper	Red flourescent	19.05	3/4	0.750	1000
24817685	Paper	Red flourescent	19.05	3/4	0.750	5000
24818135	Vinyl	Red	19.05	3/4	0.750	1000
24821725	Vinyl	Red	19.05	3/4	0.750	5000
24821985	Paper	White	19.05	3/4	0.750	1000
24836835	Paper	White	19.05	3/4	0.750	5000
24841495	Vinyl	White	19.05	3/4	0.750	1000
24843415	Vinyl	White	19.05	3/4	0.750	5000
24843465	Paper	Yellow	19.05	3/4	0.750	1000
24853755	Paper	Yellow	19.05	3/4	0.750	5000
24857925	Paper	Yellow flourescent	19.05	3/4	0.750	1000
24857985	Paper	Yellow flourescent	19.05	3/4	0.750	5000
24860425	Vinyl	Yellow	19.05	3/4	0.750	1000
24862755	Vinyl	Yellow	19.05	3/4	0.750	5000
Part Number	Material	Colour	D Outside diameter Dimensions in mm	D Outside diameter Dimensions in Imperial fraction	D Outside diameter Dimensions in imperial	Quantity per roll Packaging

9001
ISO certification

14001
ISO certification

caplugs

Our engineering experts are ready to help you with fully customised
solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

Packaging and Netting

When Secure Product Enclosure and Protection Are Critical

Caplugs packaging and netting solutions protect and enclose securely during transit, storage, and handling, preventing damage and ensuring contained products reach their destination in optimal condition. Their reusability also contributes to cost-effectiveness.

Durable designs conform closely to protected product dimensions, shielding robustly from shocks, vibrations, abrasions, and compression. Netting enables breathability and flexibility for secure coverage of perishable or sensitive contents without restricting airflow.

Applications include safe industrial and electronic components storage in manufacturing, product protection in the construction industry, and throughout the logistics and shipping process. As a result, these solutions are critical to protecting product quality, safety, and longevity, and enhancing customer satisfaction.

More details about these products on our website

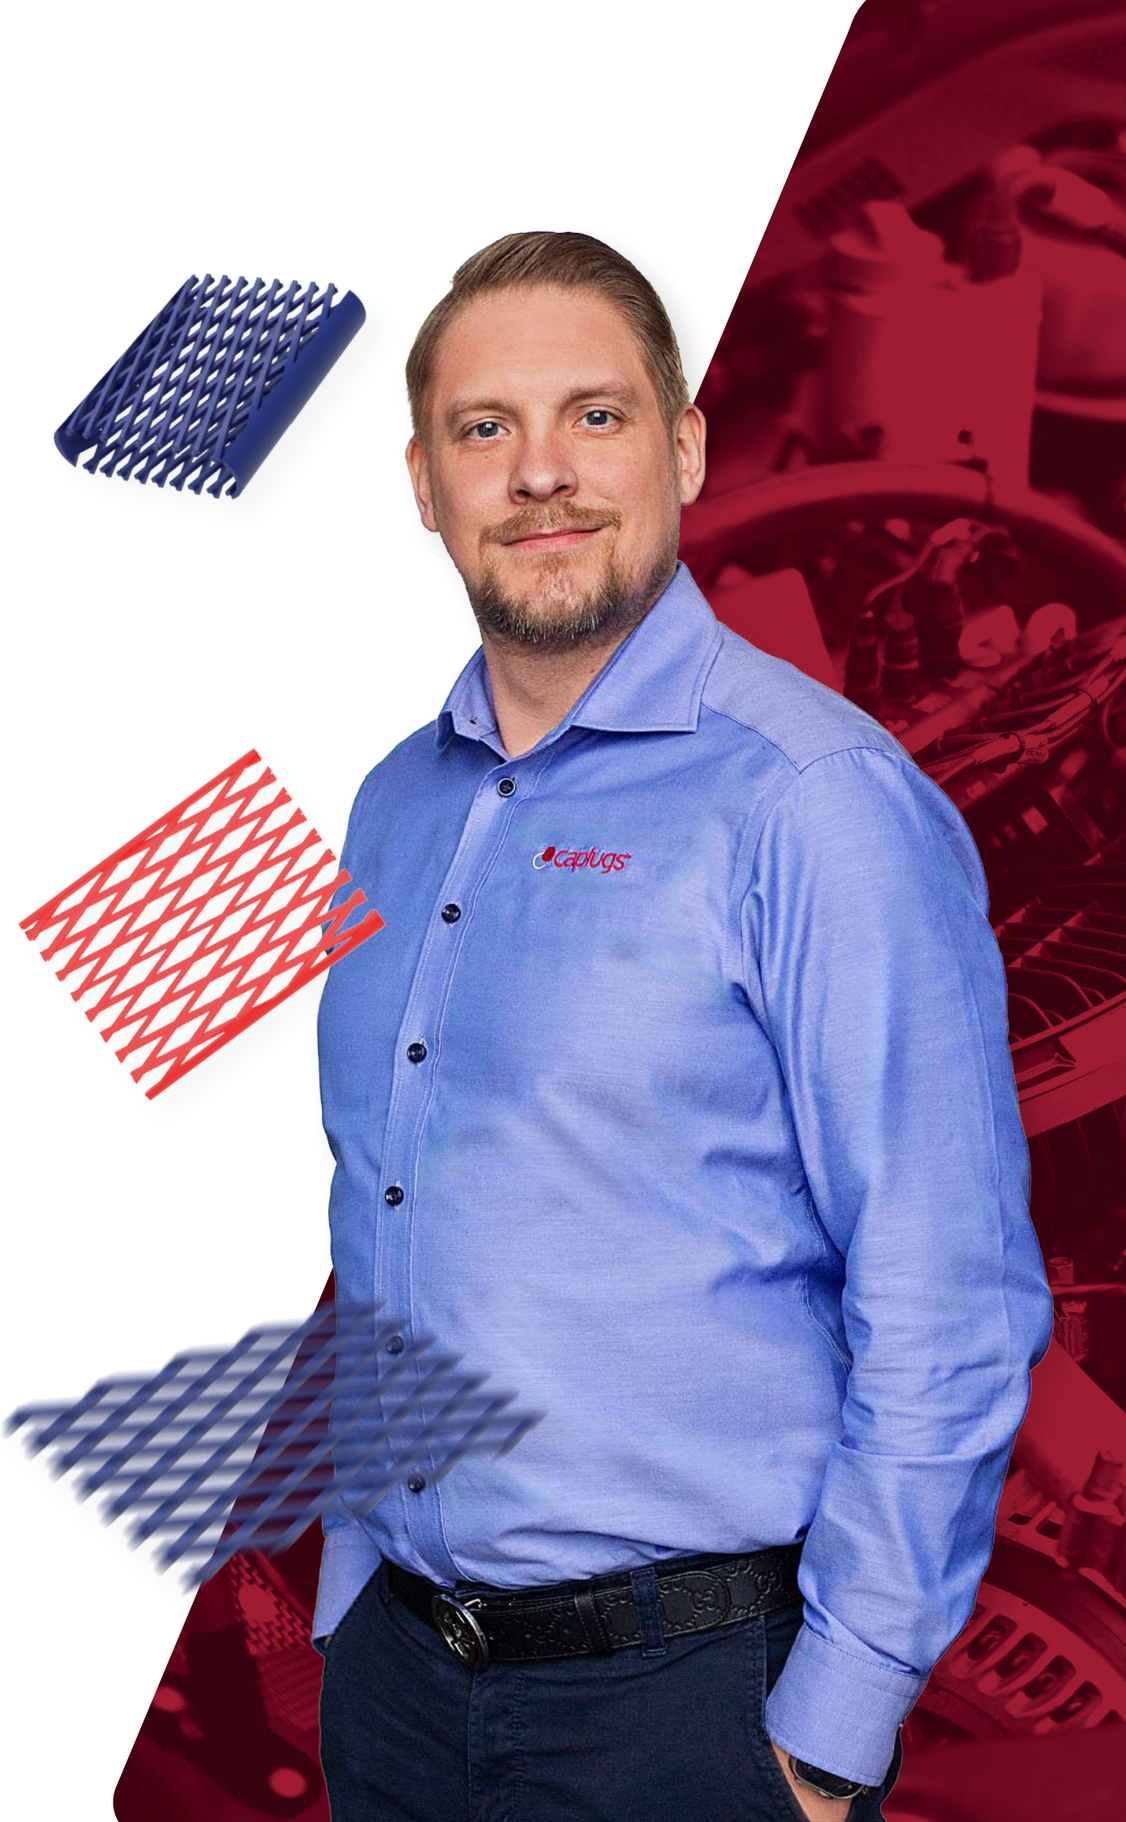

SW-Standard Series

Sleeve-Web® Netting

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Standard Duty Net

The SW Series standard netting is specifically designed to provide cost-effective damage protection of cylindrical parts. Durable with a high level of elasticity, the netting ensures non-slip grip and a snug fit on both straight-sided and tapered items. Adaptability is increased by full effectiveness in widely different operating environments.

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 79°**C** / 175°**F**

***Can be cut to custom lengths**

Also available in: Black (-**BK**) RAL 9005


Yellow (-**YL**) RAL 1016


Blue (-**BL**) RAL 5002


Green (-**GN**) RAL 6032


Orange (-**OR**) RAL 2003


Red (-**RD**) RAL 3024


White (-**WT**) RAL 9016


Clear (-**CL**) RAL 9003

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm		Dimensions in inches		Packaging			
		To fit Outside diameters		To fit Outside diameters		Standard coil		Mini coil	
		Minimum	Maximum	Minimum	Maximum	Metres	Feet	Metres	Feet
32115161	Orange	6.35	9.53	0.250	0.375	1066	3500	213	700
32220041	Green	9.53	19.05	0.375	0.750	914	3000	182	600
32262471	Blue	12.70	25.40	0.500	1.000	838	2750	167	550
32312561	Red	25.40	38.10	1.000	1.500	518	1700	103	340
32353131	Black	38.10	50.80	1.500	2.000	274	900	54	180
32400561	White	50.80	63.50	2.000	2.500	243	800	48	160
32402161	Yellow	63.50	76.20	2.500	3.000	182	600	36	120
32561751	Green	76.20	101.60	3.000	4.000	137	450	27	90
32667161	Orange	101.60	127.00	4.000	5.000	106	350	21	70
32739241	Clear	127.00	158.75	5.000	6.250	76	250	15	50
32801481	Blue	158.75	190.50	6.250	7.500	76	250	15	50
32822651	Red	190.50	228.60	7.500	9.000	60	200	12	40
32959731	Yellow	228.60	254.00	9.000	10.000	60	200	12	40

Part Number	Colour	Minimum	Maximum	Minimum	Maximum	Metres	Feet	Metres	Feet
		To fit Outside diameters		To fit Outside diameters		Standard coil		Mini coil	
		Dimensions in mm		Dimensions in inches		Packaging			

9001
ISO certification

14001
ISO certification

16949
IATF certification

SW-Light Series

Sleeve-Web® Netting

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Light Duty Net

The SW Series light duty netting protects lighter and irregularly shaped parts from damage during movement or storage. Stretching easily to accommodate up to twice the original diameter, elasticity enables adaptation to a variety of shapes and sizes, for a tight fit. Attractive as outer packaging, this netting also withstands differing conditions.



Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 79°**C** / 175°**F**

***Can be cut to custom lengths**

Clear (-**CL**) RAL 9003


Blue (-**BL**) RAL 5002


Green (-**GN**) RAL 6032

Red (-**RD**) RAL 3024


Yellow (-**YL**) RAL 1016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm		Dimensions in inches		Packaging			
		To fit Outside diameters		To fit Outside diameters		Standard coil		Mini coil	
		Minimum	Maximum	Minimum	Maximum	Metres	Feet	Metres	Feet
32104491	Yellow	19.05	50.80	0.750	2.000	457	1500	91	300
32130531	Blue	31.75	76.20	1.250	3.000	304	1000	60	200
32719031	Red	50.80	101.60	2.000	4.000	243	800	48	160
32813101	Blue	101.60	203.20	4.000	8.000	182	600	36	120
32980401	Clear	152.40	304.80	6.000	12.000	60	200	12	40

Part Number	Colour	Minimum	Maximum	Minimum	Maximum	Metres	Feet	Metres	Feet
		To fit Outside diameters		To fit Outside diameters		Standard coil		Mini coil	
		Dimensions in mm		Dimensions in inches		Packaging			

9001
ISO certification

14001
ISO certification

16949
IATF certification

SW-Heavy Series

Sleeve-Web® Netting

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Heavy Duty Net

The SW Series heavy duty netting is designed to safeguard valuable precision components that require extra levels of protection. Resistant against impact, abrasion and other transport-related forms of damage this netting reduces cost by eliminating the need for other protective wrappings. The wide scale of operating temperatures offers versatility.

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 79°**C** / 175°**F**

***This product does not stretch**

Also available in: Black (-**BK**) RAL 9005, White (-**WT**) RAL 9016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm: To fit Outside diameter	Dimensions in inches: To fit Outside diameter	Packaging: Standard coil: Metres	Standard coil: Feet	Mini coil: Metres	Mini coil: Feet
32232341	White	12.70	0.500	609	2000	121	400
32407001	Orange	19.05	0.750	457	1500	91	300
32501731	Black	25.40	1.000	365	1200	73	240
32524521	Green	31.75	1.250	304	1000	60	200
32604261	Yellow	38.10	1.500	243	800	48	160
32743201	Grey	44.45	1.750	182	600	36	120
32861981	Blue	50.80	2.000	152	500	30	100
32953321	Red	63.50	2.500	152	500	30	100
32961151	White	76.20	3.000	137	450	27	90

Part Number	Colour	To fit Outside diameter	To fit Outside diameter	Metres	Feet	Metres	Feet
		Dimensions in mm	Dimensions in inches	Standard coil		Mini coil	
				Packaging			

9001
ISO certification

14001
ISO certification

16949
IATF certification

SWI Series

Sleeve-Web® Netting

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Rust Inhibitor Net

The SWI Series netting, with built-in rust inhibitor, provides protection for metal parts against corrosion and impact damage. Resistance to corrosive factors including air, humidity, and salt is enabled by the netting, at a molecular level, on metal surfaces. The need for any alternative protection is removed in multiple operating environments.

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 79°**C** / 175°**F**

***Can be cut to custom lengths**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm: To fit Outside diameters: Minimum	Dimensions in mm: To fit Outside diameters: Maximum	Dimensions in inches: To fit Outside diameters: Minimum	Dimensions in inches: To fit Outside diameters: Maximum	Packaging: Standard coil: Metres	Standard coil: Feet	Mini coil: Metres	Mini coil: Feet
32132881	Clear	6.35	9.53	0.250	0.375	1066	3500	213	700
32203071	Clear	9.53	19.05	0.375	0.750	914	3000	182	600
32239521	Clear	12.70	25.40	0.500	1.000	838	2750	167	550
32284461	Clear	25.40	38.10	1.000	1.500	518	1700	103	340
32315131	Clear	38.10	50.80	1.500	2.000	274	900	54	180
32388731	Clear	50.80	63.50	2.000	2.500	243	800	48	160
32566351	Clear	63.50	76.20	2.500	3.000	182	600	36	120
32607871	Clear	76.20	101.60	3.000	4.000	137	450	27	90
32626841	Clear	101.60	127.00	4.000	5.000	106	350	21	70
32647731	Clear	127.00	158.75	5.000	6.250	76	250	15	50
32706501	Clear	158.75	190.50	6.250	7.500	76	250	15	50
32948541	Clear	190.50	228.60	7.500	9.000	60	200	12	40
32950821	Clear	228.60	254.00	9.000	10.000	60	200	12	40

Part Number	Colour	Minimum	Maximum	Minimum	Maximum	Metres	Feet	Metres	Feet
		To fit Outside diameters		To fit Outside diameters		Standard coil		Mini coil	
		Dimensions in mm		Dimensions in inches		Packaging			

9001
ISO certification

14001
ISO certification

16949
IATF certification

PMW Series

Packaging and Netting

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Flat Sheet Net

The PMW Series flat sheet netting provides exceptional component and surface protection from impact or abrasion. Strength and flexibility make this an ideal solution for separating components in storage, especially bulky items, while resisting chemicals or contaminants. The temperature range ensures functionality in widely differing environments.

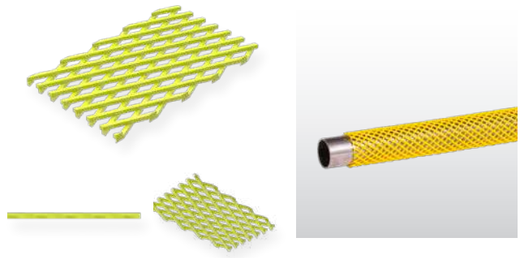

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 79°**C** / 175°**F**

***Ideal as a cover for bulky or odd shaped items**


Yellow (-**YL**)
RAL 1016


Blue (-**BL**)
RAL 5002


Red (-**RD**)
RAL 3024

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in Metric			Dimensions in Imperial			Packaging
		W	L	T	W	L	T	
		Width in mm	Length in metres	Thickness in mm	Width in inches	Length in feet	Thickness in inches	Rolls per box
32217231	Yellow	457.20	38	1.78	18.000	125	0.070	1
32855601	Blue	508.00	45	1.78	20.000	150	0.070	1
32893951	Red	609.60	38	1.78	24.000	125	0.070	1

Part Number	Colour	W	L	T	W	L	T	Rolls per box
		Width in mm	Length in metres	Thickness in mm	Width in inches	Length in feet	Thickness in inches	
		Dimensions in Metric			Dimensions in Imperial			Packaging

9001
ISO certification

14001
ISO certification

16949
IATF certification

CBW Series

Packaging and Netting

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Cut Bottle-Web Net

The CBW Series web netting gives high levels of surface and impact protection for bottles of different sizes and shapes. The extruded design maintains netting strand integrity, to ensure stability and consistent performance, and a wide choice of strengths, stretching and elasticity is available. Service temperature range also increases versatility.

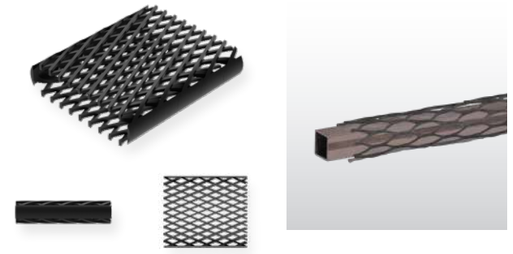

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 79°**C** / 175°**F**

***Can be cut to custom lengths**


Black (-**BK**)
RAL 9005


Green (-**GN**)
RAL 6032


Red (-**RD**)
RAL 3024

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm			Dimensions in inches			Packaging
		To fit Outside diameters		Length	To fit Outside diameters		Length	Quantity per box
		Minimum	Maximum	L	Minimum	Maximum	L	
32222201	Black	76.20	127.00	177.80	3.000	5.000	7.000	400
32260411	Green	76.20	127.00	177.80	3.000	5.000	7.000	400
32327851	Red	76.20	127.00	177.80	3.000	5.000	7.000	400
32448751	Black	76.20	127.00	254.00	3.000	5.000	10.000	275
32754351	Green	76.20	127.00	254.00	3.000	5.000	10.000	275
32789631	Red	76.20	127.00	254.00	3.000	5.000	10.000	275

Part Number	Colour	Minimum	Maximum	L	Minimum	Maximum	L	Quantity per box
		To fit Outside diameters		Length	To fit Outside diameters		Length	
		Dimensions in mm			Dimensions in inches			Packaging

9001
ISO certification

14001
ISO certification

16949
IATF certification

CSW Series

Packaging and Netting

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Sleeve-Web® Net

The CSW Series Sleeve-Web® netting is designed to provide cost-effective protection against damage such as scratches, as well as rust build-up. Protected products remain in optimal visual and working condition over time, with benefits including reduced maintenance. Important product safety information also stays intact and visible, for compliance.

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 79°**C** / 175°**F**

***Can be cut to custom lengths**



Clear (-**CL**)
RAL 9003

Blue (-**BL**)
RAL 5002

Green (-**GN**)
RAL 6024

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	Dimensions in mm		Dimensions in inches		Packaging	
		To fit Outside diameter	Length L	To fit Outside diameter	Length L	Carton quantity	Mini pack quantity
32141971	Blue	177.80	635.00	7.000	25.000	50	N/A
32172801	Green	177.80 to 228.60	444.50	7.000 to 9.000	17.500	100	20
32636661	Clear	234.95	152.40	9.250	6.000	210	50
32666201	Clear	234.95	914.40	9.250	36.000	40	N/A
32674911	Clear	317.50	152.40	12.500	6.000	250	50

Part Number	Colour	To fit Outside diameter	L Length	To fit Outside diameter	L Length	Carton quantity	Mini pack quantity
		Dimensions in mm		Dimensions in inches		Packaging	

9001
ISO certification

14001
ISO certification

16949
IATF certification

CSWF Series

Packaging and Netting

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Open / Closed Sleeve Net

The CSWF Series shares a flexible netting-style design, to ensure optimal protection of instruments or tools during manufacture, storage, and transportation. The open sleeve version (CSWF) is efficient to fit. The closed sleeve variant (CSWF-C) provides an additional shield, with a flattened end and built-in pull tab for enhanced ease of handling.

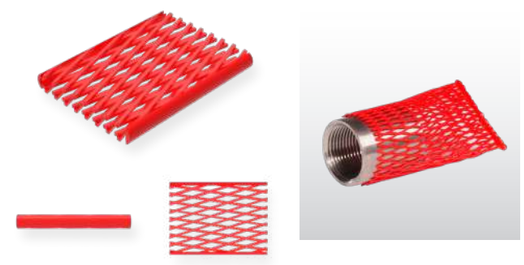

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 79°**C** / 175°**F**

***Can be cut to custom lengths**



Red (-**RD**)
RAL 3024

Blue (-**BL**)
RAL 5002

Orange (-**OR**)
RAL 2003

Green (-**GN**)
RAL 6024

White (-**WT**)
RAL 9016

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Colour	End style	Dimensions in mm		Dimensions in inches		Packaging	
			Width W	Length L	Width W	Length L	Carton quantity	Mini pack quantity
32169261	Orange	Both ends open	10.16	76.20	0.400	3.000	1200	240
32233391	Green	Both ends open	14.99	76.20	0.590	3.000	1200	240
32253471	Blue	Both ends open	20.07	76.20	0.790	3.000	1200	240
32333961	Red	Both ends open	40.13	76.20	1.580	3.000	1200	240
32357531	Black	Both ends open	59.94	76.20	2.360	3.000	1200	240
32422121	White	Both ends open	70.10	76.20	2.760	3.000	1200	240
32466111	Orange	One end closed	10.16	76.20	0.400	3.000	1200	240
32562551	Green	One end closed	14.99	76.20	0.590	3.000	1200	240
32644701	Blue	One end closed	20.07	76.20	0.790	3.000	1200	240
32780731	Red	One end closed	40.13	76.20	1.580	3.000	1200	240

Part Number	Colour	End style	W Width	L Length	W Width	L Length	Carton quantity	Mini pack quantity
			Dimensions in mm		Dimensions in inches		Packaging	

9001
ISO certification

14001
ISO certification

16949
IATF certification

Pipe and Flange Protection

When Protecting Piping Systems Integrity Is Critical

Caplugs pipe and flange protection products provide essential safeguarding against contamination,corrosion, debris, and physical damage during shipping, storage, and installation. Designs include caps, covers, and wraps, robustly engineered for a secure fit over flanges and pipe ends.

Where maintaining piping systems integrity is of paramount importance, they shield connection points and internal surfaces from environmental factors including UV exposure, moisture, and extreme temperatures.

With built-in ease of installation, these products facilitate operational efficiency, while reliably contributing to leak and failure prevention in industries such as oil and gas, water treatment, and construction. As a result, they enhance safety, prolong operational lifecycles of key components, and contribute to increased critical systems uptime.

More details about these products on our website

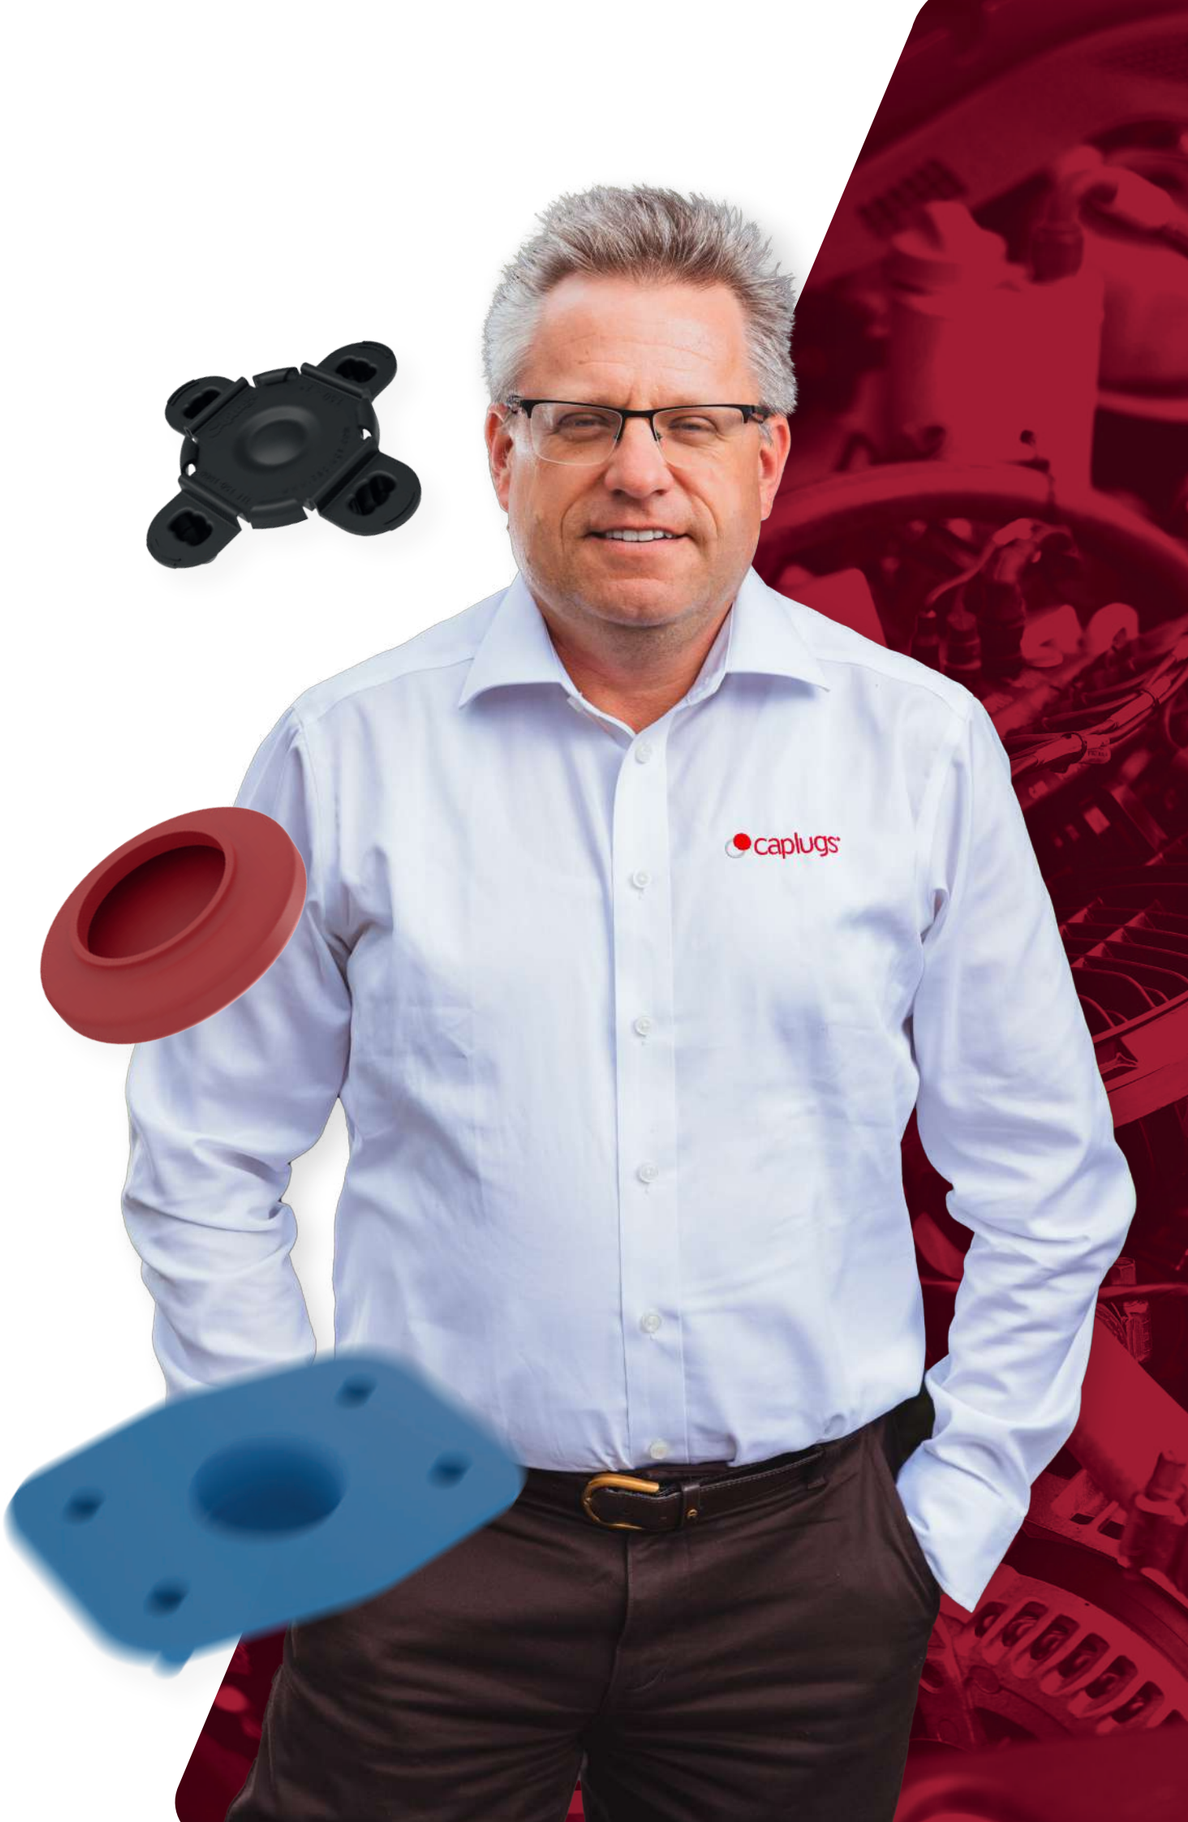

SAE Series

Flanges

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Centred Flange

The SAE Series flange protector ensures hydraulic flanges stay in optimal condition during transport, handling, and storage. Specialised and highly resilient design features a simple insertion mechanism for a snug fit to exclude dust and moisture effectively. The operating temperature range enables consistent protection even in extremes of climate.

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 79°**C** / 175°**F**

***Blue fits SAE code 61 (3000 PSI) and Red fits Code 62 (6000 PSI)**

Red (-**RD**)
RAL 3024



Blue (-**BL**)
RAL 5015

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	SAE J518 Code	Flange pressure in PSI	Nominal flange size	Colour	Dimensions in mm A Centres	Dimensions in mm B Centres	Packaging Carton quantity	Packaging Mini pack quantity
44115881	CODE 61 1/2"	3000	1/2"	Blue	17.53	38.10	2000	400
44145091	CODE 61 3/4"	3000	3/4"	Blue	22.35	47.75	1000	200
44147521	CODE 61 1"	3000	1"	Blue	26.16	52.32	1000	200
44221411	CODE 61 1-1/4"	3000	1-1/4"	Blue	30.23	58.67	700	140
44312011	CODE 61 1-1/2"	3000	1-1/2"	Blue	35.81	69.85	450	90
44326781	CODE 61 2"	3000	2"	Blue	42.93	77.72	400	80
44450021	CODE 62 1/2"	6000	1/2"	Red	18.29	40.39	2000	400
44497031	CODE 62 3/4"	6000	3/4"	Red	23.88	50.80	1000	200
44615411	CODE 62 1"	6000	1"	Red	27.69	57.15	700	140
44665761	CODE 62 1-1/4"	6000	1-1/4"	Red	31.75	66.80	500	100
44813171	CODE 62 1-1/2"	6000	1-1/2"	Red	36.58	79.50	400	80
44913621	CODE 62 2"	6000	2"	Red	44.45	96.77	250	50

Part Number	SAE J518 Code	Flange pressure in PSI	Nominal flange size	Colour	A Centres	B Centres	Carton quantity	Mini pack quantity
					Dimensions in mm		Packaging	

9001
ISO certification

16949
IATF certification

SAE Series

Flanges

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88



*For more information visit our website: **www.caplugs.eu**

Part Number	SAE J518 Code	Flange pressure in PSI	Nominal flange size	Colour	Dimensions in inches A Centres	Dimensions in inches B Centres	Packaging Carton quantity	Packaging Mini pack quantity
44115881	CODE 61 1/2"	3000	1/2"	Blue	0.690	1.500	2000	400
44145091	CODE 61 3/4"	3000	3/4"	Blue	0.880	1.880	1000	200
44147521	CODE 61 1"	3000	1"	Blue	1.030	2.060	1000	200
44221411	CODE 61 1-1/4"	3000	1-1/4"	Blue	1.190	2.310	700	140
44312011	CODE 61 1-1/2"	3000	1-1/2"	Blue	1.410	2.750	450	90
44326781	CODE 61 2"	3000	2"	Blue	1.690	3.060	400	80
44450021	CODE 62 1/2"	6000	1/2"	Red	0.720	1.590	2000	400
44497031	CODE 62 3/4"	6000	3/4"	Red	0.940	2.000	1000	200
44615411	CODE 62 1"	6000	1"	Red	1.090	2.250	700	140
44665761	CODE 62 1-1/4"	6000	1-1/4"	Red	1.250	2.630	500	100
44813171	CODE 62 1-1/2"	6000	1-1/2"	Red	1.440	3.130	400	80
44913621	CODE 62 2"	6000	2"	Red	1.750	3.810	250	50

Part Number	SAE J518 Code	Flange pressure in PSI	Nominal flange size	Colour	A Centres	B Centres	Carton quantity	Mini pack quantity
					Dimensions in inches		Packaging	

9001
ISO certification

16949
IATF certification

VF Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Flexible Flange Cap

The VF Series flange protector seals against dust and moisture in transportation, for optimal product condition. The highly flexible construction material enables quick and easy application, with options to suit flange types including beaded tube and flanged. The service temperature range and durability ensure a consistent and reliable performance.

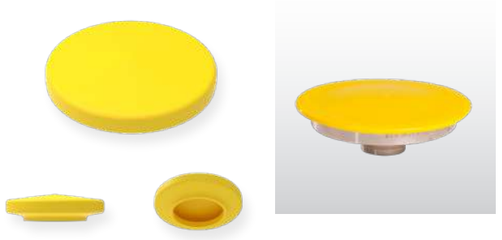

Material: Poly Vinyl Chloride (PVC)
Temperature Resistance: 176°**C** / 350°**F**

***This product can be custom printed with your logo**

Also available in: White (-**WT**) RAL 9016

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging	
	d	d1	h	d	d1	h		
	Main Diameter	Diameter of Opening	Height of main diameter	Main Diameter	Diameter of Opening	Height of main diameter	Carton quantity	Mini pack quantity
37116341	33.27	17.27	3.18	1.310	0.680	0.125	2000	400
37137751	39.37	23.62	3.18	1.550	0.930	0.125	1500	300
37158081	41.14	25.40	3.18	1.620	1.000	0.125	1500	300
37167811	49.02	33.27	3.18	1.930	1.310	0.125	1000	200
37221341	55.75	38.10	3.18	2.195	1.500	0.125	900	180
37278351	68.45	50.80	3.18	2.695	2.000	0.125	600	120
37280011	72.64	55.37	3.18	2.860	2.180	0.125	500	100
37283251	80.77	63.50	3.18	3.180	2.500	0.125	400	80
37302731	90.42	74.42	3.18	3.560	2.930	0.125	400	80
37307191	91.44	76.20	3.18	3.600	3.000	0.125	400	80
37604931	105.53	88.90	3.18	4.155	3.500	0.125	300	60
37617401	119.12	101.60	3.18	4.690	4.000	0.125	250	50
37642281	125.47	107.95	3.18	4.940	4.250	0.125	200	40
37676441	131.82	114.30	3.18	5.190	4.500	0.125	200	40
37722661	138.17	120.65	3.18	5.440	4.750	0.125	200	40
37758771	144.52	127.00	3.18	5.690	5.000	0.125	100	20
Part Number	d	d1	h	d	d1	h	Carton quantity	Mini pack quantity
	Main Diameter	Diameter of Opening	Height of main diameter	Main Diameter	Diameter of Opening	Height of main diameter		
	Dimensions in mm			Dimensions in inches			Packaging	

9001
ISO certification

16949
IATF certification

VF Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging	
	d	d1	h	d	d1	h		
	Main Diameter	Diameter of Opening	Height of main diameter	Main Diameter	Diameter of Opening	Height of main diameter	Carton quantity	Mini pack quantity
37882781	150.87	133.35	3.18	5.940	5.250	0.125	100	20
37923691	157.22	139.70	3.18	6.190	5.500	0.125	100	20
37929721	169.92	152.40	3.18	6.690	6.000	0.125	100	20
37964431	182.62	165.10	3.18	7.190	6.500	0.125	100	20
Part Number	d	d1	h	d	d1	h	Carton quantity	Mini pack quantity
	Main Diameter	Diameter of Opening	Height of main diameter	Main Diameter	Diameter of Opening	Height of main diameter		
	Dimensions in mm			Dimensions in inches			Packaging	





9001
ISO certification

16949
IATF certification

VSR Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Snap Ring Cap

The VSR Series is designed to provide a high level of protection against external elements during shipping and handling. The snap-on design is quick and easy to apply and stays firmly in place throughout the transportation process. Consistent sealing, cleanliness, and preservation of flange integrity are assured, even in challenging environments.

Material: Poly Vinyl Chloride (PVC)
Temperature Resistance: 176°**C** / 350°**F**

***This product can be custom printed with your logo**

Also available in: White (-**WT**) RAL 9016

Yellow (-**YL**) RAL 1021

Red (-**RD**) RAL 3000

Blue (-**BL**) RAL 5017

Grey (-**GY**) RAL 7036

Green (-**GN**) RAL 6032

Orange (-**OR**) RAL 2003

Black (-**BK**) RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging	
	d	d1	h	d	d1	h		
	Main diameter	Diameter of opening	Height of main diameter	Main diameter	Diameter of opening	Height of main diameter	Carton quantity	Mini pack quantity
37153321	19.05	16.51	5.08	0.750	0.650	0.200	1000	
37168501	25.40	22.10	9.53	1.000	0.870	0.375	1000	200
37195651	29.21	26.67	12.83	1.150	1.050	0.505	1000	200
37199821	31.75	29.21	12.83	1.250	1.150	0.505	1000	200
37204161	39.37	36.83	10.92	1.550	1.450	0.430	1000	200
37214661	45.72	41.91	12.83	1.800	1.650	0.505	1000	200
37221881	45.72	43.18	11.43	1.800	1.700	0.450	1000	200
37229431	52.07	49.53	11.43	2.050	1.950	0.450	1000	200
37231381	54.61	52.07	12.70	2.150	2.050	0.500	500	100
37279971	57.91	54.61	11.43	2.280	2.150	0.450	500	100
37289431	66.55	60.96	11.43	2.620	2.400	0.450	500	100
37301951	71.12	67.31	11.43	2.800	2.650	0.450	500	100
37317491	77.47	72.39	11.43	3.050	2.850	0.450	250	
37322291	83.82	80.01	11.43	3.300	3.150	0.450	250	
37326911	91.44	86.36	11.43	3.600	3.400	0.450	250	
37335191	97.79	92.71	12.70	3.850	3.650	0.500	250	50
37341461	103.63	99.06	12.70	4.080	3.900	0.500	250	
37367051	109.73	105.41	13.97	4.320	4.150	0.550	250	50
37369961	116.84	111.76	13.97	4.600	4.400	0.550	250	
37432101	123.19	118.11	12.70	4.850	4.650	0.500	250	
37443331	129.54	124.46	15.24	5.100	4.900	0.600	200	

9001
ISO certification

16949
IATF certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

VSR Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm			Dimensions in inches			Packaging	
	d	d1	h	d	d1	h		
	Main diameter	Diameter of opening	Height of main diameter	Main diameter	Diameter of opening	Height of main diameter	Carton quantity	Mini pack quantity
37447571	135.89	130.81	15.24	5.350	5.150	0.600	200	
37449991	142.75	137.16	15.24	5.620	5.400	0.600	150	
37497241	148.59	144.78	15.24	5.850	5.700	0.600	150	
37504741	156.97	149.86	15.24	6.180	5.900	0.600	150	
37538001	162.56	156.97	15.24	6.400	6.180	0.600	150	
37559531	168.91	163.83	15.24	6.650	6.450	0.600	100	
37567101	175.26	170.18	15.24	6.900	6.700	0.600	100	
37567881	181.61	176.53	15.24	7.150	6.950	0.600	100	
37583071	187.96	182.88	15.24	7.400	7.200	0.600	100	
37594181	194.31	189.23	15.24	7.650	7.450	0.600	100	
37602471	200.66	195.58	15.24	7.900	7.700	0.600	75	
37608581	207.01	201.93	15.24	8.150	7.950	0.600	75	
37617441	214.63	209.55	15.24	8.450	8.250	0.600	75	
37638941	220.98	214.63	15.24	8.700	8.450	0.600	75	
37644821	223.52	218.44	15.24	8.800	8.600	0.600	75	
37652921	228.60	223.52	15.75	9.000	8.800	0.620	75	
37674951	242.57	237.49	15.24	9.550	9.350	0.600	50	
37706671	255.27	246.38	15.24	10.050	9.700	0.600	50	
37725111	255.27	251.46	15.24	10.050	9.900	0.600	50	
37744071	261.62	256.54	15.24	10.300	10.100	0.600	40	
37751851	270.51	264.16	15.24	10.650	10.400	0.600	30	
37753241	280.67	276.86	15.24	11.050	10.900	0.600	30	
37770621	290.07	281.94	12.70	11.420	11.100	0.500	30	
37817951	304.80	299.72	16.51	12.000	11.800	0.650	30	
37822411	313.69	308.61	16.51	12.350	12.150	0.650	20	
37838081	349.25	342.90	16.51	13.750	13.500	0.650	20	
37848241	374.65	368.30	16.51	14.750	14.500	0.650	10	

Part Number	d	d1	h	d	d1	h	Carton quantity	Mini pack quantity
	Main diameter	Diameter of opening	Height of main diameter	Main diameter	Diameter of opening	Height of main diameter		
	Dimensions in mm			Dimensions in inches			Packaging	



9001
ISO certification

16949
IATF certification

caplugs

Our engineering experts are ready to help you with fully customised solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

K Flange Series

Non-Threaded Caps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Precision Fitting Cap

The K Flange Series cover is engineered to ensure precise fitting for protection against contaminants such as dust, dirt, and moisture. Offering great versatility with several variants, the cover is quick and easy to apply and remove for greater convenience and efficiency. Durable resistance to impact, abrasion and potential corrosion is built-in.



Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 66°**C** / 150°**F**

***Can be used for 3000 and 6000 psi flanges.**

Red (-**RD**)
RAL 3000

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	To fit flanges		Dimensions in mm			Dimensions in inches			Packaging
	Pressure class (lbs)	Nominal pipe size in inches	d Inside diameter	h Inside height	D Outside diameter	d Inside diameter	h Inside height	D Outside diameter	Quanitity per Bag
44224414	3000	1/2"	30,30	10,20	32,10	1,193	0,402	1,264	1000
44377024	3000	3/4"	38,20	10,20	40,00	1,504	0,402	1,575	1000
44378614	3000	1"	44,60	11,50	46,40	1,756	0,453	1,827	1000
44453484	3000	1 1/4"	50,90	11,50	52,70	2,004	0,453	2,075	1000
44541064	3000	1 1/2"	60,40	11,50	62,20	2,378	0,453	2,449	1000
44560154	3000	2"	71,50	13,00	73,30	2,815	0,512	2,886	500
44588434	3000	2 1/2"	83,60	13,30	86,50	3,291	0,524	3,406	100
44610644	3000	3"	101,00	13,50	104,50	3,976	0,531	4,114	100
44618584	3000	3 1/2"	113,50	15,60	116,90	4,469	0,614	4,602	100
44632994	3000	4"	126,00	15,80	130,50	4,961	0,622	5,138	100
44670584	3000	5"	152,00	16,00	156,00	5,984	0,630	6,142	100
44692244	6000	1/2"	31,90	11,30	33,70	1,256	0,445	1,327	1000
44747664	6000	3/4"	41,40	12,30	43,20	1,630	0,484	1,701	1000
44792494	6000	1"	47,70	13,00	49,50	1,878	0,512	1,949	1000
44831474	6000	1 1/4"	54,10	13,80	55,90	2,130	0,543	2,201	500
44844114	6000	1 1/2"	63,60	16,10	65,60	2,504	0,634	2,583	500
44868894	6000	2"	79,70	16,10	81,50	3,138	0,634	3,209	500

Part Number	Pressure class (lbs)	Nominal pipe size in inches	d Inside diameter	h Inside height	D Outside diameter	d Inside diameter	h Inside height	D Outside diameter	Quanitity per Bag
	To fit flanges		Dimensions in mm			Dimensions in inches			Packaging

9001
ISO certification

14001
ISO certification

50001
ISO certification

16949
IATF certification

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

Custom Pipe, Flange & Thread Protection

When standard solutions aren't enough, Caplugs delivers custom protection for your most demanding components.

Our engineers collaborate with you to create a solution tailored to your specific requirements. Whether it's a modification to an existing catalogue part or a completely new design, we take the time to understand your application, material requirements, and environmental considerations.

From initial concept and design through tooling and full-volume production, we act as your partner in product protection and ensuring the right solution every step of the way.

Explore our advanced manufacturing processes, learn more about our custom design workflow, or contact us today for a quote.

TLF Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Hinged Plug

The TLF Series toggle lock flange protector features an advanced, patented, and versatile design, incorporating four hinged plugs to be individually pressed into bolt holes. This enables faster and easier fitting than with traditional flange covers for streamlined installation. A thick built-in pad guards against transportation and storage damage.



Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 79°**C** / 175°**F**

***Multiple plugs to suit flange size**

Blue (-**BL**)
RAL 5015

Red (-**RD**)
RAL 3000

Black (-**BK**)
RAL 9017

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website:
www.caplugs.eu

Part Number	To fit Flanges			Packaging	
	Pressure class (lbs)	Nominal pipe size in Inches	API Nominal flange size	Carton quantity	Mini pack quantity
44117271	150	1/2		800	160
44163871	150	3/4		700	140
44203441	150	1		600	120
44211231	150	1-1/4		500	100
44217401	150	1-1/2		400	80
44228431	150	2		300	60
44231101	150	2-1/2		200	40
44237611	150	3		200	40
44240481	150	3-1/2		150	30
44245161	150	4		150	30
44246451	150	6		100	20
44259101	150	8		30	6
44259121	150	10		30	6
44291161	150	12		40	8
44292611	150	14		25	5
44323621	300/400/600	1/2		700	140
44375411	300/400/600	3/4		500	100
44383841	300/400/600	1		400	80
44392621	300/400/600	1-1/4		300	60
44402441	300/400/600	1-1/2		250	50
44415531	300/400/600	2		200	40
44430691	300/400/600	2-1/2	1-13/16" 10000 #	150	30
44437021	300/400/600	3		125	25

9001
ISO certification

16949
IATF certification

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

TLF Series

Non-Threaded Plugs

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website:
www.caplugs.eu

Part Number	To fit Flanges			Packaging	
	Pressure class (lbs)	Nominal pipe size in Inches	API Nominal flange size	Carton quantity	Mini pack quantity
44453141	300	3-1/2		100	20
44462111	300	4		80	16
44484281	300	6		50	10
44511981	300	8		30	6
44553601	300	10		30	6
44554211	300	12		40	8
44556041	300	14		50	10
44558101	600	4	4-1/16" 2000 #	100	20
44569761	600	6	7-1/16" 2000 #	30	6
44591511	600	8	9" 2000 #	30	6
44598511	600	10	11" 2000 #	30	6
44615191	600	12	13-5/8" 2000 #	50	10
44636771	900/1500	2	2-1/16" 3000 #	100	20
44644711	900	3	3-1/8" 3000 #	75	15
44655781	900	4	4-1/16" 3000 #	50	10
44655941	900	6	7-1/16" 3000 #	30	6
44663751	1500	2-1/2	2-9/16" 5000 #	80	16
44667751	1500	3	3-1/8" 5000 #	50	10
44679431	1500	4	4-1/16" 5000 #	50	10
44701311	1500	6	7-1/16" 5000 #	25	5
44723151	10000	2-1/16	2-1/16" 10000 #	125	25
44729101	2500	2		100	20
44731231	2500	3		50	10

Part Number	Pressure class (lbs)	Nominal pipe size in Inches	API Nominal flange size	Carton quantity	Mini pack quantity
	To fit Flanges			Packaging	





9001
ISO certification

16949
IATF certification

Our engineering experts are ready to help you with fully customised solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

Spirals

When Hydraulic Systems Protection Is Critical

Caplugs spiral protection products are designed to safeguard cables, wires, and hoses from abrasion,entanglement, and environmental damage. The design coils around the exterior of cables and hoses, providing a robust safeguarding layer that extends the lifespan of these crucial components.

Spiral solutions provide flexible yet durable resistance to movement, vibration, and harsh environmental conditions. Built-in ability to bend and conform to cable and hose movements ensures continuous protection without limiting functionality.

Ease of handling and efficient working are facilitated by straightforward installation and adjustment. Each spiral can be cut to length and fitted without disconnecting protected components from their systems. This convenient approach maximises uptime while reducing hazards and optimising operator safety in industries that include automation and robotics, and heavy machinery operations.

More details about these products on our website

Safeplast joined the Caplugs family in 2022. The Tampere facility remains the centre of excellence for all hose protection and has been recently expanded with Havel machinery and product lines. Ensuring quality, the name you can trust, hose protection experts and a customer-centric service team.

SAFEPLAST

Safe-Spiral Series

Spirals

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Contoured Hose Wrap

The Safe-Spiral Series hose wrap ensures a flexible, durable fit with hydraulic and pneumatic hoses. Mechanical stress protection adapts to expansion or pressure change, without slipping or gaping. Precision-engineered spacing dissipates heat, for optimal operating temperature and hose degradation avoidance. On-site application is highly practical.

Material: High Density Polyethylene (HDPE), UV-tolerant
Temperature Resistance: 80°C / 176°F
Temperature range: -55°C - +80°C
***Can be cut to custom lengths**

Black (-**BK**)
RAL 9017

Yellow (-**YL**)
RAL 1023

Red (-**RD**)
RAL 3028

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



Other colors available on request, minimum order quantities apply *For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm							Packaging
	Recommended for hose diameters in this range	D Outside diameter	d Inside diameter	H Hole diameter	P Pitch	W Wall thickness	Weight Kg / m	L Length of coil in metres
25183375	9- 13	12.00	9.60		10.00	1.20	0.04	50
25217145	13- 18	16.00	13.40		12.00	1.30	0.06	50
25380175	16- 22	20.00	16.00	7.00	20.00	2.00	0.09	25
25387855	20- 27	25.00	20.60	7.00	21.00	2.20	0.15	25
25447295	27- 36	32.00	27.00	7.00	22.00	2.50	0.19	25
25551855	34- 44	40.00	34.60	7.00	24.00	2.70	0.30	25
25582785	43- 55	50.00	43.20	10.00	30.00	3.40	0.40	25
25638945	55- 67	63.00	55.60	10.00	37.00	3.70	0.65	25
25649515	66- 80	75.00	66.20	10.00	42.00	4.40	0.73	20
25654785	80- 98	90.00	80.20	10.00	45.00	4.90	1.20	15
25746935	99- 115	110.00	99.00	10.00	50.00	5.50	1.76	10
25758665	113- 130	125.00	113.20	10.00	52.00	5.90	2.05	8
25781735	125- 155	140.00	127.00	10.00	55.00	6.50	2.50	6

Part Number	Recommended for hose diameters in this range	D Outside diameter	d Inside diameter	H Hole diameter	P Pitch	W Wall thickness	Weight Kg / m	L Length of coil in metres
	Dimensions in mm							Packaging

9001
ISO certification

14001
ISO certification

Safe-Spiral Series

Spirals

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Other colors available on request, minimum order quantities apply *For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in imperial							Packaging
	Recommended for hose diameters in this range	D Outside diameter	d Inside diameter	H Hole diameter	P Pitch	W Wall thickness	Weight lb / ft	L Length of coil in Feet
25183375	0.35- 0.51	0.472	0.378		0.394	0.047	0.027	164
25217145	0.51- 0.71	0.630	0.528		0.472	0.051	0.040	164
25380175	0.62- 0.86	0.787	0.630	0.276	0.787	0.079	0.060	82
25387855	0.78- 1.06	0.984	0.811	0.276	0.827	0.087	0.101	82
25447295	1.06- 1.42	1.260	1.063	0.276	0.866	0.098	0.128	82
25551855	1.34- 1.73	1.575	1.362	0.276	0.945	0.106	0.202	82
25582785	1.69- 2.16	1.969	1.701	0.276	1.181	0.134	0.269	82
25638945	2.16- 2.64	2.480	2.189	0.394	1.457	0.146	0.437	82
25649515	2.60- 3.15	2.953	2.606	0.394	1.654	0.173	0.491	66
25654785	3.15- 3.86	3.543	3.157	0.394	1.772	0.193	0.806	49
25746935	3.90- 4.53	4.331	3.898	0.394	1.969	0.217	1.183	33
25758665	4.45- 5.12	4.921	4.457	0.394	2.047	0.232	1.378	26
25781735	4.92- 6.10	5.512	5.000	0.394	2.165	0.256	1.680	20

Part Number	Recommended for hose diameters in this range	D Outside diameter	d Inside diameter	H Hole diameter	P Pitch	W Wall thickness	Weight lb / ft	L Length of coil in Feet
	Dimensions in imperial							Packaging



9001
ISO certification

14001
ISO certification

Safe-Spiral DUO Series

Spirals

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Dual Wrapping Spiral

The Safe-Spiral DUO Series protector resists external impacts and fine particulate ingress, while flexibly accommodating movement to avoid impeding fluid flow. Distinctive dual wrapping design enables visual recognition of protected hoses, even in complex assemblies. Rapid identification streamlines inspection and maintenance and enhances safety.

Material: High Density Polyethylene (HDPE), UV-tolerant
Temperature Resistance: 80°**C** / 176°**F**

Yellow (-**YL**)
RAL 1023

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

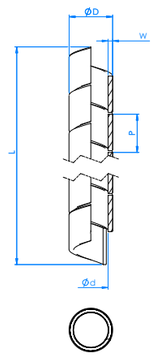

Other colors available on request, minimum order quantities apply *For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm						Packaging
	Recommended for hose diameters in this range	D	d	P	W	Weight	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	Kg / m	Length of coil in metres
26109725	13- 18	16.00	13.40	12.00	1.30	0.06	25
26204915	16- 22	20.00	16.00	20.00	2.00	0.09	25
26224895	20- 27	25.00	20.60	21.00	2.20	0.15	25
26305765	27- 36	32.00	27.00	22.00	2.50	0.19	25
26349785	34- 44	40.00	34.60	24.00	2.70	0.30	25
26380895	43- 55	50.00	43.20	30.00	3.40	0.40	25
26546435	55- 67	63.00	55.60	37.00	3.70	0.65	25
26597565	66- 80	75.00	66.20	42.00	4.40	0.73	20
26678615	80- 98	90.00	80.20	45.00	4.90	1.20	15
26690415	99- 115	110.00	99.00	50.00	5.50	1.76	10
Part Number	Recommended for hose diameters in this range	D	d	P	W	Weight	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	Kg / m	Length of coil in metres
		Dimensions in mm					Packaging

9001
ISO certification

14001
ISO certification

Other colors available on request, minimum order quantities apply *For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in imperial						Packaging
	Recommended for hose diameters in this range	D	d	P	W	Weight	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	lb / ft	Length of coil in Feet
26109725	0.51- 0.71	0.630	0.528	0.472	0.051	0.040	82
26204915	0.62- 0.86	0.787	0.630	0.787	0.079	0.060	82
26224895	0.78- 1.06	0.984	0.811	0.827	0.087	0.101	82
26305765	1.06- 1.42	1.260	1.063	0.866	0.098	0.128	82
26349785	1.34- 1.73	1.575	1.362	0.945	0.106	0.202	82
26380895	1.69- 2.16	1.969	1.701	1.181	0.134	0.269	82
26546435	2.16- 2.64	2.480	2.189	1.457	0.146	0.437	82
26597565	2.60- 3.15	2.953	2.606	1.654	0.173	0.491	66
26678615	3.15- 3.86	3.543	3.157	1.772	0.193	0.806	49
26690415	3.90- 4.53	4.331	3.898	1.969	0.217	1.183	33
Part Number	Recommended for hose diameters in this range	D	d	P	W	Weight	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	lb / ft	Length of coil in Feet
		Dimensions in imperial					Packaging

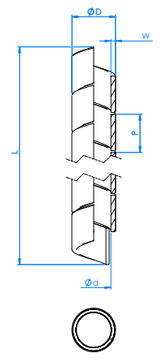

9001
ISO certification

14001
ISO certification

Safe-Spiral BIO Series

Spirals

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Reduced Environmental Footprint Spiral

The Safe-Spiral BIO Series protector is manufactured to reduce environmental impact while providing a high-precision fit. The design enables robust yet flexible guarding from industrial-level abrasion, minimising wear and leakage risk and maintaining hydraulic system integrity. Efficient application is achieved easily, even to hoses in active use.

Material: High Density Polyethylene (HDPE) and Sugarcane (SO)
Temperature Resistance: 80°**C** / 176°**F**
Temperature range: -55°**C** - +80°**C**
***Can also be used as a wear indicator spiral**

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

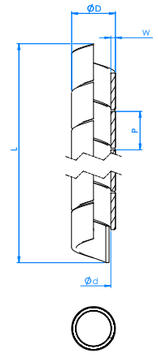

Other colors available on request, minimum order quantities apply — *For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm						Packaging
	Recommended for hose diameters in this range	D	d	P	W	Weight	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	Kg / m	Length of coil in metres
25104355	13- 18	16.00	13.40	12.00	1.30	0.06	25
25185285	16- 22	20.00	16.00	20.00	2.00	0.11	25
25263315	20- 27	25.00	20.60	21.00	2.20	0.17	25
25287005	27- 36	32.00	27.00	22.00	2.50	0.23	25
25354975	34- 44	40.00	34.60	24.00	2.70	0.29	25
25441115	43- 55	50.00	43.20	30.00	3.40	0.41	25
25538945	55- 67	63.00	55.60	37.00	3.70	0.55	25
25572015	66- 80	75.00	66.20	42.00	4.40	0.88	20
25584365	80- 98	90.00	80.20	45.00	4.90	1.20	15
25592005	99- 115	110.00	99.00	50.00	5.50	1.61	10

Part Number	Recommended for hose diameters in this range	D	d	P	W	Weight	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	Kg / m	Length of coil in metres
		Dimensions in mm					Packaging

9001
ISO certification

14001
ISO certification

Safe-Spiral BIO Series

Spirals

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Other colors available on request, minimum order quantities apply — *For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in imperial						Packaging
	Recommended for hose diameters in this range	D	d	P	W	Weight	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	lb / ft	Length of coil in Feet
25104355	0.51- 0.71	0.630	0.528	0.472	0.051	0.040	82
25185285	0.51- 0.71	0.787	0.630	0.787	0.079	0.074	82
25263315	0.78- 1.06	0.984	0.811	0.827	0.087	0.114	82
25287005	1.06- 1.42	1.260	1.063	0.866	0.098	0.155	82
25354975	1.34- 1.73	1.575	1.362	0.945	0.106	0.195	82
25441115	1.69- 2.16	1.969	1.701	1.181	0.134	0.276	82
25538945	2.16- 2.64	2.480	2.189	1.457	0.146	0.370	82
25572015	2.60- 3.15	2.953	2.606	1.654	0.173	0.591	66
25584365	3.15- 3.86	3.543	3.157	1.772	0.193	0.806	49
25592005	3.90- 4.53	4.331	3.898	1.969	0.217	1.082	33

Part Number	Recommended for hose diameters in this range	D	d	P	W	Weight	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	lb / ft	Length of coil in Feet
		Dimensions in imperial					Packaging

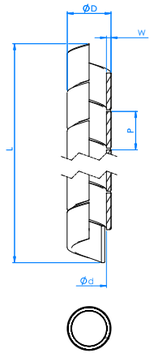

9001
ISO certification

14001
ISO certification

Safe-Spiral ECO Series

Spirals

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Recycled Spiral

The Safe-Spiral ECO Series spiral is of recycled construction, robustly shielding from regular mechanical stress. Continuous coiling onto the hose enables easy application and inspection with no system disassembly. Flexibility allows slipping and bunching-free hose movement without wear point abrasion for uninterrupted hydraulic fluid transfer.

Material: High Density Polyethylene (HDPE)
Temperature Resistance: 80°**C** / 176°**F**
Temperature range: -40°**C** - +80°**C**

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm						Packaging
	Recommended for hose diameters in this range	D	d	P	W	Weight	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	Kg / m	Length of coil in metres
25210325	9- 13	12.00	9.60	10.00	1.20	0.03	50
25273625	13- 18	16.00	13.40	12.00	1.30	0.05	50
25385415	16- 22	20.00	16.00	20.00	2.00	0.11	25
25491905	20- 27	25.00	20.60	21.00	2.20	0.17	25
25499915	27- 36	32.00	27.00	22.00	2.50	0.23	25
25543275	34- 44	40.00	34.60	24.00	2.70	0.29	25
25563395	43- 55	50.00	43.20	30.00	3.40	0.41	25
25575095	55- 67	63.00	55.60	37.00	3.70	0.55	25
25583795	66- 80	75.00	66.20	42.00	4.40	0.87	20
25641115	80- 98	90.00	80.20	45.00	4.90	1.20	15
25755515	99- 115	110.00	99.00	50.00	5.50	1.61	10

Part Number	Recommended for hose diameters in this range	D	d	P	W	Weight	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	Kg / m	Length of coil in metres
	Dimensions in mm						Packaging

9001
ISO certification

14001
ISO certification

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in imperial						Packaging
	Recommended for hose diameters in this range	D	d	P	W	Weight	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	lb / ft	Length of coil in Feet
25210325	0.35- 0.51	0.472	0.378	0.394	0.047	0.020	164
25273625	0.51- 0.71	0.630	0.528	0.472	0.051	0.034	164
25385415	0.51- 0.71	0.787	0.630	0.787	0.079	0.074	82
25491905	0.78- 1.06	0.984	0.811	0.827	0.087	0.114	82
25499915	1.06- 1.42	1.260	1.063	0.866	0.098	0.155	82
25543275	1.34- 1.73	1.575	1.362	0.945	0.106	0.195	82
25563395	1.69- 2.16	1.969	1.701	1.181	0.134	0.276	82
25575095	2.16- 2.64	2.480	2.189	1.457	0.146	0.370	82
25583795	2.60- 3.15	2.953	2.606	1.654	0.173	0.585	66
25641115	3.15- 3.86	3.543	3.157	1.772	0.193	0.806	49
25755515	3.90- 4.53	4.331	3.898	1.969	0.217	1.082	33

Part Number	Recommended for hose diameters in this range	D	d	P	W	Weight	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	lb / ft	Length of coil in Feet
	Dimensions in imperial						Packaging

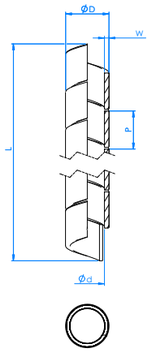

9001
ISO certification

14001
ISO certification

Safe-Spiral ABRA Series

Spirals

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Wear Indicator Spiral

The Safe-Spiral ABRA Series protector combines heavy-duty abrasion resistance with flexible hose functionality. If worn away the exterior surface indicator reveals the protector's core, prompting timely wrap replacement for ongoing hose integrity. Construction is highly durable while application and removal are easy without hose set-up disassembly.

Material: High Density Polyethylene (HDPE)
Temperature Resistance: 80°**C** / 176°**F**
Temperature Range: -55°**C** - +80°**C**

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm						Packaging
	Recommended for hose diameters in this range	D Outside diameter	d Inside diameter	P Pitch	W Wall thickness	Weight Kg / m	L Length of coil in metres
26154715	13- 18	16.00	13.40	12.00	1.30	0.06	25
26196315	16- 22	20.00	16.00	20.00	2.00	0.09	25
26258875	20- 27	25.00	20.60	21.00	2.20	0.15	25
26303345	27- 36	32.00	27.00	22.00	2.50	0.19	25
26370585	34- 44	40.00	34.60	24.00	2.70	0.30	25
26509555	43- 55	50.00	43.20	30.00	3.40	0.40	25
26510435	55- 67	63.00	55.60	37.00	3.70	0.65	25
26608525	66- 80	75.00	66.20	42.00	4.40	0.73	20
26646195	80- 98	90.00	80.20	45.00	4.90	1.20	15
26666585	99- 115	110.00	99.00	50.00	5.50	1.76	10
Part Number	Recommended for hose diameters in this range	D Outside diameter	d Inside diameter	P Pitch	W Wall thickness	Weight Kg / m	L Length of coil in metres
	Dimensions in mm						Packaging

9001
ISO certification

14001
ISO certification

Safe-Spiral ABRA Series

Spirals

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in imperial						Packaging
	Recommended for hose diameters in this range	D Outside diameter	d Inside diameter	P Pitch	W Wall thickness	Weight lb / ft	L Length of coil in Feet
26154715	0.51- 0.71	0.630	0.528	0.472	0.051	0.040	82
26196315	0.51- 0.71	0.787	0.630	0.787	0.079	0.060	82
26258875	0.78- 1.06	0.984	0.811	0.827	0.087	0.101	82
26303345	1.06- 1.42	1.260	1.063	0.866	0.098	0.128	82
26370585	1.34- 1.73	1.575	1.362	0.945	0.106	0.202	82
26509555	1.69- 2.16	1.969	1.701	1.181	0.134	0.269	82
26510435	2.16- 2.64	2.480	2.189	1.457	0.146	0.437	82
26608525	2.60- 3.15	2.953	2.606	1.654	0.173	0.491	66
26646195	3.15- 3.86	3.543	3.157	1.772	0.193	0.806	49
26666585	3.90- 4.53	4.331	3.898	1.969	0.217	1.183	33
Part Number	Recommended for hose diameters in this range	D Outside diameter	d Inside diameter	P Pitch	W Wall thickness	Weight lb / ft	L Length of coil in Feet
	Dimensions in imperial						Packaging



9001
ISO certification

14001
ISO certification

Safe-Spiral ASTA Series

Spirals

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Electrostatic Charge Dissipation Spiral

The Safe-Spiral ASTA Series protector has built-in capability to absorb and dissipate electrostatic surface charges, critical to safety in operations where sparking is a risk. Wrapping maintains close contact with no hose flexibility loss, while direct application is achieved without specialised tools. Durable design resists even constant abrasion.

Material: High Density Polyethylene (HDPE), conductive thermoplastic compound

***Meets EN ISO 80079-36:2016**

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

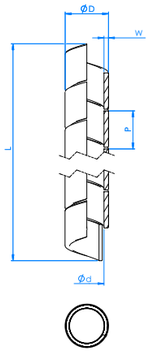

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm						Packaging
	Recommended for hose diameters in this range	D	d	P	W	Weight	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	Kg / m	Length of coil in metres
25146615	16- 22	20.00	16.00	20.00	2.00	0.11	25
25248295	20- 27	25.00	20.60	21.00	2.20	0.17	25
25250585	27- 36	32.00	27.00	22.00	2.50	0.23	25
25264045	34- 44	40.00	34.60	24.00	2.70	0.29	25
25398625	43- 55	50.00	43.20	30.00	3.40	0.41	25
25400255	55- 67	63.00	55.60	37.00	3.70	0.55	25
25427365	66- 80	75.00	66.20	42.00	4.40	0.88	20
25579385	80- 98	90.00	80.20	45.00	4.90	1.20	15
25626455	99- 115	110.00	99.00	50.00	5.50	1.61	10

Part Number	Recommended for hose diameters in this range	D	d	P	W	Weight	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	Kg / m	Length of coil in metres
	Dimensions in mm						Packaging

9001
ISO certification

14001
ISO certification

Safe-Spiral ASTA Series

Spirals

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in imperial						Packaging
	Recommended for hose diameters in this range	D	d	P	W	Weight	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	lb / ft	Length of coil in Feet
25146615	0.51- 0.71	0.787	0.630	0.787	0.079	0.074	82
25248295	0.78- 1.06	0.984	0.811	0.827	0.087	0.114	82
25250585	1.06- 1.42	1.260	1.063	0.866	0.098	0.155	82
25264045	1.34- 1.73	1.575	1.362	0.945	0.106	0.195	82
25398625	1.69- 2.16	1.969	1.701	1.181	0.134	0.276	82
25400255	2.16- 2.64	2.480	2.189	1.457	0.146	0.370	82
25427365	2.60- 3.15	2.953	2.606	1.654	0.173	0.591	66
25579385	3.15- 3.86	3.543	3.157	1.772	0.193	0.806	49
25626455	3.90- 4.53	4.331	3.898	1.969	0.217	1.082	33

Part Number	Recommended for hose diameters in this range	D	d	P	W	Weight	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	lb / ft	Length of coil in Feet
	Dimensions in imperial						Packaging

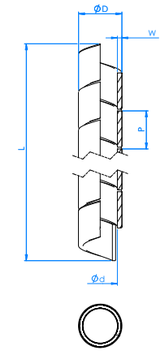

9001
ISO certification

14001
ISO certification

Safe-Spiral MINE+ Series

Spirals

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Extreme Abrasion-Resistant Spiral

The Safe-Spiral MINE+ Series protector is specially designed to withstand extreme abrasion situations, including mining, or other exposures to rock and jagged particles. Secure yet flexible conformity maximises protection from erosion and leakage, while enabling full hose movement and easy inspection. Easy fitting and adjustment minimise downtime.

Material: High Density HDPE Based

***Flame resistant acceptance number MSHA IC-271**

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

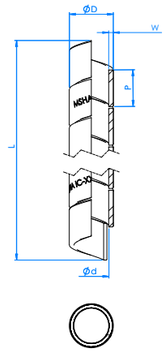

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm						Packaging
	Recommended for hose diameters in this range	D Outside diameter	d Inside diameter	P Pitch	W Wall thickness	Weight Kg / m	L Length of coil in metres
25105455	13- 18	16.00	13.40	12.00	1.30	0.06	25
25370915	16- 22	20.00	16.00	20.00	2.00	0.12	25
25378355	20- 27	25.00	20.60	21.00	2.20	0.17	25
25397675	27- 36	32.00	27.00	22.00	2.50	0.22	25
25561965	34- 44	40.00	34.60	24.00	2.70	0.32	25
25691955	43- 55	50.00	43.20	30.00	3.40	0.55	25
25784415	55- 67	63.00	55.60	37.00	3.70	0.72	25
25796145	66- 80	75.00	66.20	42.00	4.40	0.90	20
25799905	80- 98	90.00	80.20	45.00	4.90	1.09	15
25868885	99- 115	110.00	99.00	50.00	5.50	1.60	10

Part Number	Recommended for hose diameters in this range	D Outside diameter	d Inside diameter	P Pitch	W Wall thickness	Weight Kg / m	L Length of coil in metres
	Dimensions in mm						Packaging

9001
ISO certification

14001
ISO certification

Safe-Spiral MINE+ Series

Spirals

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in imperial						Packaging
	Recommended for hose diameters in this range	D Outside diameter	d Inside diameter	P Pitch	W Wall thickness	Weight lb / ft	L Length of coil in Feet
25105455	0.51- 0.71	0.630	0.528	0.472	0.051	0.040	82
25370915	0.51- 0.71	0.787	0.630	0.787	0.079	0.081	82
25378355	0.78- 1.06	0.984	0.811	0.827	0.087	0.114	82
25397675	1.06- 1.42	1.260	1.063	0.866	0.098	0.148	82
25561965	1.34- 1.73	1.575	1.362	0.945	0.106	0.215	82
25691955	1.69- 2.16	1.969	1.701	1.181	0.134	0.370	82
25784415	2.16- 2.64	2.480	2.189	1.457	0.146	0.484	82
25796145	2.60- 3.15	2.953	2.606	1.654	0.173	0.605	66
25799905	3.15- 3.86	3.543	3.157	1.772	0.193	0.733	49
25868885	3.90- 4.53	4.331	3.898	1.969	0.217	1.075	33

Part Number	Recommended for hose diameters in this range	D Outside diameter	d Inside diameter	P Pitch	W Wall thickness	Weight lb / ft	L Length of coil in Feet
	Dimensions in imperial						Packaging

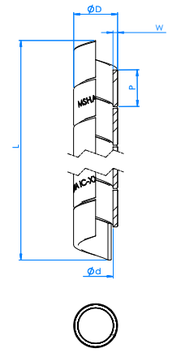

9001
ISO certification

14001
ISO certification

Safe-Spiral 'Your Brand' Series

Spirals

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Laser Custom Branded Spiral

The Safe-Spiral 'Your Brand' Series protector can be laser custom branded. Durable, flexible hose protection from stress including ultraviolet radiation, chemicals and temperature extremes also signals commitment to quality, safety, and brand consistency. Secure fitting is achieved with no extra fastening mechanisms to avoid potential wear points.

Material: High Density Polyethylene (HDPE)
Temperature Resistance: -55°C - +80°C
Temperature range: -55°C - +80°C
***Can be custom printed with your logo.**
***Minimum order quantity 200 meters / size, Available in Black with coloured edges**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

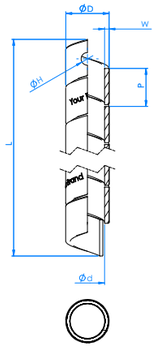

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm							Packaging
	Recommended for hose diameters in this range	D Outside diameter	d Inside diameter	H Hole diameter	P Pitch	W Wall thickness	Weight Kg / m	L Length of coil in metres
27133895	13- 18	16.00	13.40		12.00	1.30	0.06	25
27219865	16- 22	20.00	16.00	7.00	20.00	2.00	0.11	25
27223685	20- 27	25.00	20.60	7.00	21.00	2.20	0.17	25
27300035	27- 36	32.00	27.00	7.00	22.00	2.50	0.23	25
27300185	34- 44	40.00	34.60	7.00	24.00	2.70	0.29	25
27341125	43- 55	50.00	43.20	10.00	30.00	3.40	0.41	25
27358215	55- 67	63.00	55.60	10.00	37.00	3.70	0.55	25
27358945	66- 80	75.00	66.20	10.00	42.00	4.40	0.88	20
27522965	80- 98	90.00	80.20	10.00	45.00	4.90	1.20	15
27632195	99- 115	110.00	99.00	10.00	50.00	5.50	1.61	10
Part Number	Recommended for hose diameters in this range	D Outside diameter	d Inside diameter	H Hole diameter	P Pitch	W Wall thickness	Weight Kg / m	L Length of coil in metres
	Dimensions in mm							Packaging

9001
ISO certification

14001
ISO certification

Safe-Spiral 'Your Brand' Series

Spirals

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in imperial							Packaging
	Recommended for hose diameters in this range	D Outside diameter	d Inside diameter	H Hole diameter	P Pitch	W Wall thickness	Weight lb / ft	L Length of coil in Feet
27133895	0.51- 0.71	0.630	0.528		0.472	0.051	0.040	82
27219865	0.51- 0.71	0.787	0.630	0.276	0.787	0.079	0.074	82
27223685	0.78- 1.06	0.984	0.811	0.276	0.827	0.087	0.114	82
27300035	1.06- 1.42	1.260	1.063	0.276	0.866	0.098	0.155	82
27300185	1.34- 1.73	1.575	1.362	0.276	0.945	0.106	0.195	82
27341125	1.69- 2.16	1.969	1.701	0.394	1.181	0.134	0.276	82
27358215	2.16- 2.64	2.480	2.189	0.394	1.457	0.146	0.370	82
27358945	2.60- 3.15	2.953	2.606	0.394	1.654	0.173	0.591	66
27522965	3.15- 3.86	3.543	3.157	0.394	1.772	0.193	0.806	49
27632195	3.90- 4.53	4.331	3.898	0.394	1.969	0.217	1.082	33
Part Number	Recommended for hose diameters in this range	D Outside diameter	d Inside diameter	H Hole diameter	P Pitch	W Wall thickness	Weight lb / ft	L Length of coil in Feet
	Dimensions in imperial							Packaging

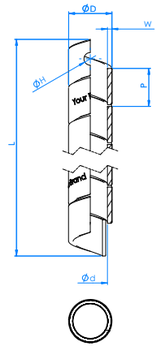

9001
ISO certification

14001
ISO certification

Pig's Tail™ Spiral Series

Spirals

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Pig's Tail Protective Wrapping

The Pig's Tail™ spiral hose wrap provides a robust, flexible surface abrasion barrier, reducing leakage and bursting risk under pressure. The design enables application to installed hoses with no need for disassembly, maximising operational efficiency. Separate hoses can also be secured together to avoid entanglement, strain, and premature failure.

Material: High Density Polyethylene (HDPE)
Temperature Resistance: 80°**C** / 176°**F**

Black (-**BK**)
RAL 9005

Yellow (-**YL**)
RAL 1017

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm						Packaging
	Recommended for hose diameters in this range	D Outside diameter	d Inside diameter	P Pitch	W Wall thickness	Weight Kg / m	L Length of coil in metres
25121905	7- 9	9.00	7.00	6.50	1.00	0.03	20
25135825	9- 13	12.50	9.50	10.00	1.50	0.05	20
25210995	9- 13	12.50	9.50	10.00	1.50	0.05	50
25251345	13- 18	16.00	12.50	12.00	1.75	0.08	20
25259665	13- 18	16.00	12.50	12.00	1.75	0.08	50
25291125	16- 22	20.00	16.00	14.50	2.00	0.11	20
25316675	16- 22	20.00	16.00	14.50	2.00	0.11	50
25317055	20- 27	25.00	21.00	21.00	2.20	0.14	20
25330495	20- 27	25.00	21.00	21.00	2.20	0.14	50
25354235	27- 35	32.00	27.00	24.00	2.50	0.22	20
25377255	27- 35	32.00	27.00	24.00	2.50	0.22	50
25397345	34- 43	40.00	34.00	30.00	3.00	0.28	20
25403365	34- 43	40.00	34.00	30.00	3.00	0.28	50
25448165	43- 54	50.00	44.00	35.00	3.00	0.43	20
25478155	43- 54	50.00	44.00	35.00	3.00	0.43	50
25484205	55- 66	63.00	55.00	40.00	3.50	0.58	20
25498165	65- 80	75.00	66.00	40.00	4.00	0.71	20
25514005	80- 98	90.00	79.00	45.00	4.50	1.08	20
25533095	99- 115	110.00	99.00	55.00	5.50	1.54	12
25548475	113- 130	125.00	114.00	55.00	5.50	1.72	12
25549565	129- 155	140.00	129.00	55.00	5.50	2.09	8
25716775	150- 175	160.00	148.00	60.00	6.00	2.38	6

9001
ISO certification

14001
ISO certification

Pig's Tail™ Spiral Series

Spirals

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in imperial						Packaging
	Recommended for hose diameters in this range	D Outside diameter	d Inside diameter	P Pitch	W Wall thickness	Weight lb / ft	L Length of coil in Feet
25121905	0.28- 0.35	0.354	0.276	0.256	0.039	0.022	66
25135825	0.35- 0.51	0.492	0.374	0.394	0.059	0.031	66
25210995	0.35- 0.51	0.492	0.374	0.394	0.059	0.031	164
25251345	0.51- 0.71	0.630	0.492	0.472	0.069	0.054	66
25259665	0.51- 0.71	0.630	0.492	0.472	0.069	0.054	164
25291125	0.63- 0.87	0.787	0.630	0.571	0.079	0.075	66
25316675	0.63- 0.87	0.787	0.630	0.571	0.079	0.075	164
25317055	0.79- 1.06	0.984	0.827	0.827	0.087	0.091	66
25330495	0.79- 1.06	0.984	0.827	0.827	0.087	0.091	164
25354235	1.06- 1.38	1.260	1.063	0.945	0.098	0.148	66
25377255	1.06- 1.38	1.260	1.063	0.945	0.098	0.148	164
25397345	1.34- 1.69	1.575	1.339	1.181	0.118	0.188	66
25403365	1.34- 1.69	1.575	1.339	1.181	0.118	0.188	164
25448165	1.69- 2.13	1.969	1.732	1.378	0.118	0.288	66
25478155	1.69- 2.13	1.969	1.732	1.378	0.118	0.288	164
25484205	2.17- 2.60	2.480	2.165	1.575	0.138	0.389	66
25498165	2.56- 3.15	2.953	2.598	1.575	0.157	0.479	66
25514005	3.15- 3.86	3.543	3.110	1.772	0.177	0.726	66
25533095	3.90- 4.53	4.331	3.898	2.165	0.217	1.034	39
25548475	4.45- 5.12	4.921	4.488	2.165	0.217	1.155	39
25549565	5.08- 6.10	5.512	5.079	2.165	0.217	1.406	26
25716775	5.91- 6.89	6.299	5.827	2.362	0.236	1.601	20



9001
ISO certification

14001
ISO certification

FRAS Series

Spirals

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Fire Retardant Anti-Static Spiral

The FRAS Series hose wrap is engineered to provide extra protection in high-risk environments, where flame resistance and anti-static properties are critical. Built-in safety factors include self-extinguishing capability in case of fire. Durable, flexible design guards from operational wear and tear and maintains hose integrity and functionality.

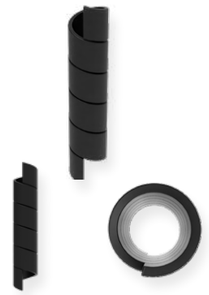

Material: Low Density Polyethylene (LDPE)
Temperature Resistance: 137°**C** / 279°**F**

***Tested to AS 2600, AS 1180.10B, AS 1180.13A, MSHA # IC-264/0 standards**

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm					Packaging
	Recommended for hose diameters in this range	D	d	P	W	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	Length of coil in metres
25102715	10- 17	12.00	10.00	10.00	1.50	50
25114755	12- 22	16.00	11.50	12.00	1.50	20
25151905	16- 27	20.00	14.00	14.50	1.80	20
25342575	22- 35	25.00	20.00	21.00	2.00	20
25358265	27- 43	32.00	25.00	24.00	2.40	20
25463315	33- 55	40.00	32.00	30.00	2.40	20
25465805	42- 64	50.00	38.00	35.00	3.00	20
25508795	52- 75	63.00	50.00	40.00	3.50	20
25539075	65- 97	75.00	60.00	40.00	3.80	20
25558795	80- 109	90.00	72.00	45.00	4.60	20
25599455	97- 124	110.00	87.00	55.00	5.50	12

Part Number	Recommended for hose diameters in this range	D	d	P	W	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	Length of coil in metres
	Dimensions in mm					Packaging

9001
ISO certification

FRAS Series

Spirals

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in imperial					Packaging
	Recommended for hose diameters in this range	D	d	P	W	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	Length of coil in Feet
25102715	0.39- 0.66	0.472	0.394	0.394	0.059	164
25114755	0.47- 0.86	0.630	0.453	0.472	0.059	66
25151905	0.62- 1.06	0.787	0.551	0.571	0.071	66
25342575	0.86- 1.37	0.984	0.787	0.827	0.079	66
25358265	1.06- 1.69	1.260	0.984	0.945	0.094	66
25463315	1.30- 2.17	1.575	1.260	1.181	0.094	66
25465805	1.65- 2.52	1.969	1.496	1.378	0.118	66
25508795	2.05- 2.95	2.480	1.969	1.575	0.138	66
25539075	2.56- 3.80	2.953	2.362	1.575	0.150	66
25558795	3.15- 4.30	3.543	2.835	1.772	0.181	66
25599455	3.80- 4.90	4.331	3.425	2.165	0.217	39

Part Number	Recommended for hose diameters in this range	D	d	P	W	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	Length of coil in Feet
	Dimensions in imperial					Packaging



9001
ISO certification

Pig's Tail™ Rail Series

Spirals

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Rail Hose Spiral

The Pig's Tail™ Rail Series hose wrap is an abrasion-resistant protector of exceptional tailored flexibility. The design fits seamlessly and smoothly around the hose beneath, guarding railway industry hydraulic assemblies in contact with rough surfaces. The resulting impact and mechanical stress protection enhances safety and maintains integrity.

Material: Polypropylene (PP)

***Certified to EN 45545-2 requirements**

Grey (-**GY**)
RAL 7005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm					Packaging
	Recommended for hose diameters in this range	D	d	P	W	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	Length of coil in metres
25118765	10- 17	12.00	10.00	10.00	1.50	50
25167475	12- 22	16.00	11.50	12.00	1.50	50
25201665	16- 27	20.00	14.00	14.50	1.80	50
25205345	22- 35	25.00	20.00	21.00	2.00	50
25237895	27- 43	32.00	25.00	24.00	2.40	50
25407195	33- 55	40.00	32.00	30.00	2.40	50
25438565	42- 64	50.00	38.00	35.00	3.00	20
25507755	52- 75	63.00	50.00	40.00	3.50	20
25539005	65- 97	75.00	60.00	40.00	3.80	20
25591435	80- 109	90.00	72.00	45.00	4.60	20
25599835	97- 124	110.00	87.00	55.00	5.50	12
Part Number	Recommended for hose diameters in this range	D	d	P	W	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	Length of coil in metres
	Dimensions in mm					Packaging

9001
ISO certification

14001
ISO certification

Pig's Tail™ Rail Series

Spirals

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in imperial					Packaging
	Recommended for hose diameters in this range	D	d	P	W	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	Length of coil in Feet
25118765	0.39- 0.66	0.472	0.394	0.394	0.059	164
25167475	0.47- 0.86	0.630	0.453	0.472	0.059	164
25201665	0.62- 1.06	0.787	0.551	0.571	0.071	164
25205345	0.86- 1.37	0.984	0.787	0.827	0.079	164
25237895	1.06- 1.69	1.260	0.984	0.945	0.094	164
25407195	1.30- 2.17	1.575	1.260	1.181	0.094	164
25438565	1.65- 2.52	1.969	1.496	1.378	0.118	66
25507755	2.05- 2.95	2.480	1.969	1.575	0.138	66
25539005	2.56- 3.80	2.953	2.362	1.575	0.150	66
25591435	3.15- 4.30	3.543	2.835	1.772	0.181	66
25599835	3.80- 4.90	4.331	3.425	2.165	0.217	39
Part Number	Recommended for hose diameters in this range	D	d	P	W	L
		Outside diameter	Inside diameter	Pitch	Wall thickness	Length of coil in Feet
	Dimensions in imperial					Packaging



9001
ISO certification

14001
ISO certification

Metal Protection Spiral Series

Spirals

Robust Spiral

The Metal Protection Spiral Series is engineered specifically to provide hoses with robust guarding from mechanical stress, high temperatures, and water abrasion. As well as reduction of physical damage, safety is enhanced by prevention of accidents related to hose spillage, slippage, and other unwanted movements. Durable construction ensures long-term performance.

Material: High-Grade Steel (Stl)

***Spirals are galvanised**

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Grey (-**GY**)
RAL 7037

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Packaging	Dimensions in imperial		Packaging
	d	WD	L	d	WD	L
	Inside diameter	Wire diameter	Length of coil in metres	Inside diameter	Wire diameter	Length of coil in feet
25189175	15.00	2.30	10	0.591	0.023	33
25194255	17.00	2.30	10	0.669	0.026	33
25234185	19.00	2.80	10	0.748	0.029	33
25237745	20.00	2.80	10	0.787	0.031	33
25319375	22.00	2.80	10	0.866	0.034	33
25376725	23.00	2.80	10	0.906	0.036	33
25401815	25.00	2.80	10	0.984	0.039	33
25417405	26.00	2.80	10	1.024	0.040	33
25436855	27.00	2.80	10	1.063	0.042	33
25447105	29.00	2.80	10	1.142	0.045	33
25500435	30.00	2.80	10	1.181	0.047	33
25520555	33.00	2.80	10	1.299	0.051	33
25546435	34.00	2.80	10	1.339	0.053	33
25634525	39.00	2.80	10	1.535	0.060	33
25658235	41.00	2.80	10	1.614	0.064	33
25829005	48.00	2.80	10	1.890	0.074	33
25858105	51.00	2.80	10	2.008	0.079	33
25861695	55,00	2,80	10	2,165	0,085	33
Part Number	d	WD	L	d	WD	L
	Inside diameter	Wire diameter	Length of coil in metres	Inside diameter	Wire diameter	Length of coil in feet
	Dimensions in mm		Packaging	Dimensions in imperial		Packaging

9001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information
and build your order with precision and confidence.

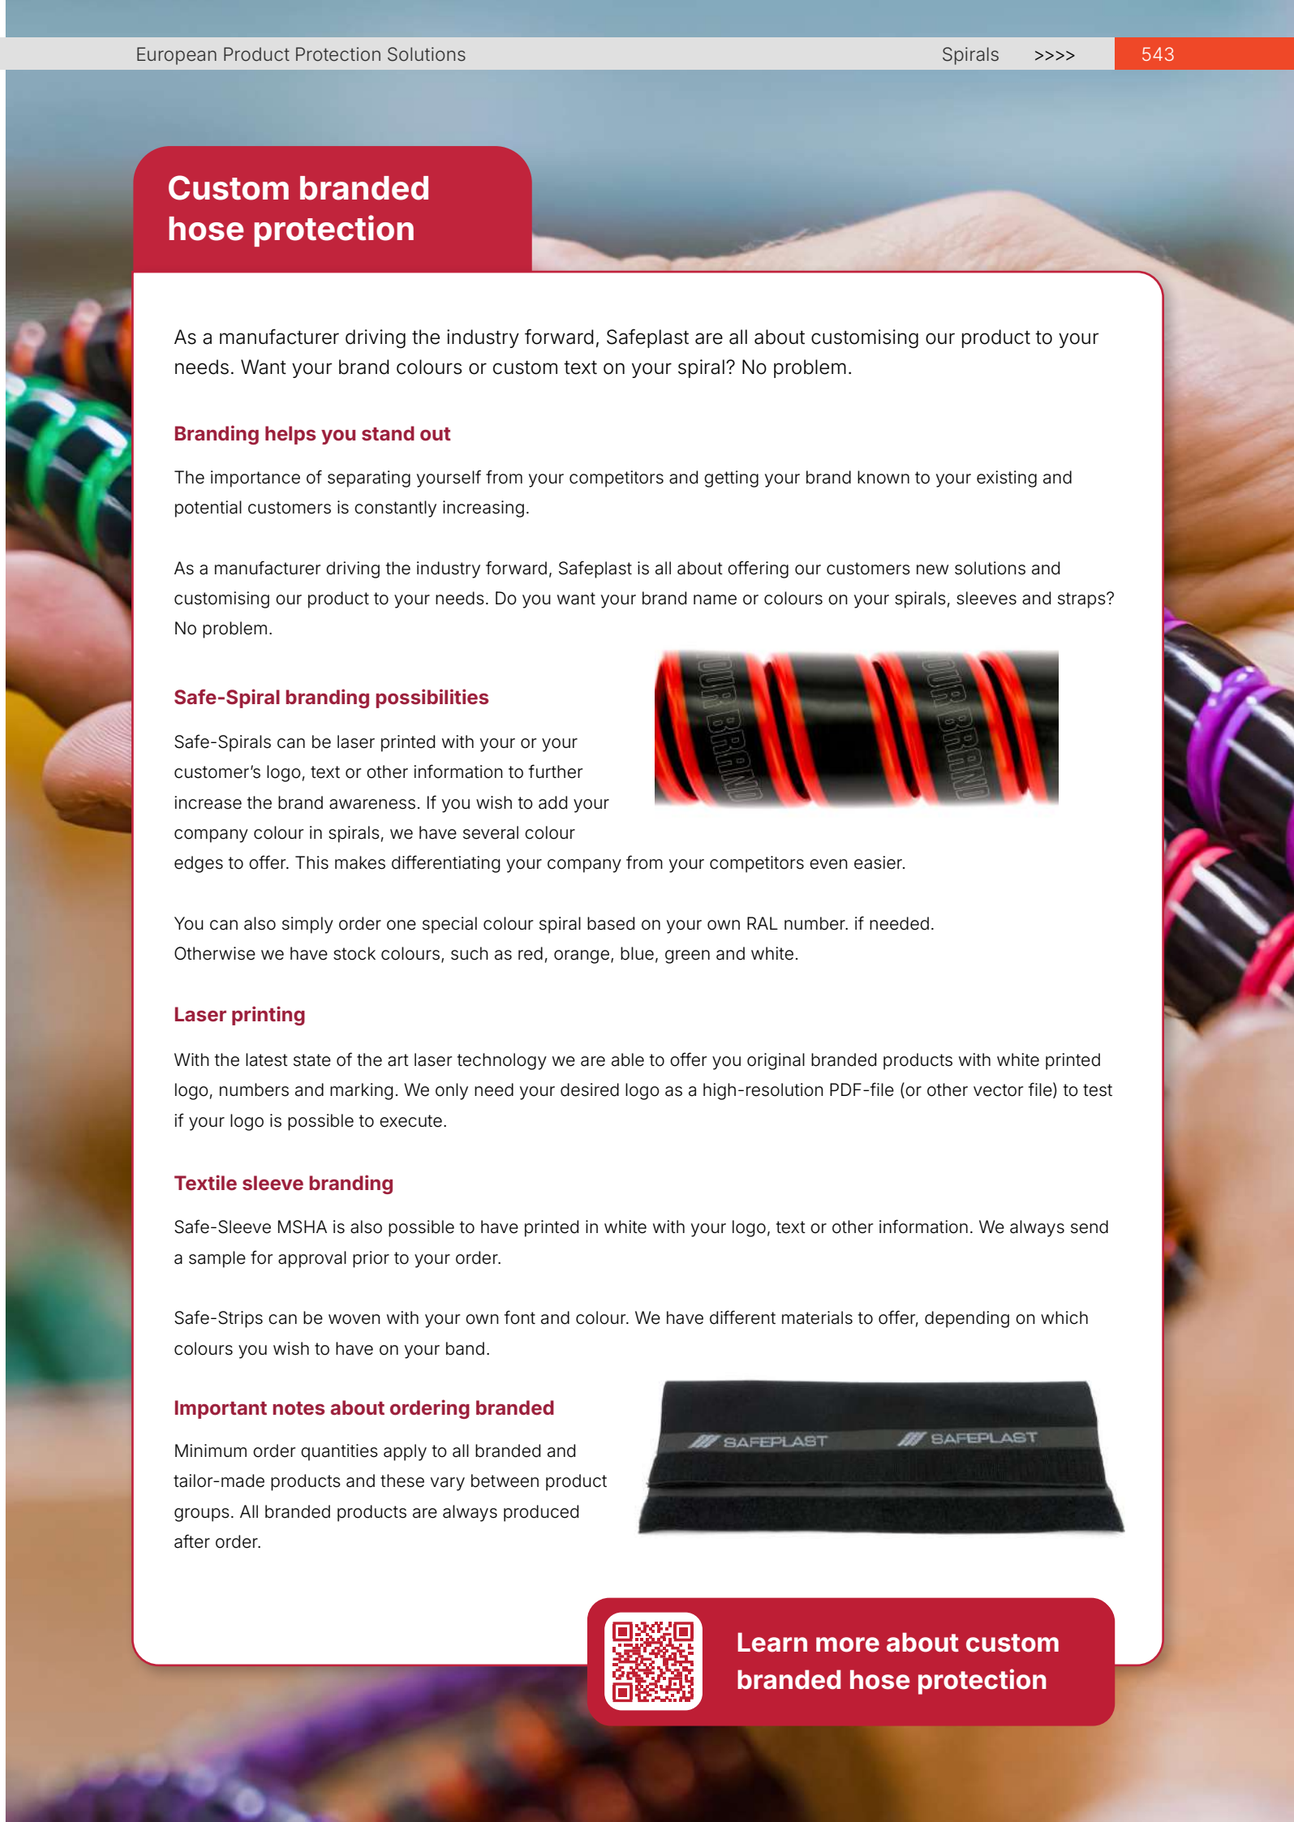

Custom branded hose protection

As a manufacturer driving the industry forward, Safeplast are all about customising our product to your needs. Want your brand colours or custom text on your spiral? No problem.

Branding helps you stand out

The importance of separating yourself from your competitors and getting your brand known to your existing and potential customers is constantly increasing.

As a manufacturer driving the industry forward, Safeplast is all about offering our customers new solutions and customising our product to your needs. Do you want your brand name or colours on your spirals, sleeves and straps? No problem.

Safe-Spiral branding possibilities

Safe-Spirals can be laser printed with your or your customer's logo, text or other information to further increase the brand awareness. If you wish to add your company colour in spirals, we have several colour edges to offer. This makes differentiating your company from your competitors even easier.

You can also simply order one special colour spiral based on your own RAL number. if needed. Otherwise we have stock colours, such as red, orange, blue, green and white.

Laser printing

With the latest state of the art laser technology we are able to offer you original branded products with white printed logo, numbers and marking. We only need your desired logo as a high-resolution PDF-file (or other vector file) to test if your logo is possible to execute.

Textile sleeve branding

Safe-Sleeve MSHA is also possible to have printed in white with your logo, text or other information. We always send a sample for approval prior to your order.

Safe-Strips can be woven with your own font and colour. We have different materials to offer, depending on which colours you wish to have on your band.

Important notes about ordering branded

Minimum order quantities apply to all branded and tailor-made products and these vary between product groups. All branded products are always produced after order.

Learn more about custom branded hose protection

Protective Textiles

When Crucial Hydraulic Component Protection is Critical

Caplugs sleeves ensure the safeguarding of hydraulic hoses from mechanical wear, environmental factors, and high temperatures. Robust protection preserves hose structure and functionality and is crucial to maintaining system integrity in hydraulic applications.

Abrasion, temperature, and chemical resistant construction is matched by user friendly design, with a built-in longitudinal slit for ease of installation. Fitting is achievable without disconnecting system components, simplifying routine maintenance and inspection.

Complementing their protection capability, these sleeves, wraps, strips, straps, safe-stoppers and tailor made products also play a significant role in hydraulic hose cluster organisation and security within systems in industries such as construction, transportation, and mining. Tangling is prevented, thus avoiding friction between hoses and wear and tear. Hose failure risk is therefore reduced significantly, enhancing safety, reliability, and uptime.

More details about these products on our website

Safe-Sleeve NW PES

Sleeves

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

High Velocity Fluid Escape-Prevention Sleeve

Forming an easy-to-fit flexible second layer, the sleeve prevents high-velocity fluid escape after hose rupture. Extreme temperatures functionality and robust abrasion resistance enable extra protection, in environments where safety requirements are stringent.

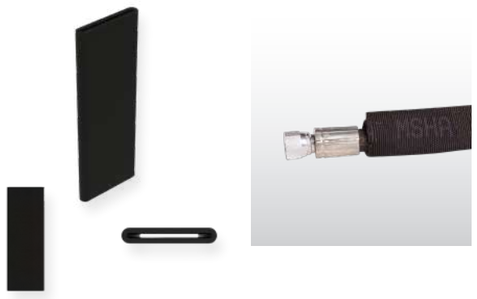

Material: Polyester (PES)
Temperature range: -50°C - +140°C

***Meets ISO 3457 and ISO 4413**

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

*For more information visit our website:
www.caplugs.eu



Part Number	Dimensions in mm		Packaging	Dimensions in inches		Packaging
	d	Flat width (as shipped)	L	d	Flat width (as shipped)	L
	Inside diameter		Length of coil in metres	Inside diameter		Length of coil in Feet
28315085	17.00	30.00	50	0.669	1.181	164
28643675	20.00	35.00	50	0.787	1.378	164
28638815	23.00	40.00	50	0.906	1.575	164
28479555	27.00	45.00	50	1.063	1.772	164
28627655	30.00	50.00	50	1.181	1.969	164
28504225	33.00	55.00	50	1.299	2.165	164
28773055	36.00	60.00	50	1.417	2.362	164
28779635	39.00	65.00	50	1.535	2.559	164
28828025	42.00	70.00	50	1.654	2.756	164
28525975	46.00	75.00	50	1.811	2.953	164
28854455	50.00	82.00	50	1.969	3.228	164
28278175	55.00	90.00	50	2.165	3.543	164
28708185	62.00	100.00	50	2.441	3.937	164
28901295	70.00	115.00	50	2.756	4.528	164
28181505	78.00	125.00	50	3.071	4.921	164
28114725	90.00	145.00	50	3.543	5.709	164
28322765	102.00	165.00	50	4.016	6.496	164
28352515	109.00	175.00	50	4.291	6.890	164
28918935	125.00	200.00	50	4.921	7.874	164
Part Number	d Inside diameter	Flat width (as shipped)	L Length of coil in metres	d Inside diameter	Flat width (as shipped)	L Length of coil in Feet
	Dimensions in mm		Packaging	Dimensions in inches		Packaging

9001
ISO certification

14001
ISO certification

caplugs

Visit **www.caplugs.eu** for full product information and build your order with precision and confidence.

Safe-Sleeve MSHA Series

Sleeves

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

High Velocity Fluid Escape-Prevention Sleeve

The Safe-Sleeve MSHA Series fully meets Mine Safety and Health Administration standards. Forming an easy-to-fit flexible second layer, the sleeve prevents high-velocity fluid escape after hose rupture. Extreme temperatures functionality and robust abrasion resistance enable extra protection, in environments where safety requirements are stringent.

Material: Polyester (PES)
Temperature range: -50°C - +140°C

***Meets ISO 3457 and ISO 4413**

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

*For more information visit our website:
www.caplugs.eu



Part Number	Dimensions in mm		Packaging	Dimensions in inches		Packaging
	d	Flat width (as shipped)	L	d	Flat width (as shipped)	L
	Inside diameter		Length of coil in metres	Inside diameter		Length of coil in Feet
28170595	17.00	30.00	50	0.669	1.181	164
28185325	20.00	35.00	50	0.787	1.378	164
28189615	23.00	40.00	50	0.906	1.575	164
28216465	27.00	45.00	50	1.063	1.772	164
28226225	30.00	50.00	50	1.181	1.969	164
28316605	33.00	55.00	50	1.299	2.165	164
28353425	36.00	60.00	50	1.417	2.362	164
28368955	39.00	65.00	50	1.535	2.559	164
28417225	42.00	70.00	50	1.654	2.756	164
28428015	46.00	75.00	50	1.811	2.953	164
28436635	50.00	82.00	50	1.969	3.228	164
28442615	55.00	90.00	50	2.165	3.543	164
28456125	62.00	100.00	50	2.441	3.937	164
28469615	70.00	115.00	50	2.756	4.528	164
28484255	78.00	125.00	50	3.071	4.921	164
28551285	90.00	145.00	50	3.543	5.709	164
28588895	102.00	165.00	50	4.016	6.496	164
28669895	109.00	175.00	50	4.291	6.890	164
28681545	125.00	200.00	50	4.921	7.874	164
Part Number	d Inside diameter	Flat width (as shipped)	L Length of coil in metres	d Inside diameter	Flat width (as shipped)	L Length of coil in Feet
	Dimensions in mm		Packaging	Dimensions in inches		Packaging

9001
ISO certification

14001
ISO certification

caplugs

Our engineering experts are ready to help you with fully customised solutions at **sales.eu@caplugs.com** or call on **+31 73 643 02 88**.

Safe-Sleeve PP Series

Sleeves

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Stress Resistant Sleeve

The Safe-Sleeve PP Series hose protector fully envelops the underlying hose, guarding from abrasion and wear. A strong protective layer withstands vibration, movement, and impacts, supporting the hose wall and reducing bursting or leakage potential. Application in an operational setup is easy while built-in flexibility avoids restriction of movement.

Material: Polypropylene (PP)
Temperature range: -40°C - +80°C

***Meets ISO 3457 (pin hole approved) and ISO 4413**

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in mm		Packaging	Dimensions in inches		Packaging
	d		L	d		L
	Inside diameter	Flat width (as shipped)	Length of coil in metres	Inside diameter	Flat width (as shipped)	Length of coil in Feet
28174785	17.00	30.00	50	0.669	1.181	164
28339015	20.00	35.00	50	0.787	1.378	164
28395025	23.00	40.00	50	0.906	1.575	164
28398875	27.00	45.00	50	1.063	1.772	164
28515155	30.00	50.00	50	1.181	1.969	164
28557755	36.00	60.00	50	1.417	2.362	164
28588975	39.00	65.00	50	1.535	2.559	164
28603855	46.00	75.00	50	1.811	2.953	164
28652705	55.00	90.00	50	2.165	3.543	164
28658085	62.00	100.00	50	2.441	3.937	164
28668075	78.00	125.00	50	3.071	4.921	164
28699755	94.00	150.00	50	3.701	5.906	164
28777265	109.00	175.00	50	4.291	6.890	164
28875235	125.00	200.00	50	4.921	7.874	164

Part Number	d		L	d		L
	Inside diameter	Flat width (as shipped)	Length of coil in metres	Inside diameter	Flat width (as shipped)	Length of coil in Feet
	Dimensions in mm		Packaging	Dimensions in inches		Packaging

9001
ISO certification

14001
ISO certification

Ferrules Series

Accessories

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Secure Hose Fastener

The Ferrules Series is designed to ensure secure fastening of hoses to other components and fittings, maintaining hydraulic systems integrity. At junctions, they enable consistent high-pressure performance by leak-proof sealing. Application by crimping onto the hose prevents fluid losses, for smoother and more reliable hydraulic power transmission.



Tool Required: Aluminium (AL) or Steel (St)

***These ferrules are used when crimping textile sleeves onto hydraulic hoses**

Aluminum (-**AL**)
RAL 9007

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	Material	Dimensions in mm			Dimensions in inches			Packaging
		d	D	H	d	D	H	
		Inside diameter	Outside diameter	Height	Inside diameter	Outside diameter	Height	Carton quantity
34957401	Aluminium	17.00	20.00	27.00	0.669	0.787	1.063	100
34272381	Aluminium	22.00	25.00	27.00	0.866	0.984	1.063	100
34476661	Aluminium	27.00	30.00	27.00	1.063	1.181	1.063	100
34515291	Aluminium	32.00	35.00	27.00	1.260	1.378	1.063	100
34598151	Aluminium	36.00	40.00	30.00	1.417	1.575	1.181	100
34653161	Aluminium	41.00	45.00	30.00	1.614	1.772	1.181	100
34766391	Aluminium	46.00	50.00	30.00	1.811	1.969	1.181	100
34811401	Aluminium	51.00	55.00	30.00	2.008	2.165	1.181	100

Part Number	Material	d	D	H	d	D	H	Carton quantity
		Inside diameter	Outside diameter	Height	Inside diameter	Outside diameter	Height	
		Dimensions in mm			Dimensions in inches			Packaging

9001
ISO certification

Safe-Wrap Series

Safe-Wrap

Rapid-Fit Sleeve

The Safe-Wrap Series hose wrap has hook-and-loop closure for fast installation or removal with no system disassembly. Robust versatile design enables regular maintenance and inspection routines. Hose functionality is prolonged by tensile resistance to temperature extremes and mechanical wear forces and repulsion of fluids including water and oil.

Material: Polyamide (PA) with Polyurethane Coating (PU)
Temperature Range: -20°C - +180°C

***This product can be custom printed with your logo**
***Available as MSHA-approved version**

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Black (-**BK**)
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in millimetres	Packaging	Dimensions in inches	Packaging
	D	L	D	L
	To fit Outside diameter	Length of coil in metres	To fit Outside diameter	Length of coil in Feet
28117225	20	25	0.787	82
28153655	40	25	1.575	82
28172675	50	25	1.969	82
28185145	60	25	2.362	82
28190375	80	25	3.150	82
28224915	100	25	3.937	82
28228215	120	25	4.724	82
28236675	150	25	5.906	82
28240515	20	10	0.787	33
28274835	40	10	1.575	33
28280025	50	10	1.969	33
28308055	60	10	2.362	33
28342355	80	10	3.150	33
28390955	100	10	3.937	33
28394085	120	10	4.724	33
28437585	150	10	5.906	33
Part Number	D	L	D	L
	To fit Outside diameter	Length of coil in metres	To fit Outside diameter	Length of coil in Feet
	Dimensions in millimetres	Packaging	Dimensions in inches	Packaging

9001
ISO certification

14001
ISO certification

Safe-Fire Series

Fire-Sleeve

Heat- and Flame-Resistant Sleeve

The Safe-Fire Sleeve Series delivers continuous protection from physical and environmental factors, with built-in high-heat source and flame resistance. A robust closure mechanism gives reliable cover of hoses and cables, resisting movement or vibration. No-disassembly application is efficient, while visual indication identifies protected systems.

Material: Silicone (VMQ) and Glass Fibre (FRP)
Temperature Resistance: 260°C / 500°F (Continuous)

***Can be cut to custom lengths**

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Red (-**RD**)
RAL 3008

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in millimetres	Packaging	Dimensions in inches	Packaging
	d	L	d	L
	To fit Outside diameter	Length of coil in metres	To fit Outside diameter	Length of coil in Feet
28173505	10	20	0.394	66
28293345	15	20	0.591	66
28314415	20	20	0.787	66
28378265	25	20	0.984	66
28392995	30	20	1.181	66
28426235	35	20	1.378	66
28430215	40	20	1.575	66
28489215	45	15	1.772	49
28516445	50	15	1.969	49
28553725	55	15	2.165	49
28739055	60	15	2.362	49
28851855	65	10	2.559	33
28899295	70	10	2.756	33
28924195	75	10	2.953	33
Part Number	d	L	d	L
	To fit Outside diameter	Length of coil in metres	To fit Outside diameter	Length of coil in Feet
	Dimensions in millimetres	Packaging	Dimensions in inches	Packaging

9001
ISO certification

14001
ISO certification

Safe-Fire Series

Fire-Wrap

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Heat- and Flame-Resistant Wrap

The Safe-Fire Wrap Series shields hoses, wires, and cables, resisting the harsh factors of extreme temperature, abrasion, and mechanical stress. Cost-effective re-use is enabled by flexible and dislodgement-proof design, without losing functionality. Protected components are clearly identified visually for efficient operation and enhanced safety.

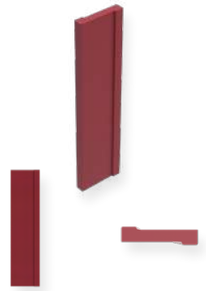

Material: Silicone (VMQ) and Glass Fibre (FRP)
Temperature Resistance: 260°**C** / 500°**F** (Continuous)

***Velcro fasteners close this product**

Red (-**RD**)
RAL 3008

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in millimetres	Packaging	Dimensions in inches	Packaging
	D	L	D	L
	To fit Outside diameter	Length of coil in metres	To fit Outside diameter	Length of coil in Feet
28136765	10	20	0.394	66
28240495	15	20	0.591	66
28258215	20	20	0.787	66
28306195	25	20	0.984	66
28460295	30	20	1.181	66
28525385	35	20	1.378	66
28556745	40	20	1.575	66
28661525	45	15	1.772	49
28755525	50	15	1.969	49
28994695	75	15	2.953	49
Part Number	D	L	D	L
	To fit Outside diameter	Length of coil in metres	To fit Outside diameter	Length of coil in Feet
	Dimensions in millimetres	Packaging	Dimensions in inches	Packaging

9001
ISO certification

14001
ISO certification

Safe-Fire Series

Fire-Tape

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

High Temperature Tape

The Safe-Fire Tape Series is designed to maximise the protection fire sleeves provide by sealing their ends to resist high temperatures, flames, and molten splash. Flexibility enables conformity to many shapes and sizes, with a tight and secure seal. Resilience in harsh conditions without degrading maintains protective qualities over time.

Material: Silicone (VMQ)
Temperature Resistance: 260°**C** / 500°**F** (Continuous)

***Can be used to seal the ends of fire sleeve**

Red (-**RD**)
RAL 3008

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in millimetres		Dimension in imperial		
	W	L	W	W	L
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards
23480155	25.00	3	0.984	1	3
Part Number	W	L	W	W	L
	Width	Roll length in metres	Width as a decimal	Width as a fraction	Roll length in yards
	Dimensions in millimetres		Dimension in imperial		

9001
ISO certification

14001

Safe-Strip Series

Straps

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Hose Binding Strap

The Safe-Strap Series binding strap is designed to enable robust and reliable consolidation of hose and cable assemblies. The buckle system is engineered to engage securely with the strap, resisting loosening or accidental release under mechanical stress. Precise yet intuitive adjustment accommodates different assembly dimensions with consistent security.

Material: Polyester (PES)
Temperature Resistance: 140°**C** / 284°**F**

***Can be used to strap hose bundles before applying spirals**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in millimetres			Dimensions in inches			Packaging
	L	W	T	L	W	T	
	Length	Strap width	Strap thickness	Length	Strap width	Strap thickness	Straps per bundle
30370674	250.00	9.00	1.40	9.843	0.354	0.055	100
30612054	400.00	20.00	1.80	15.748	0.787	0.071	50
30690014	600.00	20.00	1.80	23.622	0.787	0.071	50
30789514	800.00	20.00	1.80	31.496	0.787	0.071	50
30881774	850.00	23.00	2.50	33.465	0.906	0.098	50

Part Number	L	W	T	L	W	T	Straps per bundle
	Length	Strap width	Strap thickness	Length	Strap width	Strap thickness	
	Dimensions in millimetres			Dimensions in inches			Packaging

9001
ISO certification

14001
ISO certification

Safe-Strip Series

Strips

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Heavy-Duty Bundling Strap

The Safe-Strip Bundling Strap enables safe, efficient handling of long heavy hose assemblies, especially when fitting protective spirals. The robust quick-release buckle mechanism is easy to use, while the strap is tapered for smooth insertion and a built-in loop secures the tail. Mechanical stress resistant the strap is very practical in operation.

Material: Polypropylene (PP) and Polyester (PES) on request
Temperature Resistance: 80°**C** / 176°**F**

***Can be used to strap hose bundles before applying spirals**
*** Available also with custom logo and text webbing (minimum order quantities apply)**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	Dimensions in millimetres			Dimensions in inches			Packaging	
	To fit maximum bundle diameter	W	L	To fit maximum bundle diameter	W	L	Strips per bundle	Strips per box
		Strip width	Strip length		Strip width	Strip length		
30838881	120.00	25.00	500.00	4.724	0.984	19.685	25	100
30886511	280.00	25.00	1000.00	11.024	0.984	39.370	25	100
30923001	420.00	25.00	1500.00	16.535	0.984	59.055	25	100

Part Number	To fit maximum bundle diameter	W	L	To fit maximum bundle diameter	W	L	Strips per bundle	Strips per box
		Strip width	Strip length		Strip width	Strip length		
	Dimensions in millimetres			Dimensions in inches			Packaging	

9001
ISO certification

14001
ISO certification

Safe-Strip Series

Safe-Strip with Hook-Loop fasteners

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Hose Assembly Fastener

The Safe-Strip with Hook-Loop fastener enables efficient handling of long or heavy hoses, for streamlined installation or maintenance. The high tensile strength strap withstands industrial environments durably. Adjustability is achieved by aligning the Hook-Loop strips then pressing together to fit securely, even around different diameter hose bundles.

Material: Polypropylene (PP)
Temperature Resistance: 80°C / 176°F

***Can be used to strap hose bundles before applying spirals**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)

*For more information visit our website:
www.caplugs.eu

Part Number	Dimensions in millimetres					Packaging	
	To fit maximum bundle diameter	With fastening eyelet	W Strip width	L Strip length	L1 Eyelet area length	Strips per bundle	Strips per box
30385511	70.00		40.00	310.00		10	100
30386321	100.00		40.00	435.00		10	100
30403261	125.00		40.00	505.00		10	100
30502301	155.00		40.00	605.00		10	100
30505281	180.00		40.00	680.00		10	50
30120891	70.00	Yes	40.00	300.00		10	50
30123111	100.00	Yes	40.00	415.00		10	50
30210201	125.00	Yes	40.00	500.00		10	50
30352721	155.00	Yes	40.00	620.00		10	50
30362881	180.00	Yes	40.00	725.00		10	50

Part Number	To fit maximum bundle diameter	With fastening eyelet	W Strip width	L Strip length	L1 Eyelet area length	Strips per bundle	Strips per box
	Dimensions in millimetres					Packaging	

9001
ISO certification

14001
ISO certification

Safe-Strip Series

Safe-Strip with Hook-Loop fasteners

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

*For more information visit our website:
www.caplugs.eu

Part Number	Dimensions in inches					Packaging	
	To fit maximum bundle diameter	With fastening eyelet	W Strip width	L Strip length	L1 Eyelet area length	Strips per bundle	Strips per box
30385511	2.756		1.575	12.205		10	100
30386321	3.937		1.575	17.126		10	100
30403261	4.921		1.575	19.882		10	100
30502301	6.102		1.575	23.819		10	100
30505281	7.087		1.575	26.772		10	50
30120891	2.756	Yes	1.575	11.811		10	50
30123111	3.937	Yes	1.575	16.339		10	50
30210201	4.921	Yes	1.575	19.685		10	50
30352721	6.102	Yes	1.575	24.409		10	50
30362881	7.087	Yes	1.575	28.543		10	50

Part Number	To fit maximum bundle diameter	With fastening eyelet	W Strip width	L Strip length	L1 Eyelet area length	Strips per bundle	Strips per box
	Dimensions in inches					Packaging	

9001
ISO certification

14001
ISO certification

Accessories

When Efficient Installation of Protective Products Is Critical

Caplugs accessories are purpose designed to increase ease of installation and maintenance of protective solutions, specifically spiral wraps applied to cables, wires, and hoses. Their role is crucial in ensuring efficient and safe operation while avoiding damage to the components they protect.

These installation tools enhance accuracy and security of spiral wrap application, guaranteeing a robust and consistent stress and contaminant resistant layer. The resulting precision is critical in vital to enhancing the longevity and effectiveness of protection provided to underlying systems.

The accessories category also includes items that support efficiency of routine maintenance operations in construction, transportation, and agriculture. These products enable systems cleanliness and component security during maintenance, thus supporting operational safety and efficiency, sustaining high performance, and minimising downtime.

More details about these products on our website

Safe-Bundler Series

Accessories

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Installation Tool

The Safe-Bundler Series Installation Tool enables precise, practical and convenient application of spiral hose wraps. Powered by an electric drill, the tool continuously feeds the wrap onto the hose bundle for a consistent and secure fit. Significantly reducing physical effort, this compact solution will make even higher-volume working easy and efficient.

Tool Required: Electric Drill

***Available in two sizes:**
- **Small:** for spirals with outer diameters (OD) of 32mm to 40mm
- **Large:** for spirals with outer diameters (OD) of 50mm to 140mm

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	For spirals with Outside diameter range (mm)	For spirals with Outside diameter range (inches)
34181841	32.00- 40.00	1.250- 1.570
34523201	50.00- 140.00	1.970- 5.510

| Part Number | For spirals with Outside diameter range (mm) | For spirals with Outside diameter range (inches) |

9001
ISO certification

14001
ISO certification

Wrapman Series

Accessories

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Installation Tool

The Wrapman tool is an innovative solution making spiral hose protection installation easier. Primarily designed to wrap protective spirals around hydraulic hoses, the tool's mounting lugs can be clamped in a vice to create a stable base. An adjustable screw-in locator enables precise protection alignment with the hose and easily achieved accuracy.

Tool Required: Hand-Operated

***Available for spirals with outer diameters (OD) of 3.18mm to 31.75mm**

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)





*For more information visit our website: **www.caplugs.eu**

Part Number	For spirals with Outside diameter range (mm)	For spirals with Outside diameter range (inches)
34636261	3.18- 31.75	0.125- 1.250

| Part Number | For spirals with Outside diameter range (mm) | For spirals with Outside diameter range (inches) |

9001
ISO certification

Safe-Tool Series

Accessories

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Spiral Hose Mount

The Safe-Tool Series is a specialised hand-operated device designed to make the process of mounting spiral hose protection easier, faster and more efficient. The ergonomic design significantly reduces the manual strain associated with fitting protection while making sure that each fit is consistent to maximise secure coverage and extend hose working life.

Tool Required: Hand-Operated

***Available in two sizes:**
- **Small:** for spirals with outer diameters (OD) of 20mm to 50mm
- **Large:** for spirals with outer diameters (OD) of 63mm to 140mm

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Part Number	For spirals with Outside diameter range (mm)	For spirals with Outside diameter range (inches)
34325301	20.00- 50.00	0.790- 1.970
34439091	63.00- 140.00	2.480- 5.510

Part Number	For spirals with Outside diameter range (mm)	For spirals with Outside diameter range (inches)



9001
ISO certification

14001
ISO certification

Service Plug Series

Accessories

Scan for free samples
sales.eu@caplugs.com
+31 73 643 02 88

Tapered Service Plug

The Service Plug series enables fluid containment and spillage prevention, while barring air ingress into hydraulic systems through disconnected lines. Plug design enables easy insertion and strong grip for manual tightening and operational speed. Durability against mechanical stress and pressure deformation is matched by applications versatility.

Material: Acrylonitrile Butadiene (NBR)
Temperature Resistance: 120°**C** / 248°**F**

***Packs can be custom printed with your logo**

Yellow (-**YL**)
RAL 1021

Colours shown are not exact and for reference only. Please request a colour sample for verification. Contact Caplugs for alternative or custom colour options.
Parts available in colour(s) shown above. When placing an order please reference a part number and add the corresponding colour code to the end. (e.g. for yellow 12345678-YL)



*For more information visit our website: **www.caplugs.eu**

Individual plugs							
Part Number	Dimensions in mm			Dimensions in imperial			Packaging
	D	D1	H	D	D1	H	
	Outside diameter to fit hole	Outside diameter to fit hole	Height	Outside diameter to fit hole	Outside diameter to fit hole	Height	Quantity per box
21369711	1.00	10.00	59.00	0.039	0.394	2.323	3.400
21796561	5.00	22.00	114.00	0.197	0.866	4.488	600
21909031	13.00	42.00	166.00	0.512	1.654	6.535	400

Part Number	D	D1	H	D	D1	H	Quantity per box
	Outside diameter to fit hole	Outside diameter to fit hole	Height	Outside diameter to fit hole	Outside diameter to fit hole	Height	
	Dimensions in mm			Dimensions in imperial			Packaging

Packs of plugs				
Part Number	Pack Contents			Packaging
	Small plugs (21369711)	Medium plugs (21796561)	XL plugs (21909031)	Quantity of packs per box
	Qty per pack	Qty per pack	Qty per pack	
21790976	4	4	2	40
21865916	20			76
21878396		10		40
21965636			4	28

Part Number	Small plugs (21369711)	Medium plugs (21796561)	XL plugs (21909031)	Quantity of packs per box
	Qty per pack	Qty per pack	Qty per pack	
	Pack Contents			Packaging

9001
ISO certification

13485
ISO certification

16949
IATF certification

European Product Protection Solutions

U.S. Parts

Caps
Non-threaded

Scan for free samples
sales.eu@caplugs.com
+31 1234 567 8910

C
Utility Caps

CC
Flange Covers



CE
Plastic Caps for Threaded Pipe Ends

CEC
Conductive Caps for Threaded Connectors

CLT
Standard Duty Long Thread Well Casing Protectors

CST
Standard Duty STC Well Casing Thread Protectors

DCC
Static Dissipative & Conductive Protectors for D-Subminiature Connectors

DCF
Static Dissipative & Conductive Protectors for D-Subminiature Flared Shells

DP
Conductive Caps / Plugs



DS
ESD D-Subminiature Caps

EC
Caps for Threaded Connectors



EMC
Static Dissipative & Conductive Protectors for Electro Miniature Connectors

EPN-240
Recessed Caps for Pipe Ends

EPN-250
Bevel-Edge Protectors for Pipe Ends



EPN-310
Outside Fitting Protectors

EZC
Non-Threaded NPT Caps

FCO
Flat-Faced O-Ring Cap

FF
Caps for Flanged and Flange Mounted Fittings

FTC
Flareless Tube and Nut Caps

GC
Grease Caps

HC
Hose Caps

HEX
Hexagonal Caps

HSF
High Pressure Split-Flange Covers

J
Tear-Tab Caps for NPT Threads

Caps
Non-threaded

Scan for free samples
sales.eu@caplugs.com
+31 1234 567 8910

JS
Tear-Tab Caps for Straight Threads

MCN-TCP
Tethered Cap - Plastic

MCN-TCV
Tethered Caps in Vinyl

MDC
Static Dissipative & Conductive Protectors for Micro-D Connectors

MJ
Tear-Tab Caps for Tapered Metric Threads

MJS
Tear-tab Caps for Metric Threads

MS
MS Style Vinyl Hex Caps

MSC
ESD Connector Caps and Plugs

NUO
Standard Duty Non-Upset End Tubing Protection



OE
Open-End Thread Protectors

OF
Long-Threaded Connector Caps

PCAP
Propane Cap

PM
Push-On Metric Caps

PN
Push-On NPT Caps

PO
Push-On, Straight-Thread Caps

RC
Caps for Threaded Connectors

RCL
Long-Threaded Connector Caps

RFP
Raised Face Flange Protectors

RH
Finishing Caps for Raised Head Screws

RHW
Flanged Steel Washers for RH Series Finishing Caps

SEC
Static Dissipative Caps for Threaded Connectors

SF
Caps for Split-Flange Connections

SSR
Standard Sucker Rod Protection

T
Tapered Caps and Plugs

European Product Protection Solutions American Products >>>>

U.S. Parts

Caps
Non-threaded

Scan for free samples
sales.eu@caplugs.com
+31 1234 567 8910

UEO
Standard Duty External Upset End Tubing Protection

VCF
Vinyl Caps with Flanges

VFT
Textured Vinyl Caps with Flat Ergonomic Pull Tab

VP
Vented Pipe Caps

VSE
Vinyl Square End Caps

VTC
Vinyl Tethered Caps

VVC
Vinyl Vented Caps

W
Tapered Caps & Plugs with Wide Flanges

WCC
Vinyl Corner Covers

WW
Tapered Caps & Plugs with Wide, Thick Flanges

WWX
Tapered Caps & Plugs with Extra-Wide, Extra-Thick Flanges

Caps
Threaded

Scan for free samples
sales.eu@caplugs.com
+31 1234 567 8910

CD-M
Threaded Plastic Caps for Metric Fittings



DC
UN / UNS Caps

FUF
Flareless Union Fitting Caps

PSR
Polished Sucker Rod Caps

U.S. Parts

Caps / Plugs
Non-threaded

Scan for free samples
sales.eu@caplugs.com
+31 1234 567 8910

C
Utility Caps

CEC
Conductive Caps for Threaded Connectors



DCC
Static Dissipative & Conductive Protectors for D-Subminiature



DCF
Static Dissipative & Conductive



DMC
Protective Dust Cap for DMC-M Receptacle

DP
Conductive Caps / Plugs



DS
ESD D-Subminiature Caps

E
Utility Plugs



EMC
Static Dissipative & Conductive Protectors for Electro Miniature Connectors



IEC
Plugs for Female Connectors

K
Type K Copper Tubing Plugs



MDC
Static Dissipative & Conductive Protectors for Micro-D Connectors

MSC
ESD Connector Caps and Plugs

SEC
Static Dissipative Caps for Threaded Connectors

SEP
Static Dissipative Plugs for Threaded Connectors

Caps / Plugs
Threaded

Scan for free samples
sales.eu@caplugs.com
+31 1234 567 8910

CEC
Conductive Caps for Threaded Connectors

CEP
Conductive Plugs for Threaded Connectors

EC
Caps for Threaded Connectors

EP
Plugs for Threaded Connectors

U.S. Parts

Plugs
Non-threaded

Scan for free samples
sales.eu@caplugs.com
+31 1234 567 8910

BP
Button Plugs with Recessed-Type Heads

BPF
Button Plugs with Flush-Type Heads

BPFE
Ergonomic Button Plugs with Flush-Type Heads

CEP
Conductive Plugs for Threaded Connectors

CPT
Center Pull-Tab Tapered Plugs

CPT-NF
Center Pull-Tab Tapered Plugs without Flange

CT
Plugs for Type L and Type M Tubing

CXT
Center Cross Pull-Tab Plug

DP
Conductive Caps / Plugs

E
Utility Plugs

ECP
Ergonomic Center Pull-Tab Plug

EP
Plugs for Threaded Connectors

EPN-305
Push-In Flange Protectors

EZP
NPT Plugs

FC
Stud Hole Flange Protectors

FLGV
Valve Flange Protectors



FPN
Sucker-Rod Plugs



IEC
Plugs for Female Connectors

K
Type K Copper Tubing Plugs

L
Lift-Tab Tapered Plugs

MSC
ESD Connector Caps and Plugs

OT
Plugs for Type K Style Tubing

PIP
Push-in-Plugs

RH
Finishing Caps for Raised Head Screws

Plugs
Non-threaded

Scan for free samples
sales.eu@caplugs.com
+31 1234 567 8910

RHW
Flanged Steel Washers for RH Series Finishing Caps



RSP-SH
Rubber Resealable Plugs

SEP
Static Dissipative Plugs for Threaded Connectors

SFP
Covers for Split-Flange Connections

SH
Finishing Plugs for Socket Head Screws

SPT
Side Pull-Tab Plugs

STC
Snap-to-Connect Plugs

STP
Shallow Tube Plugs for Packaging Tubes

T
Tapered Caps and Plugs

TE
Tube End Caps

TE-TAB
Tube End Caps with Tabs



TE-HNG
Tube End Hanger Plugs

UPP
Universal Pull Plug

W
Tapered Caps & Plugs with Wide Flanges

WPT
Extra-Wide Flange Center Pull Tab

WW
Tapered Caps & Plugs with Wide, Thick Flanges

WWX
Tapered Caps & Plugs with Extra-Wide, Extra-Thick Flanges

European Product Protection Solutions

U.S. Parts

Plugs
Threaded

Scan for free samples
sales.eu@caplugs.com
+31 1234 567 8910

AFO
Threaded Aluminum Plugs for Flat-Faced O-Ring Hydraulic Fittings

BSP
Threaded Plugs for British Standard Pipe Fittings

DPN
Threaded (UN and UNS) Plugs



MT
Metric Sealing Plugs

NPT
Plug for NPT Fitting

P
Plastic Threaded Plugs for NPT Pipe Fittings

PDE
Plastic Threaded Plugs for Flareless Tube and Nut Assemblies

PDF
Threaded Plastic Plugs for Flat-Faced O-Ring Hydraulic Fittings

PDI
Threaded Plugs for Inverted Flared Fittings

PDO
Plastic Threaded Plugs for SAE O-Ring Ports

PIP-TAB
Push-in-Plugs with Pull-Tab

RPO
Threaded Plugs for SAE Straight Threaded Ports

RPO-M
Threaded Plugs for ISO Metric Ports

TB
General-Purpose Plugs for British Standard Pipe Fittings

TM
Metric General-Purpose Plugs

TV
Flexible Tapered Vinyl Caps & Plugs

Plugs
Masking

Scan for free samples
sales.eu@caplugs.com
+31 1234 567 8910



NPTF-SH
Push in Plugs



RMCP-SH
Resealable Masking Cap/Plug

RSP-SH
Rubber Resealable Plugs



RSPSF-SH
Resealable Push in Plugs (Sulfur Free)

European Product Protection Solutions

U.S. Parts

Miscellaneous

Masking

Scan for free samples
sales.eu@caplugs.com
+31 1234 567 8910

EP58-SH
Edge Protectors

Discs and Shapes

Masking

Scan for free samples
sales.eu@caplugs.com
+31 1234 567 8910

AF-SH
Aluminum Foil Discs

LF-SH
Lead Foil Discs

TF-SH
Teflon Discs

European Product Protection Solutions

U.S. Parts

Hooks, Bars and Racks
Masking

Scan for free samples
sales.eu@caplugs.com
+31 1234 567 8910

BCB-SH
Bottom Cross Bar

CB-SH
Rectangular Cross Bars

C-SH
Ultrabake™ C-Hooks

CV-SH
CV Hooks

ROD-SH
Rod and Clip Sets

SB-SH
Smart Bar™

SHVA-SH
Snap Hooks for 3/16" Dia. Rods

SHVB-SH
Snap Hooks for 1/4" Dia. Rods

SHVC-SH
Snap Hooks for 3/8" Dia. Rods

SPLINE-SH
Splines

SQV-SH
Ultrabake™ Square V-Hooks

S-SH
Ultrabake™ S-Hooks

TCB-SH
Top Cross Bar

UWH-SH
Spin Hooks

VB-SH
Smart Hooks™

V-SH
V-Hooks

Containers, Caps and Plugs
Packaging

Scan for free samples
sales.eu@caplugs.com
+31 1234 567 8910

CSV
Container Square Vial

CVC
Hinged Containers

CVV
Vials

STP
Shallow Tube Plugs for Packaging Tubes

TE
Tube End Caps

TE-TAB
Tube End Caps with Tabs



TE-HNG
Tube End Hanger Plugs

TRC
Closed End tubing

TRO
Open End Tubing

TSO
Square Open End Tubing

VSE
Vinyl Square End Caps

European Product Protection Solutions

U.S. Parts

Caps
Pipe and Flange

Scan for free samples
sales.eu@caplugs.com
+31 1234 567 8910

BUT
Standard Duty Well Casing Protectors

CC
Flange Covers



CE
Plastic Caps for Threaded Pipe Ends

CLT
Standard Duty Long Thread Well Casing Protectors

CST
Standard Duty STC Well Casing Thread Protectors

EPN-240
Recessed Caps for Pipe Ends

EPN-250
Bevel-Edge Protectors for Pipe Ends

EPN-305
Push-In Flange Protectors



EPN-310
Outside Fitting Protectors

FF
Caps for Flanged and Flange Mounted Fittings

HSR
Hex Cap Sucker-Rod Protectors

NUO
Standard Duty Non-Upset End Tubing Protection

OE
Open-End Thread Protectors

PSR
Polished Sucker Rod Caps

RFP
Raised Face Flange Protectors

SF
Caps for Split-Flange Connections

SSR
Standard Sucker Rod Protection

UEO
Standard Duty External Upset End Tubing Protection

VAS
Vinyl American Standard Association Flange Protectors

VP
Vented Pipe Caps

WNC
Weld Neck Covers

Plugs
Pipe and Flange

Scan for free samples
sales.eu@caplugs.com
+31 1234 567 8910

FC
Stud Hole Flange Protectors

FLGV
Valve Flange Protectors



FPN
Sucker-Rod Plugs

HU
Hammer Union Protection

SFP
Covers for Split-Flange Connections

TLF
Toggle Lock Flange Protector

Spirals

HB
Hose-Bend Restrictors

European Product Protection Solutions Military & Aerospace >>>> 581

Military & Aerospace

For product quantities visit our website:
www.Caplugs.eu

Specification Number	Caplugs USA Series Name	Specification superseded or replaced by, the following specification
NAS 813	EC, SEC	NAS 831
NAS 814	CD	NAS 832
NAS 815	PD	NAS 833
NAS 816	WW, WF	NAS 834
NAS 817	ASC	NAS 835
NAS 818	ASP	NAS 836
NAS 820	EP	NAS 837
NAS 831	EC, SEC	
NAS 832	CD	
NAS 833	PD	
NAS 834	T	
NAS 835	ASC	
NAS 836	ASP	
NAS 837	EP, SEP	
NAS 842	ADP	
NAS 843	K	
NAS 844	SC	
SAE AS85049/138	AS138	
MS/AS 90376 (LD)	EC,EP	SAE AS85049/138
MS/AS 90376 (SD)	SEC, SEP	SAE AS85049/138
MS/AS 90376 (CD)	CEC, CEP	SAE AS85049/138

IMPORTANT NOTICE

All statements, technical information, and recommendations related to Caplugs products are based on information believed to be reliable. However, accuracy and completeness are not guaranteed. Before using any Caplugs product, you must evaluate it to determine whether it is suitable for your intended application. You assume all risks and liabilities associated with such use.

Statements not contained in Caplugs' current publications, or contrary statements in your purchase order, will have no force or effect unless agreed upon in writing by an authorised Caplugs officer.

Material Data Chart
Part 1

Material Data Reference

Introduction: The information provided within this document serves as a reference for the typical properties of materials used in Caplugs products. It is important to note that these details do not represent specific product specifications.

Reference Purposes Only: The data herein is intended solely for reference and general information purposes. It reflects typical properties of materials and should not be considered as definitive product specifications. For precise specifications, or detailed material information, please consult a Technical Sales Representative. For alternative material options, our Customer Service team is available to assist you.

Material Properties and Changes: Please be aware that the properties of Caplugs parts, including those related to material composition and thermal resistance, are subject to change without prior notification. This may reflect ongoing improvements and updates in material technology.

Performance Validation: Independent third-party testing has validated our statements that Flex500® successfully performs under intermittent service temperatures exceeding 500°F. This external testing underlines our commitment to providing reliable and high-performance products.

Data Accuracy and Warranty Disclaimer: While we strive to provide information that is as accurate and comprehensive as possible, Caplugs does not guarantee the accuracy or completeness of this data. No warranty, either expressed or implied, is made regarding the reliability or accuracy of this information.

Copyright and Proprietary Information: © Protective Industries, Inc. 2026. The content of this document is the proprietary information of Caplugs and must not be used or disseminated in any manner that is not expressly authorised. All trademarks, unless specifically stated otherwise, are owned by Protective Industries, Inc.

Additional Considerations: In addition to the standard data presented, we continually seek to advance our material technologies to better meet the evolving needs of our customers. For the most current information, or to discuss specific material advancements, please contact our Technical Sales Team or Customer Service.

The data contained herein is for reference purposes only. This data represents typical properties and not product specifications. For specific part or material information, please contact a Technical Sales Representative at +31 73 643 02 88. For alternate material options, please contact Customer Service.

*Properties of Caplugs® parts are subject to change without notification.

**Independent third party testing supports our published claims of Flex500® successfully performing under intermittent service temperatures of over 500°F/260°C.

The data contained herein is believed to be as accurate as reasonably possible, but Caplugs makes no warranty, express or implied regarding this information.

© Protective Industries, Inc. 2026. The information contained herein is proprietary to Caplugs Europe B.V. and may not be used or disseminated inappropriately. All trademarks, except where noted, are property of Protective Industries, Inc.

Properties	Aluminium	Low Density Polyethylene (LDPE)	High Density Polyethylene (HDPE)	Polypropylene Impact (rubber-modified)	Ethylene Vinyl Acetate	FlexTemp Thermoplastic Rubber	Silicone Rubber
MECHANICAL CHARACTERISTICS							
Specific gravity (density)	2.73	0.910 - 0.925	0.941 - 0.965	0.890. - 0.91	0.920 - 0.950	0.940 - 0.960	1.18
Tensile strength, p.s.i.	31 - 42	600 - 2300	3100 - 5500	2800 - 4400	1440 - 2500	2400 - 3100	200 - 1500
Elongation, %	20% min.	90.0 - 800.0	20.0 - 1000.0	350.0 - >500.0	550 - 900	500 - 620	700
Compressive strength, p.s.i.	11		2700 - 3600	4000 - 6500			
Tear strength (ASTM D1004)							200pli
Impact strength, ft. lb./in. of notch (1/2×1/2 in. notched bar, izod test)	No break	No break	0.5 - 20.0	1.0 - 15.0 @ 73°F	No break		
Hardness, Rockwell		D41 - D46 (Shore) R10	D60 - 70 (Shore)	R50 - R85	D17 - D45 (Shore)		A25 - 80 (Shore)
ELECTRICAL CHARACTERISTICS							
Volume resistivity, ohm/cm³ (50% RH and 23°C)		>1016	>1016	>1015	>1015		
Dielectric constant, 60 cyc.		2.25 - 2.35	2.30 - 2.35	2.3	2.50 - 3.16		
Dissipation (power) factor, 60 cyc		<0.0005	<0.0005	>0.0003	>0.0030		
SERVICE TEMPERATURES							
Continuous °C/°F	343/650	66/150	74/165	121/250	60/140	135/275	232/450
Intermittent °C/°F	343/650	79/175	102/215			149/300	316/600
Brittleness °C/°F	-70/-94	<-70/<-94	-18/0	<-70/<-94	<-68/<-90	0	-32/-29
RESISTANCE CHARACTERISTICS							
Water absorp., 24 hr., 1/8" thick, %	0.0	<0.015	<0.01	<0.01	.05-.13	<.10	
Burning rate (flammability), in./min.		Very Slow (1.04)	Very Slow (1.00-1.04)	Slow		Slow	Very Slow
Effect of sunlight	Unprotected material crazes rapidly. Requires black for complete protection.						Very Resistant
Effect of weak acids	Varies	Resistant	Very Resistant	Completely Resistant	Resistant	Very Resistant	Poor
Effect of strong acids	Varies	Attacked by oxidising acids	Attacked slowly by oxidising acids	Resistant to oxidising acids	Resistant	-	Poor
Effect of weak alkalies	Cleaning Agent	Resistant	Very Resistant	Completely Resistant	Resistant	Very Resistant	Poor
Effect of strong alkalies	Etches	Resistant	Very Resistant	Very Resistant	Resistant	Very Resistant	Poor
Effect of organic solvents	None	Resistant (below 60°C)	Resistant (below 80°C)	Attacked by hydrocarbons and chlorinated hydrocarbons	Resistant	Swells in contact with hydrocarbons and chlorinated hydrocarbons	Moderate
Machine qualities	Fair	Good	Excellent	Good	Fair	Fair	Poor
Clarity (Natural Material)		Translucent to opaque	Translucent to opaque	Translucent	Translucent to opaque	Opaque	Clear to opaque
Abrasion resistance	Low						Low
Properties	Aluminium	Low Density Polyethylene (LDPE)	High Density Polyethylene (HDPE)	Polypropylene Impact (rubber-modified)	Ethylene Vinyl Acetate	FlexTemp Thermoplastic Rubber	Silicone Rubber

Material Data Chart
Part 2

Material Data Reference

Introduction: The information provided within this document serves as a reference for the typical properties of materials used in Caplugs products. It is important to note that these details do not represent specific product specifications.

Reference Purposes Only: The data herein is intended solely for reference and general information purposes. It reflects typical properties of materials and should not be considered as definitive product specifications. For precise specifications, or detailed material information, please consult a Technical Sales Representative. For alternative material options, our Customer Service team is available to assist you.

Material Properties and Changes: Please be aware that the properties of Caplugs parts, including those related to material composition and thermal resistance, are subject to change without prior notification. This may reflect ongoing improvements and updates in material technology.

Performance Validation: Independent third-party testing has validated our statements that Flex500® successfully performs under intermittent service temperatures exceeding 500°F. This external testing underlines our commitment to providing reliable and high-performance products.

Data Accuracy and Warranty Disclaimer: While we strive to provide information that is as accurate and comprehensive as possible, Caplugs does not guarantee the accuracy or completeness of this data. No warranty, either expressed or implied, is made regarding the reliability or accuracy of this information.

Copyright and Proprietary Information: © Protective Industries, Inc. 2026. The content of this document is the proprietary information of Caplugs and must not be used or disseminated in any manner that is not expressly authorised. All trademarks, unless specifically stated otherwise, are owned by Protective Industries, Inc.

Additional Considerations: In addition to the standard data presented, we continually seek to advance our material technologies to better meet the evolving needs of our customers. For the most current information, or to discuss specific material advancements, please contact our Technical Sales Team or Customer Service.

The data contained herein is for reference purposes only. This data represents typical properties and not product specifications. For specific part or material information, please contact a Technical Sales Representative at +31 73 643 02 88. For alternate material options, please contact Customer Service.

*Properties of Caplugs® parts are subject to change without notification.

**Independent third party testing supports our published claims of Flex500® successfully performing under intermittent service temperatures of over 500°F/260°C.

The data contained herein is believes to be as accurate as reasonably possible, but Caplugs makes not warranty, express or implied regarding this information.

© Protective Industries, Inc. 2026. The information contained herein is proprietary to Caplugs Europe B.V. and may not be used or disseminated inappropriately. All trademarks, except where noted, are property of Protective Industries, Inc.

Properties	Poly Vinyl Chloride (PVC) Standard	Poly Vinyl Chloride (PVC) High Temperature	PVC Extrusion	PETG	Flex500	Static Conductive	Static Dissipative	LLDPE	Nylon
MECHANICAL CHARACTERISTICS									
Specific gravity (density)	1.2	1.2	1.2	1.3	1.35	1.06	1.17	0.925 g/cm3	1.13 g/cm3
Tensile strength, p.s.i.	2300	2100	2300	5800	2000	1000	1900	10 Mpa	50 Mpa
Elongation, %	400	270	400	50	150	300	360	>500	
Compressive strength, p.s.i.				7300					
Tear strength (ASTM D1004)	185pli	270pli	185		270pli		200pli		
Impact strength, ft. lb./ in. of notch (1/2×1/2 in. notched bar, izod test)				0.19 - 0.66		No Break			
Hardness, Rockwell	A60 - 70 (Shore)	A80 - 90 (Shore)	A60 - 70 (Shore)	Shore R 108	15 Second Shore A84 - 94	15 Second Shore D 46	A55 - 65 Shore	47 (Shore D)	54 (Shore D)
ELECTRICAL CHARACTERISTICS									
Volume resistivity, ohm/ cm³ (50% RH and 23°C)						100	Surface Resisti-Vity 10 9 OHM/SQ	10 18	
Dielectric constant, 60 cyc.				3 - 4					
Dissipation (power) factor, 60 cyc				20- 300 104					
SERVICE TEMPERATURES									
Continuous °C/°F	93/200	149/300	93/200	62/145	149/300	60/140	60/140	70/158	120/248
Intermittent °C/°F	177/350	246/475	177/350	71/160	260/500	71/160	71/160	90/194	180/356
Brittleness °C/°F	-32/-26		-32/-26	-40/-40		<-67/<-90°F		<-70/158	
RESISTANCE CHARACTERISTICS									
Water absorp., 24 hr., 1/8" thick, %				0.1 to 0.2%					
Burning rate (flammability), in./min.	Slow	Slow	Slow		Slow	Slow	Slow	Very Slow	
Effect of sunlight	Good Resistance	Good Resistance	Good Resistance	Fair Resistance	Good Resistance	Very Resistant	Good Resistance	Limited Resistance	Resistant
Effect of weak acids	Very Resistant	Very Resistant	Very Resistant		Very Resistant	Resistant	Very Resistant	Resistant	Not Resistant
Effect of strong acids	Resistant	Resistant	Resistant		Resistant	Resistant	Resistant	Resistant	Not Resistant
Effect of weak alkalies	Resistant	Resistant	Very Resistant		Very Resistant	Resistant	Very Resistant	Resistant	Resistant
Effect of strong alkalies	Resistant	Resistant	Resistant		Resistant	Resistant	Resistant	Resistant	Resistant
Effect of organic solvents	Good Resistance to alcohols, aliphatic hydrocarbons and oils	Good Resistance to alcohols, aliphatic hydrocarbons and oils	Good resistance to alcohols, aliphatic hydrocarbons and oil		Good Resistance	Resistant	Good Resistance	Resistant	Resistant
Machine qualities	Poor	Poor	Poor	Very Good	Good	Good	Poor	Good	Good
Clarity (Natural Material)	Clear to opaque		Clear to opaque	Clear	Opaque	Opaque	Translucent	Translucent	Opaque
Abrasion resistance	Very Good	Very Good	Very Good	Very Good	Very Good	Low	Very Good		
Properties	Poly Vinyl Chloride (PVC) Standard	Poly Vinyl Chloride (PVC) High Temperature	PVC Extrusion	PETG	Flex500**	Static Conductive	Static Dissipative	LLDPE	Nylon

Material Selection by Temperature

Introduction: Understanding the impact of temperature on material performance is crucial to ensure durability and functionality in specific applications. This guide outlines key considerations for selecting materials, based on their ability to withstand different temperature ranges.

Critical Factors in Choosing Material: Temperature-based selection of material involves several critical factors:

Temperature Range: It is fundamentally important to assess the operational temperature range a chosen material needs to withstand. This starts with the maximum and minimum temperatures the material will be exposed to.

Thermal Stability: Evaluation will be required of how well a material maintains its properties under prolonged exposure to specified temperatures.

Thermal Expansion: Factoring in the material's expansion and contraction in response to temperature changes is essential for maintaining structural integrity.

Heat Resistance: Identifying materials that resist degradation at high temperatures is crucial for applications involving prolonged heat exposure.

Cold Flexibility: Ensuring materials remain flexible and do not become brittle at low temperatures is vital for performance in cold environments.

Practical Application Considerations: When selecting materials, it is also important to:

Consider Environmental Factors: Additional conditions such as humidity, exposure to chemicals, and UV radiation can affect material performance.

Ensure Safety and Compliance: Materials should always comply with relevant safety standards and regulations for their intended use, especially in critical applications.

Reference and Testing: The data set out here is for reference purposes only and represents typical properties of materials. Before finalising your material selection, we encourage you to take advantage of our free sample service. Testing samples in your specific application can provide practical insights into how a material will perform under your unique conditions.

Conclusion: Temperature plays a critical role in material selection, influencing the performance and reliability of components across applications. Thorough understanding and careful consideration of temperature effects on materials will guide you in making informed choices. If you need specialised assistance, it is advisable to consult with materials experts, to ensure optimal functionality and compliance in your specific setting.

PVC

LDPE

HDPE

VMQ

EPDM

More materials available →

Up to 315°C / 600°F

315°C / 600°F	Ultrabake™ (VMQ)
260°C / 500°F	Polyimide (PI)
260°C / 500°F	Fibreglass (FRP)
260°C / 500°F	Silicone (VMQ) and Glass Fibre (FRP)
220°C / 425°F	Polyester (PET)
204°C / 400°F	Teflon (PTFE)
180°C / 356°F	Polyamide (PA) with Polyurethane Coating (PEU)
177°C / 350°F	Poly Vinyl Chloride (PVC)
177°C / 350°F	Ethylene Propylene Diene Monomer (EPDM)
177°C / 350°F	Neoprene (CR)

Up to 149°C / 300°F

149°C / 300°F	Thermoplastic Elastomer (TPE)
149°C / 300°F	Polyamide 6 (PA)
149°C / 300°F	Glass Fibre Reinforced Polyamide (PA GF)
149°C / 300°F	Polyamide 6.6 (PA)
149°C / 300°F	Polypropylene (PP)
149°C / 300°F	Flex500™ (PVC)
149°C / 300°F	Nitrile Butadiene Rubber (NBR)
149°C / 300°F	Cork (CK)
149°C / 300°F	Crepe Paper (CPR) with Rubber Adhesive (RA)
120°C / 248°F	Acrylonitrile Butadiene (NBR)
107°C / 225°F	Lead (Pb)

Up to 80°C / 176°F

80°C / 176°F	High Density Polyethylene (HDPE)
66°C / 150°F	Low Density Polyethylene (LDPE)
66°C / 150°F	Polyethylene (PET)

Standard Option Materials & Colour

Acrylonitrile Butadiene NBR

Yellow
RAL 1021

Aluminium AL

Silver
RAL 9006

Cork CK

Sand Yellow
RAL 1002

Ethylene Propylene Diene Monomer EPDM

Flex500™ PVC

Glass Fibre Reinforced Polyamide PA GF

Black
RAL 9005

High Density Polyethylene HDPE

Yellow	Yellow	Orange	Red	Red	Purple	Blue	Blue
RAL 1017	**RAL 1023**	**RAL 2005**	**RAL 3001**	**RAL 3020**	**RAL 4008**	**RAL 5002**	**RAL 5015**

Neon Green	Green	Black
RAL 6019	**RAL 6037**	**RAL 9005**

High Density Polyethylene HDPE and Sugarcane SO

Black
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification.

Standard Option Materials & Colour

Low Density Polyethylene LDPE

Yellow	Yellow	Yellow	Orange	Red	Red	Red	Blue
RAL 1016	**RAL 1018**	**RAL 2021**	**RAL 2003**	**RAL 3000**	**RAL 3020**	**RAL 3024**	**RAL 5002**

Blue	Blue	Green	Green	Green	Grey	Clear	Clear
RAL 5005	**RAL 5015**	**RAL 6018**	**RAL 6024**	**RAL 6032**	**RAL 7000**	**RAL 9003**	**RAL 9005**

White	Black
RAL 9016	**RAL 9017**

Neoprene CR

Green	Black
RAL 6032	**RAL 9005**

Nitrile Butadiene Rubber NBR

Black
RAL 9005

Colours shown are not exact and for reference only. Please request a colour sample for verification.

Standard Option Materials & Colour

Poly Vinyl Chloride PVC

Yellow	Yellow	Red	Blue	Grey	Tan	Black	Brown
RAL 1016	RAL 1021	RAL 3000	RAL 5017	RAL 7036	RAL 9003	RAL 9005	RAL 8007

Polyamide 6 PA

Yellow	Clear
RAL 1021	RAL 9003

Polyamide 6.6 PA

Yellow	Red	Green
RAL 1021	RAL 3000	RAL 6038

Polyester PET

Yellow	Red	Blue	Green	Green	Tan	Black
RAL 1016	RAL 3024	RAL 5002	RAL 5021	RAL 6032	RAL 9003	RAL 9005

Polyimide PI

Yellow	Amber
RAL 1016	RAL 1027

Colours shown are not exact and for reference only. Please request a colour sample for verification.

Standard Option Materials & Colour

Polypropylene PP

Yellow	Red	Blue	Green	Grey	Grey	Black	Black
RAL 1016	RAL 3000	RAL 5015	RAL 6024	RAL 7000	RAL 7005	RAL 9005	RAL 9017

Thermoplastic Elastomer TPE

Yellow	Yellow	Red	Blue	Green	Grey	Black	Black
RAL 1016	RAL 1018	RAL 3000	RAL 5015	RAL 6024	RAL 7000	RAL 9005	RAL 9017

Ultrabake™ VMQ

Yellow	Orange	Rusty Red	Orange	Red	Pink	Red	Red
RAL 1016	RAL 2008	RAL 2010	RAL 2012	RAL 3000	RAL 3015	RAL 3017	RAL 3018
Red	Pink	Purple	Blue	Light Blue	Blue	Green	Green
RAL 3024	RAL 4003	RAL 4008	RAL 5002	RAL 5014	RAL 5024	RAL 6024	RAL 6032
Clear	Black	White	Grey				
RAL 9003	RAL 9005	RAL 9016	RAL 9022				

Colours shown are not exact and for reference only. Please request a colour sample for verification.

Index

0–9
22-SH Series 405
232-SH Series 422
425-SH Series 423
470-SH Series 424
471-SH Series 425

A
About Caplugs 006
AD-SH Series 442
ADP Series 248
AF-SH Series 465
Agriculture Market 046
AIR-SH Series 473
American Products Overview 564
AR-SH Series 476
ASC Series 141
ASP Series 246
AS138 Series 082
Automotive Market 044
Aviation and Aerospace Market 050

B
BFS Series 132
BM-SH Series 392
BN-SH Series 322
BT100-SH Series 434
BWNP-SH Series 342

C
Caplugs Mug 598
Catalogue Parts Modification 035
CBW Series 503
CD Series 136
CD-SH Series 490
Colour Options 588
CSC Series 395
CSP-SH Series 338
CSPP-SH Series 340
CSW Series 504
CSWF Series 505
Customisation 036

D
DFPP-SH Series 354
Die-Cutting 032
Draft Paper 599

E
E-Z Peel™ Series 460
Electronics Industry 048
Extrusion 033
EZ Series 123

F
Ferrules Series 549
Find Your Tape 438
FP-SH Series 370
FRAS Series 538
Frequently Asked Questions 040

G
GC-SH Series 454
GEO Series 172
GK Series 095
GMB Series 070
GMP Series (Caps) 068
GMP Series (Plugs) 178
GN-SH Series 320

H
H Series 158
HEZ Series 284
HFC Series 288
HFPP-SH Series 352
HTP Series 371
HUP-SH Series 306
HUPH-SH Series 310
HVC Series 272
HWP-SH Series 380
Hydraulics Industry 054

I
IKQ Series 094
Index 592
Injection Moulding 028
Introduction 002

K
K Series 058
K Flange Series 514
KD11-SH Series 418
KP-SH Series 452
KPI Series 060
Kwiky Dot™ Series 456

L
LB Series 168
LEPP-SH Series 356
LF-SH Series 468
LH Series 166
LL Series 164

M
M Series (Caps) 064
M Series (Plugs) 174
Manufacturing Powerhouse 026
Material Data Chart 582
Material Selection by Temperature 586
MDT-SH Series 397
Metal Fabrication 052
Metal Protection Spiral Series 542
Military and Aerospace 580
MSP-SH Series 381
MPP-SH Series 382
MT-SH Series 384

N
NAY Series 420
Netting 034

O
Ordering Samples 038

P
PB-SH Series 449
PC-SH Series 444
PC11-SH Series 407
PC21-SH Series 409
PC25-SH Series 411
PC30-SH Series 412
PC90-SH Series 414
PC198-SH Series 416
PCD-SH Series 470
PCRT-SH Series 472
PCSQ-SH Series 471
PD Series 242
PEC Series 154
PEP Series 240
Pig's Tail™ Rail Series 540
Pig's Tail™ Spiral Series 536
PLC Series 097
PLO Series 096
PMW Series 502
PP-SH 332
PQN Series 098
PQT Series 099
PR-SH Series 447
Product Overview 010
Protective Promise 602
PSN Series 170
PST Series 171
PTM-SH Series 362

R
R Series 076
RC-SH Series 262
RCK-SH Series 387
RU Series 080
Rubber Moulding 031

S
SAE Series 508
Safe-Bundler Series 560
Safe-Fire Series 552
Safe-Sleeve MSHA Series 547
Safe-Sleeve NW PES 546
Safe-Sleeve PP Series 548
Safe-Spiral ABRA Series 528
Safe-Spiral ASTA Series 530
Safe-Spiral BIO Series 524
Safe-Spiral DUO Series 522
Safe-Spiral ECO Series 526
Safe-Spiral MINE+ Series 532
Safe-Spiral Series 520
Safe-Spiral 'YOUR BRAND' Series 534
Safe-Strip Series 556
Safe-Strip Series with Safe-Tool Series 562
Safe-Wrap Series 550
SC Series 062
SC-SH Series 252
SC1-100 Series 421
Service Plug Series 563
SFC Series 301
SFP-SH Series 378
SHPP-SH Series 336
SK1 Series 234
SK2 Series 236
SL1 Series 230
SL2 Series 232
SPP-SH Series 326
SP-SH Series 376
SR Series 238
SRC-SH Series 266
SRT-SH Series 404
ST-SH Series 399
STPS-SH Series 389
SW-Heavy Series 500
SW-Light Series 499
SW-Standard Series 498
SWI Series 501
SWP Series 374

T
T Series (Caps) 072
T Series (Plugs) 180
Table of Content 008
Tapes Selector Guide 436
TCF Series 148
TCE Series 151
TCV Series 138
TCW Series 142
Terms and Conditions 594
TF-SH Series 463
TLF Series 516
TOEL-SH Series 430
TOL Series 426
TP-SH Series 324
TPC Series 220
TPE Series 212
TPF Series 194
TPG Series 218
TPL Series 206
TPM Series 200
TPV Series 226
TPW Series 228
TPY Series 188
TS Series (Caps) 292
TS Series (Plugs) 312
TSV Series (Caps) 296
TSV Series (Plugs) 316

U
UC-SH Series 398
UDPP-SH Series 358
UFP-SH Series 368
UHCP-SH Series 386
UMFP-SH Series 360
UP-SH Series 304
UPH-SH Series 308
US-SH Series 396
UST-SH Series 401
UTM-SH Series 364
UTMLS-SH Series 366
UVCP-SH Series 300
UW-SH Series 372
UWM-SH Series 350
UWPP-SH Series 346
UWPPLS-SH Series 348

V
VC Series 100
VFC Series 122
VFE Series 120
VF Series 510
Vinyl Dip Coating 030
Vinyl Dip Moulding 029
VRF Series 126
VRR Series 130
VSC Series 124
VSR Series 512

W
WC-SH Series 264
WNP-SH Series 344
Wrapman Series 561

Z
ZC-L-SH Series 270
ZC-S-SH Series 268

Caplugs Europe
Terms and Conditions of Sale

1. Applicability.
These terms and conditions of sale (these "Terms") are the exclusive terms which govern the sale of any products or services (collectively "Products") by Caplugs Europe B.V. ("Caplugs") and any other European company affiliated with Caplugs Europe B.V, to the customer identified in the relevant agreement, quotation, work order, purchase order, order acknowledgement or invoice ("Customer"). These Terms apply to and are incorporated into any agreement to which they are attached and any quotation, work order, purchase order, or invoice accompanying these Terms (collectively, the "Agreement"). These Terms shall become effective upon the earliest of: (i) Caplugs issuing a quotation, order acknowledgement or invoice to Customer; (ii) Customer's receipt of the Products; (iii) Caplugs' receipt of payment in full or in part for the Products; or (iv) Customer's and Caplugs' execution of a written agreement regarding the sale of Products into which these Terms are incorporated.

2. Acceptance.
These Terms prevail over any of Customer's general terms and conditions of purchase regardless of whether or when Customer has submitted its purchase order or such terms, and notwithstanding Caplugs' use of Customer's purchase order number as an accommodation. Fulfilment of Customer's order does not constitute acceptance of any of Customer's terms and conditions and does not serve to modify or amend these Terms. Any terms and conditions proposed by Customer in any product inquiry, purchase order or other document that are different from, conflict with, or add to these Terms shall be deemed to materially alter the offer and are hereby objected to and rejected by Caplugs.

3. Purchase Price.
Customer shall pay Caplugs the purchase price for the Products as listed in Caplugs' quotation, order acknowledgement or as otherwise set forth in Caplugs' invoice. All prices are in EURO. Caplugs may change its prices at any time without notification; provided, however, that unless revoked prior to acceptance, prices set forth in Caplugs' quotation shall be valid only for the period set forth in such quotation. Caplugs' prices are exclusive of insurance, shipping, handling, and sales, use and excise taxes and any other similar taxes, duties and charges of any kind imposed by any governmental authority on any amounts payable by Customer. Customer shall have the sole responsibility for payment of all such insurance, shipping, handling, taxes, duties and charges with respect to the purchase of any Products. Caplugs supplies standard material certification with all shipments. Special certification requirements, if accepted by Caplugs, may be subject to additional charges.

4. Payment Terms.
Customer shall pay all invoices within thirty (30) days from the date of the invoice (unless specified otherwise on the invoice). If Customer fails to make any payments when due, Customer may be charged interest of one and one-half percent (1.5%) per month (eighteen percent (18%) per annum) or the maximum rate permitted by applicable law, whichever is less, on any overdue balance. Caplugs is not obligated to extend credit or financing terms to Customer. Caplugs may in its sole discretion revoke any credit extended to Customer and require payment in full prior to Caplugs' delivery of Products. If Caplugs retains a collection agency or legal counsel or incurs any out-of-pocket expenses to collect payments from Customer, all such costs will be added to the sums due, will bear interest at the rate set forth above, and will be the responsibility of Customer. In addition to all other remedies available under these Terms or at law (which Caplugs does not waive by exercising any rights hereunder), Caplugs shall be entitled to suspend the delivery of any Products if Customer fails to pay any amounts when due hereunder. Customer shall not withhold payment of any amounts due and payable by reason of any set-off of any claim or dispute with Caplugs, whether relating to Caplugs' breach, bankruptcy or otherwise.

5. Delivery.
Delivery of all Products shall be made Ex Works Caplugs' facility specified in the applicable quotation and/or purchase order ("Delivery Point"), and all freight and shipping charges are the responsibility of Customer. There may be split deliveries and shipments from multiple Caplugs facilities, each with separate freight charges. Crating and pressure heat treated pallets may be subject to additional charges for each pallet required. Manner of freighting and shipping and routing, is at the discretion of Customer unless otherwise agreed upon in writing by Caplugs and Customer. Products will be delivered within a reasonable time after receipt of Customer's purchase order, but Caplugs shall not be liable for any delays, loss or damage in transit. Caplugs reserves the right to make delivery of Products in instalments; all such instalments will be separately invoiced and paid for when due.

6. Delivery Deadlines.
The delivery deadlines stated by Caplugs are estimates. In determining delivery deadlines Caplugs assumes that the engagement can be carried out under the circumstances as they are known to Caplugs at that moment. Delivery deadlines do not commence until both parties have agreed on all commercial and technical details, all necessary data, final and approved drawings, etc. are in the Caplugs possession, the payment or instalment agreed has been received and the conditions necessary for the performance of the engagement have been met.

7. Title and Risk of Loss.
Title and risk of loss shall pass to Customer upon delivery of the Products at the Delivery Point as specified in article 5. As collateral security for the payment of the purchase price of the Products, Customer hereby grants to Caplugs a lien on and security interest in and to all of the right, title and interest of Customer in, to and under the Products, wherever located, and whether now existing or hereafter arising or acquired from time to time, and in all accessions thereto and replacements or modifications thereof, as well as all proceeds (including insurance proceeds) of the foregoing. With regard to Products that are returned to Caplugs, title and risk of loss remain with Customer until receipt and acceptance of the Products by Caplugs.

8. Impracticability of the Engagement.
Caplugs is entitled to suspend the fulfilment of any obligations if any circumstances that could not be foreseen when the agreement was concluded and that are beyond Caplugs' influence temporarily prevent the fulfilment of those obligations. Circumstances that Caplugs could not foresee and that are beyond Caplugs influence are understood to include (but are not limited to) the circumstance that Caplugs own suppliers and/or subcontractors fail to meet their obligations, or fail to do so in time, the weather, earthquakes, fire, loss or theft of tools, the destruction of materials to be processed, road blocks, strikes or work stoppages and restrictions on import or trade. Caplugs is no longer entitled to suspend the fulfilment of any obligations when the temporary impossibility of performance has lasted for more than six months. The agreement may not be dissolved until that term has lapsed, and only in respect of those obligations that have not been fulfilled. In that event, the parties are not entitled to any compensation for damages incurred as a result of that dissolution.

9. Order Quantities and Minimum Order Value.
Order quantities shall be increased or decreased to the nearest standard packaging quantity (Standard Carton, Mini Pak or Micro Pak). Caplugs may change the quantities in its Standard Carton, Mini Pak or Micro Pak at any time without notification. Delivery of 5% more or less than the quantity ordered shall constitute fulfilment of the order for custom closures or standard closures run in nonstandard colours or materials. Caplugs has instituted a policy setting the minimum order quantity for all product purchases at €300. This measure is designed to ensure the efficient handling and processing of orders, thereby allowing us to uphold the high standards of service and product quality expected by our customers. Orders that do not meet this specified minimum order value will incur a surcharge of €50.

10. Cancellation.
No order accepted by Caplugs may be cancelled or modified by Customer except upon the written agreement of Caplugs. In the event of cancellation or deferral of deliveries on an order, Customer assumes immediate liability for the completed part of the order and any material or tooling work performed, and Caplugs may require immediate payment of the amounts due.

11. Reliance.
Caplugs may rely upon all information, data, dimensions, blueprints, schematics, diagrams, specifications, or other drawings or representations, whether oral or in writing, provided by or on behalf of Customer and shall have no responsibility to make any independent inquiry or investigation thereof. Caplugs assumes no obligation or liability for any advice or assistance given or results obtained; all such advice or assistance is given and accepted at Customer's risk. Customer assumes all responsibility for evaluating the Products and determining the suitability of the Products for Customer's intended application, and Customer assumes all risks and liability associated with such use.

12. Inspection and Acceptance.
Customer shall have thirty (30) days from receipt of Products to inspect the Products for conformance with the specifications set forth in Caplugs' quotation, order acknowledgement, or as may otherwise be mutually agreed by the parties (the "Specifications"). After termination of this 30-day period, the customer's right of complaint lapses. Customer may reject Products that do not substantially conform to the Specifications ("Non-Conforming Products"). All rejections shall be made in writing to Caplugs and provide sufficient detail as to the reason for such rejection.

13. Returns.
No returns will be accepted without a Return Material Authorization ("RMA") number. To return Non-Conforming Products, Customer shall contact Caplugs Customer Service within thirty (30) days of delivery for a RMA number. Caplugs has sole discretion to determine, after examination, whether returned Products are Non-Conforming Products, and Caplugs' determination shall be binding on Customer. Customer's sole and exclusive remedy for returned Products that have been found to be Non-Conforming Products shall be either, in Caplugs' sole discretion: (i) replacement of the returned Products, or (ii) reimbursement of the amount paid by Customer for the returned Products. All other returns are limited to Standard Cartons and are subject to a 30% restocking fee if received within thirty (30) days after shipment, or a 50% restocking fee if received thirty (30) to ninety (90) days after shipment. No returns will be accepted more than ninety (90) days after shipment. Mini Packs and Micro Packs cannot be returned. Sterile items and pre-filled containers cannot be returned.

14. Limited Guarantee.
Caplugs guarantees that, upon delivery, Products shall be free from defects in material and manufacture and materially conform to the Specifications. Any products manufactured by a third party are not covered by the foregoing warranty; as to such third party products, Caplugs hereby passes through to Customer any warranties to the extent permitted by the original manufacturer. Caplugs shall not be liable for a breach of the warranty set forth in this article 12 if: (i) Customer makes any further use of such Products after giving such notice; (ii) the defect arises because Customer failed to follow Caplugs' instructions as to the storage, installation, commissioning, use or maintenance of the Products; or (iii) Customer alters or repairs such Products without the prior written consent of Caplugs.

15. Limitation of Liability.
If, with due observance of the foregoing Caplugs is liable towards the Customer, and is held to compensate the latter's damage, the obligation to compensate the damage will be limited to compensating the direct damage, not exceeding the amount under the Agreement (exclusive of VAT). Direct damage is understood to mean exclusively: (I) repair, recovery or replacement costs, (II) the reasonable costs for establishing the cause and extent of the damage, (III) reasonable costs incurred to prevent or limit the damage to the extent that the other

Caplugs Europe
Terms and Conditions of Sale

party demonstrates that these costs have led to containment of the direct damage as referred to in these general terms and conditions. In the case that the insurer pays an amount with respect to the Customers' liability as referred to above, the compensation obligation will also be limited to the amount paid by the insurer for the respective case or the amount covered by the insurance. The Customers' liability shall in any case be excluded for indirect or consequential damage including in any case: - Other damage than the damage for Caplugs for rectifying the direct consequences of the failure to comply; - Damage due to loss of profit, downtime, perishing or deterioration of goods as a result of downtime, loss of savings, stagnation or reduced goodwill; - Damage resulting from third party claims including the Customers'; - Damage in connection with the use of items by Caplugs stipulated by Customer such as but not limited to: installations, tools, machines, materials or data, information or software from third parties; - Damage in connection with the Contractor's engaging of suppliers, programmers, advisers or controllers stipulated by the Customer; - Damage to mutilation, destruction or loss of data, digital equipment settings, software, information, details or documents. Customer indemnifies Caplugs against all claims from third parties for product liability stemming from defects in Products provided by Customer to third parties that consisted of or included products and/ or materials provided by Caplugs.

16. Force Majeure.
Caplugs shall not be liable or responsible to Customer, nor be deemed to have defaulted or breached the Agreement, for any failure or delay in fulfilling or performing any term of the Agreement when and to the extent such failure or delay is caused by or results from acts or circumstances beyond the reasonable control of Caplugs including, without limitation, acts of God, flood, fire, earthquake, explosion, governmental actions, war, invasion or hostilities (whether war is declared or not), terrorist threats or acts, riot, or other civil unrest, national emergency, revolution, insurrection, epidemic, regional public health emergency, lockouts, strikes or other labour disputes (whether or not relating to either party's workforce), or restraints or delays affecting carriers or inability or delay in obtaining supplies of adequate or suitable materials, materials or telecommunication breakdown or power outage. Upon any of the above events, Caplugs will have the additional right to extend the time to provide the Products under the Agreement or to cancel any open purchase orders without any resulting liability to Customer

17. Confidential Information.
Customer agrees that all information and data disclosed or submitted by Caplugs under or pursuant to the Agreement, including, without limitation, that contained in drawings or specifications, is proprietary to Caplugs and will not be used by Customer for any purpose other than fulfilling the Agreement, without Caplugs' prior written consent.

18. Assignment.
Customer shall not assign, delegate, or otherwise transfer any of its rights or obligations under the Agreement without the prior written consent of Caplugs. Any such assignment, delegation, or transfer without Caplugs' prior written consent shall be void. Caplugs may assign, delegate, or transfer any and all of its rights and obligations under the Agreement at any time and without prior written consent of Customer.

19. Governing Law and Jurisdiction in case of disputes.
Dutch Law. The Agreement shall be construed and enforced exclusively in accordance with the substantive and procedural laws of the Netherlands. The United Nations Convention on Contracts for the International Sale of Goods (Vienna Sales Convention 1980) does not apply to this Agreement. Choice of court. All disputes arising from a contract concluded between Caplugs and Customer shall be adjudicated by the competent court of the district in which Caplugs is located as the court in the first instance. This however with the proviso that if a particular court is mandatorily appointed as competent court then the dispute shall be decided in the first instance by the court so appointed without prejudice to the Caplugs' right to seizure or to take other provisional measures at the place(s) and before the courts that Caplugs wishes.

Feel free to contact us!

(+31) 73 643 02 88
sales.eu@caplugs.com

European Product Protection Solutions

Spot Any Mistakes in the Catalogue? Tell Us So We Can Make Them Right!

And You Will Be Rewarded with A **Special Caplugs Mug!**

Thank you

*Please note, the specific mug illustrated may vary, based on stock and availability.

A
*B
REF
C

A
*B
REF
C

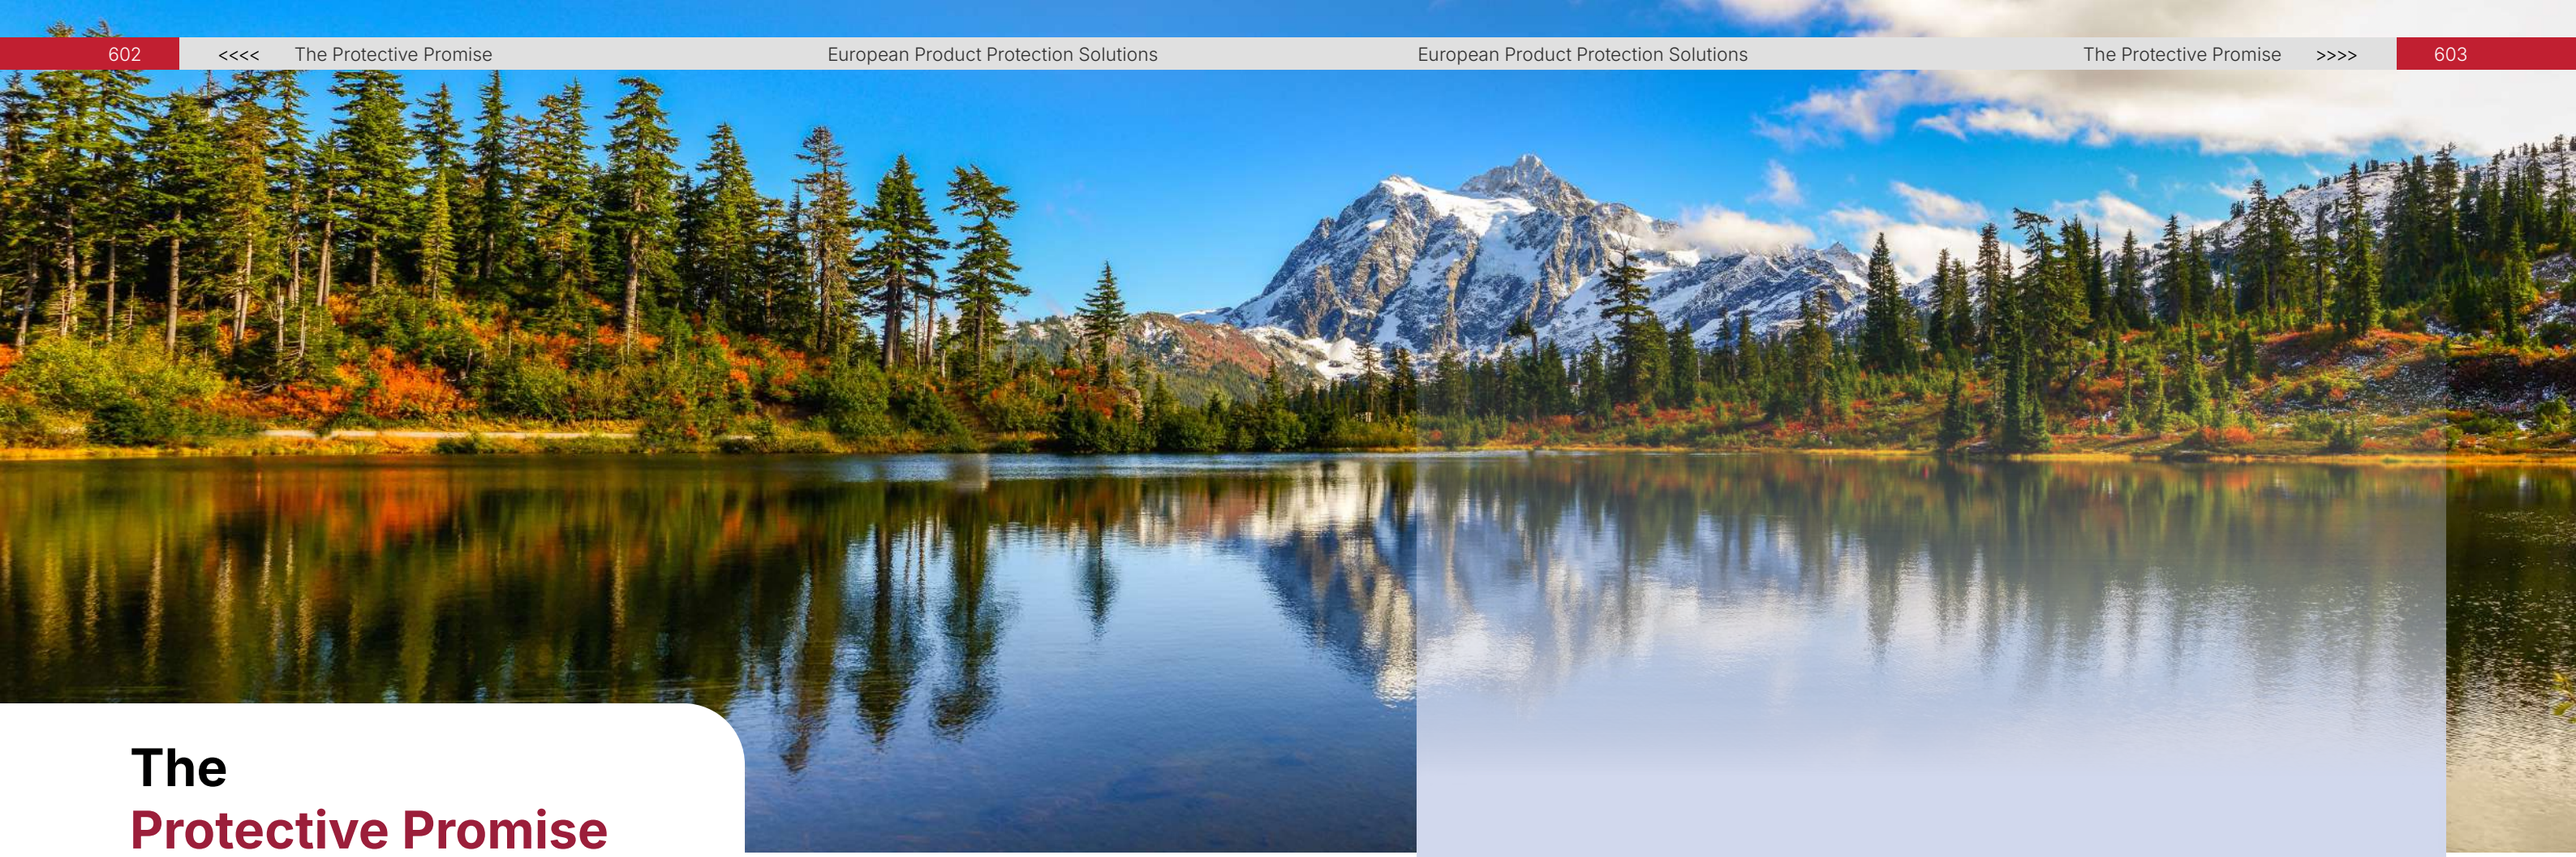

The Protective Promise

The Protective Promise is more than just sustainability. It's what drives us to minimise our environmental footprint and maximise the positive influence on our employees, their families and the communities we call home.

Protective Industries, Inc., our parent company, is committed to The Protective Promise. This ongoing innovation and improvement programme aims to achieve a better and greener future by focussing on two key areas.

First, our people. Our employees are the heart of creating and delivering value for our customers. We support a work environment where our employees can find continuous opportunities for growth, and can enjoy diversity, opportunity and satisfaction in the jobs they do and the teams we've created. Our goal is to be the employer of choice, providing learning and development and encouraging open feedback, creating rewarding careers and maximising our positive impact on employees, their families and the communities where we operate.

Second, our planet. We are investing in new technologies and practices to reduce our carbon footprint and contribute to a healthier world. Throughout our operations, we are continually looking at innovative solutions to curb wastage, reduce consumption of resources and utilise renewable energy sources. As a business, we aim to be constantly working to go beyond compliance, becoming ever more responsible, ethical and sustainably successful over time.

Protective Industries, Inc. | caplugs MOKON Tri-Star Protectors FROM CAPLUGS

Invest
In Our People

Focus
On Employee
Satisfaction

Make
Protective Industries
The Employer Of Choice

The Protective Promise is that – our commitment for our people and our planet. Find out more about our efforts and initiatives at *protectiveindustries.com/the-protective-promise*.

The Leader in Plastic Product Protection

Caplugs is the leader in product protection, masking solutions and custom moulded components. With 13 facilities and a large team of in-field sales managers across the globe, we provide the personalized service, range of capabilities, manufacturing expertise and scalable infrastructure to be your trusted partner.

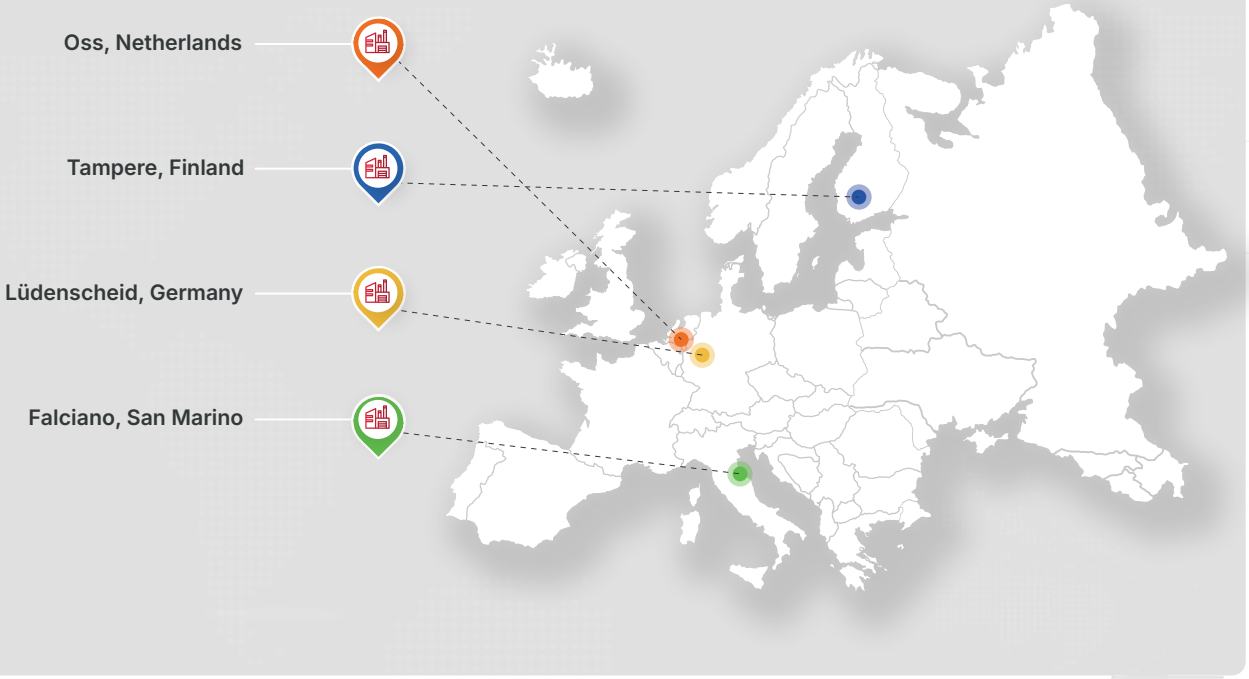

Caplugs Europe

Nieuwe Waterweg 10
5347 JS Oss, The Netherlands

Any questions?

Our Product Experts are happy to help you

Team Caplugs

+31 73 643 02 88
sales.eu@caplugs.com
www.caplugs.eu

2026/1/0100